


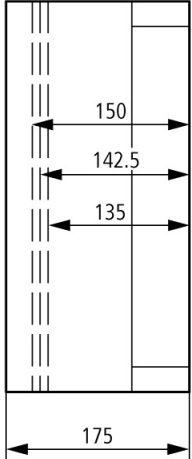

**Panel enclosure, with gland plate and cable glands,
HxWxD=375x250x175mm**

Part no. KST34-150
Catalog No. 074520
EL-Nummer 2502292
(Norway)

Delivery program

Product range			xEnergy Safety Ci
Basic function			Basic enclosures
Product function			Panel enclosure with gland plates fitted
Single unit/Complete unit			Stand-alone device
Standards			EN 62208 EN 61439-2
Degree of Protection			IP65
Description			Sealable cover fasteners Sides closed, but with full area knockout Open top Fitting of cable supports in the distribution board with wedge-lock fastener Gland plate can be split, cables can be inserted from the front
Colour			RAL 7035, light gray (base) Transparent, smoky gray (cover)
Width		mm	250
Height		mm	375
Depth		mm	175
Mounting depth with mounting plate		mm	150
Mounting depth for mounting rail 7.5 mm height		mm	142.5
Mounting depth for mounting rail 15 mm height		mm	135
Dimensions		mm	
Enclosure depth			
Legend for the graphic			Dimensions from top: Mounting depth with mounting plate Mounting depth for mounting rail 7.5 mm height Mounting depth for mounting rail 15 mm height Enclosure depth
Enclosure depth		mm	
Cable entry			2 x 14 - 54

Technical data

General

Standards			EN 62208 EN 61439-2
Ambient temperature		°C	-40 - +80
Ambient temperature			
Mean value over 24 hours		°C	35
Limit values		°C	
Ambient temperature limit value min.		°C	-5
Ambient air temperature, limit values max.		°C	40
Degree of Protection			IP65
Protection type			IP65 (Enclosure) IP65 (KST cable entries from below) IP64 (KST cable entries from above) IP00 (Cable entry open)
Components			Switchgear assembly components are type-tested. They are available individually for the self-assembly of switchgear installations, distribution boards and control panels.
Devices that can be fitted			The reference values indicated in the table apply to the basic elements of the distribution board. As far as devices, terminals etc. fitted into the enclosures are concerned, their own specific technical data and rated values apply.
Standards			
TTA - Type Tested Assemblies			IEC/EN 60439-1, VDE 0660 Part 500
Low-voltage fuses			IEC/EN 60269, VDE 0636
Type test			VDE 0660 Part 500, IEC/EN 60439-1
Creepage and clearance distances			III/3 to IEC/EN 60439-1
Flammability characteristics - Glow rod test			VDE 0304 Part 3 level IIb, level IIb to IEC 60707
Regulation for the fire resistance tests of electrical products, their modules and components, glow wire test			VDE 0471 Part 2
Operating and ambient conditions to VDE 0660 Part 500			
Ambient temperature			
Mean value over 24 hours		°C	35
Limit values		°C	-5 ... 40
Indoor installation			
Relative humidity			90 % (at 20°C) 50% (at 40°C)
Altitude		m	Max. 2000
Protection type			IP65 (Enclosure) IP65 (KST cable entries from below) IP64 (KST cable entries from above) IP00 (Cable entry open)
Mounting grid		mm	25 (DIN 43660)
Surface finish			Galvanized Passivated

Material characteristics

Surface finish			Galvanized Passivated
----------------	--	--	--------------------------

Design verification as per IEC/EN 61439

Technical data for design verification			
Heat dissipation, at an ambient temperature of 35°C, delta T: 20 degrees in top of the enclosure, calculated as per IEC 60890			
Individual enclosure for wall mounting	P _V	W	20
Starting enclosure for wall mounting	P _V	W	19
Middle enclosure for wall mounting	P _V	W	17
Heat dissipation, at an ambient temperature of 35°C, delta T: 35 degrees in top of the enclosure, calculated as per IEC 60890			
Individual enclosure for wall mounting	P _V	W	41
Starting enclosure for wall mounting	P _V	W	38
Middle enclosure for wall mounting	P _V	W	34
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			

10.2.2 Corrosion resistance		Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures		Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat		Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Lower part: 960 °C / cover: 850 °C; meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation		Not relevant to indoor installations.
10.2.5 Lifting		10 kg per enclosure with support frame and lifting aid met; assembled and secured as per the latest applicable instruction leaflet.
10.2.6 Mechanical impact		IK10
10.2.7 Inscriptions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES		IP65
10.4 Clearances and creepage distances		Is the panel builder's responsibility.
10.5 Protection against electric shock		Protection class 2, therefore not applicable.
10.6 Incorporation of switching devices and components		Is the panel builder's responsibility.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		$U_i = 1000 \text{ V AC}$
10.9.3 Impulse withstand voltage		8 kV
10.9.4 Testing of enclosures made of insulating material		Meets the product standard's requirements.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility.
10.13 Mechanical function		Meets the product standard's requirements.

Technical data ETIM 7.0


Distribution boards (EG000023) / Empty cabinet (EC000058)

Electric engineering, automation, process control engineering / Electrical installation, device / Electrical distribution system (incl. small distribution board) / Empty cabinet (small distribution board) (ecl@ss10.0.1-27-14-24-08 [ACN385011])

Mounting method		Surface mounted (plaster)
Type of cover		Cover
Cover model		Closed
Type of door		None
Transparent cover/door		Yes
With lock		No
Nominal current (In)	A	1600
Height	mm	375
Width	mm	250
Depth	mm	175
Built-in depth	mm	150
Internal depth	mm	150
Plate thickness cabinet	mm	6
Plate thickness door/cover	mm	6
Colour		Grey
RAL-number		7035
Number of modules		1
Number of rows		0
Width in number of modular spacings		9
Number of openings for flange plates		3
Extension possible		Yes
Number of conduit inlets		60
Material housing		Plastic
Surface protection		Other
With mounting plate		No
Suitable for outdoor use		Yes
Suitable for lightning protection		Yes

Degree of protection (IP)		IP65
Degree of protection (NEMA)		Other
Protection class		II
Impact strength		IK10
Circuit integrity		Other

Dimensions

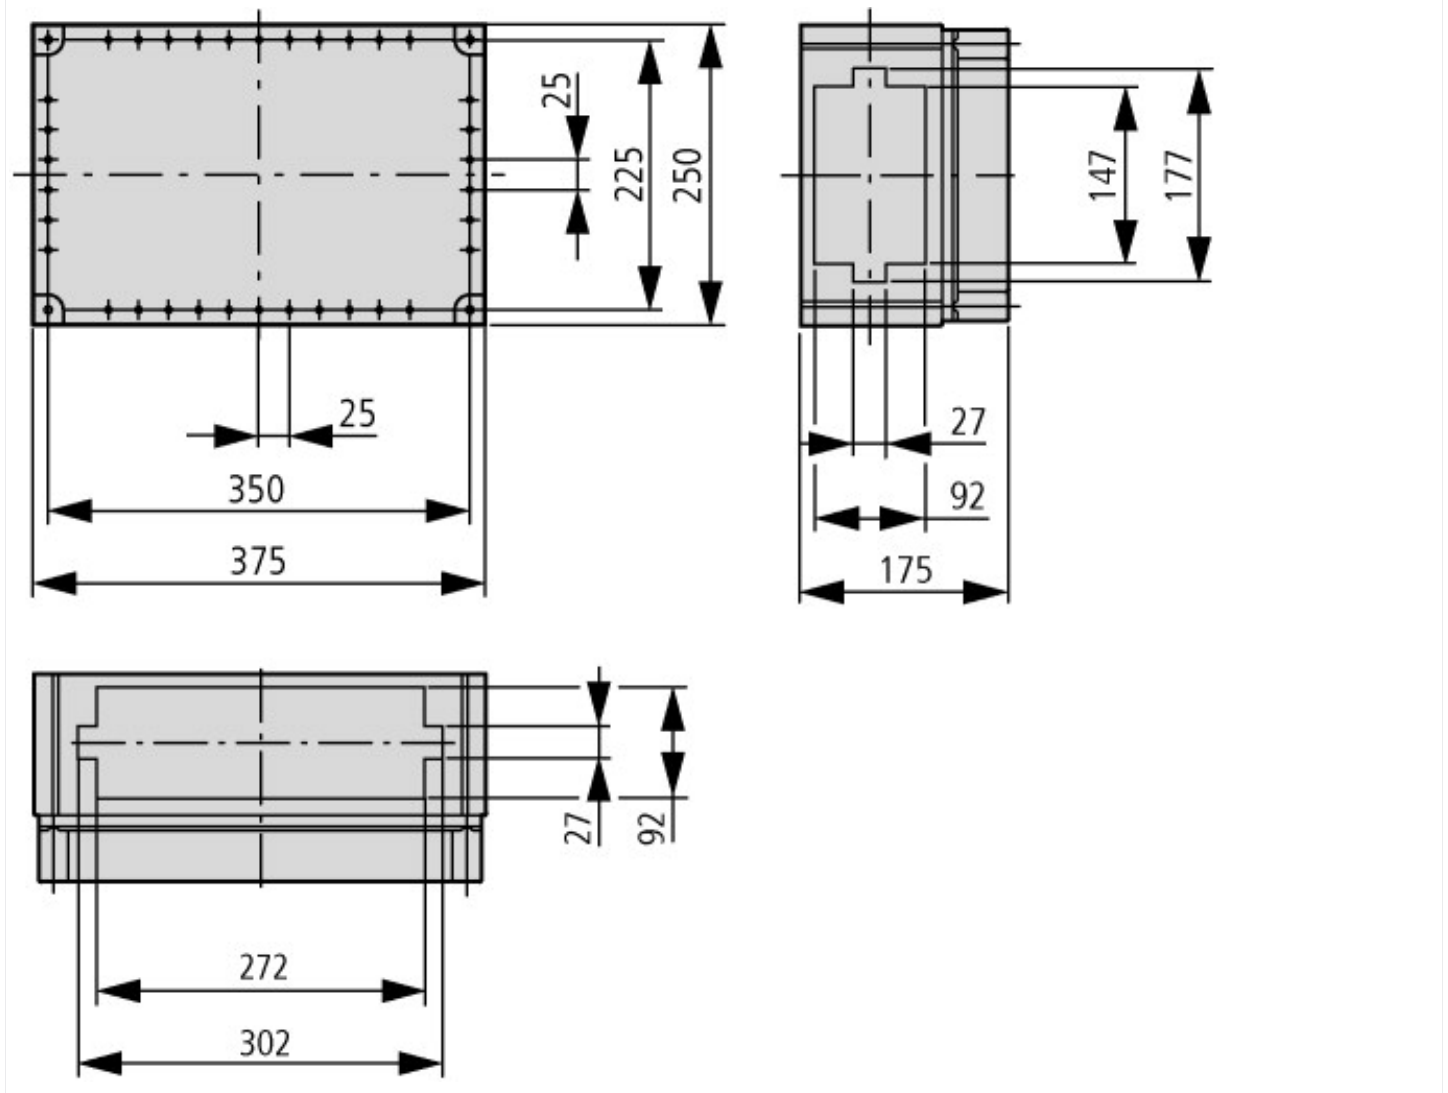

Additional product information (links)

AWA32-567 Ci insulated housings

AWA32-567 Ci insulated housings ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/05670392.pdf

AWA3200-0572 Cable clamps

AWA3200-0572 Cable clamps ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/05720588.pdf

Manufacturer's Declaration CI-RoHS ftp://ftp.moeller.net/DOCUMENTATION/PDF/2013-01-31_Ci_RoHS.pdf

Declaration of conformity ftp://ftp.moeller.net/DOCUMENTATION/PDF/ci_ce.pdf

[allowInterrupt=1&RevisionSelectionMethod=La http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&model certification xEnergy Safety Ci](http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&model%20certification%20xEnergy%20Safety%20Ci)

[allowInterrupt=1&RevisionSelectionMethod=La http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&Save time – we assist you with expert pre-assembly](http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&Save%20time%20-%20we%20assist%20you%20with%20expert%20pre-assembly)

[allowInterrupt=1&RevisionSelectionMethod=La http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&product information xEnergy Safety Ci](http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&product%20information%20xEnergy%20Safety%20Ci)

tool for calculating the power loss for switching device combinations <http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/TCTool/index.htm>

configurator - xEnergy family <http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/xEnergyMainSupport/index.htm>