



Switch-disconnector, DCM, 40 A, 3P + N (solid), Stop Function optional, Without rotary handle and drive shaft, Vertical connection



Part no. DCM-40/1-SK
Catalog No. 1314105

Delivery program

| | | | |
|---|-------|-----|--|
| Product range | | | Switch-disconnector Main switch maintenance switch |
| Part group reference | | | DCM |
| Stop Function | | | optional |
| | | | Without rotary handle and drive shaft |
| Number of poles | | | 3P + N (solid) |
| Auxiliary contacts | | | |
| | | N/O | 0 |
| | | N/C | 0 |
| Degree of Protection | | | IP20 |
| Design | | | surface mounting |
| | | | |
| Contact sequence | | | |
| Motor rating AC-23A, 50 - 60 Hz | | | |
| 400 V | P | kW | 20 |
| Rated uninterrupted current | I_u | A | 40 |
| Note on rated uninterrupted current I_u | | | Rated uninterrupted current I_u is specified for max. cross-section. |
| Connection technique | | | Vertical connection |

Technical data

| | | | |
|---------------------------------------|-----------|----|---|
| General | | | |
| Standards | | | IEC/EN 60947, VDE 0660, IEC/EN 60204 Switch-disconnector according to IEC/EN 60947-3 |
| Certifications | | | CE, RoHs, KEMA, EAC, Lloyds |
| Ambient temperature | | | |
| Operation | θ | °C | -25 - +55 |
| Storage | θ | °C | -30 - +80 |
| Overvoltage category/pollution degree | | | III/3 |
| Rated impulse withstand voltage | U_{imp} | kV | 6 |
| Rated insulation voltage | U_i | V | 690 |
| Mounting position | | | As required |

Contacts

| | | | |
|---|-----------|-------------------|--|
| Mechanical variables | | | |
| Number of poles | | | 3P + N (solid) |
| Auxiliary contacts | | | |
| | | N/O | 0 |
| | | N/C | 0 |
| Electrical characteristics | | | |
| Rated operational voltage | U_e | V AC | 415 |
| Rated uninterrupted current | I_u | A | 40 |
| Note on rated uninterrupted current I_u | | | Rated uninterrupted current I_u is specified for max. cross-section. |
| Short-circuit rating | | | |
| fuse | | | 50 |
| Rated conditional short-circuit current | I_q | kA | 50 |
| Breaking current | | kA | 7 |
| max. let-through energy | | kA ² s | 12 |
| Rated short-time withstand current (1 s current) | I_{cw} | A _{rms} | 1000 |
| Note on rated short-time withstand current I_{cw} | | | Current for a time of 1 second |
| Rated short-circuit making capacity | I_{cm} | kA _{eff} | 2.2 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 3 |

Switching capacity

| | | | |
|---|------------|----|-------|
| Rated breaking capacity $\cos \varphi$ to IEC 60947-3 | | A | |
| 400/415 V | | A | 320 |
| Safe isolation to EN 61140 | | | |
| Current heat loss per contact at I_e | | W | 3 |
| Lifespan, mechanical | Operations | | 10000 |
| AC | | | |
| AC-21A | | | |
| Rated operational current switch | | | |
| 400 V 415 V | I_e | A | 40 |
| AC-22A | | | |
| Rated operational current switch | | | |
| 400 V 415 V | I_e | A | 40 |
| AC-23A | | | |
| Rated operational current switch | | | |
| 400 V 415 V | I_e | A | 40 |
| Motor rating AC-23A, 50 - 60 Hz | P | kW | |
| 400 V 415 V | P | kW | 20 |

Terminal capacities

| | | | |
|--------------------------------------|--|-----------------|----------|
| Solid | | mm ² | 2.5 - 16 |
| Flexible with ferrules to DIN 46228 | | mm ² | |
| flexible | | mm ² | 1.5 - 25 |
| Stripping length | | mm | 14 |
| Tightening torque for terminal screw | | Nm | 2 |

Technical safety parameters:

| | | | |
|-------|--|--|---|
| Notes | | | B10 _d values as per EN ISO 13849-1, table C1 |
|-------|--|--|---|

Design verification as per IEC/EN 61439

| | | | |
|--|------------|----|-----|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 40 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 3 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 0 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 0 |
| Heat dissipation capacity | P_{diss} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |


| | | | |
|--|--|----|--|
| Operating ambient temperature max. | | °C | 55 |
| IEC/EN 61439 design verification | | | |
| 10.2 Strength of materials and parts | | | |
| 10.2.2 Corrosion resistance | | | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | | | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | | | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | | | Meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | | | Meets the product standard's requirements. |
| 10.2.5 Lifting | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.6 Mechanical impact | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.2.7 Inscriptions | | | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.4 Clearances and creepage distances | | | Meets the product standard's requirements. |
| 10.5 Protection against electric shock | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.6 Incorporation of switching devices and components | | | Does not apply, since the entire switchgear needs to be evaluated. |
| 10.7 Internal electrical circuits and connections | | | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | | | Is the panel builder's responsibility. |
| 10.9 Insulation properties | | | |
| 10.9.2 Power-frequency electric strength | | | Is the panel builder's responsibility. |
| 10.9.3 Impulse withstand voltage | | | Is the panel builder's responsibility. |
| 10.9.4 Testing of enclosures made of insulating material | | | Is the panel builder's responsibility. |
| 10.10 Temperature rise | | | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.12 Electromagnetic compatibility | | | Is the panel builder's responsibility. The specifications for the switchgear must be observed. |
| 10.13 Mechanical function | | | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed. |

Technical data ETIM 7.0

| | | | |
|---|----|--|-----------|
| Low-voltage industrial components (EG000017) / Switch disconnecter (EC000216) | | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Switch disconnecter (ecI@ss10.0.1-27-37-14-03 [AKF060013]) | | | |
| Version as main switch | | | Yes |
| Version as maintenance-/service switch | | | Yes |
| Version as safety switch | | | No |
| Version as emergency stop installation | | | No |
| Version as reversing switch | | | No |
| Number of switches | | | 1 |
| Max. rated operation voltage Ue AC | V | | 415 |
| Rated operating voltage | V | | 415 - 415 |
| Rated permanent current Iu | A | | 40 |
| Rated permanent current at AC-23, 400 V | A | | 40 |
| Rated permanent current at AC-21, 400 V | A | | 40 |
| Rated operation power at AC-3, 400 V | kW | | 0 |
| Rated short-time withstand current Icw | kA | | 1 |
| Rated operation power at AC-23, 400 V | kW | | 0 |
| Switching power at 400 V | kW | | 20 |
| Conditioned rated short-circuit current Iq | kA | | 0 |
| Number of poles | | | 3 |
| Number of auxiliary contacts as normally closed contact | | | 0 |
| Number of auxiliary contacts as normally open contact | | | 0 |
| Number of auxiliary contacts as change-over contact | | | 0 |
| Motor drive optional | | | No |
| Motor drive integrated | | | No |
| Voltage release optional | | | No |

| | | |
|---|--|--|
| Device construction | | Built-in device fixed built-in technique |
| Suitable for ground mounting | | Yes |
| Suitable for front mounting 4-hole | | No |
| Suitable for front mounting centre | | No |
| Suitable for distribution board installation | | Yes |
| Suitable for intermediate mounting | | No |
| Colour control element | | Other |
| Type of control element | | Other |
| Interlockable | | No |
| Type of electrical connection of main circuit | | Screw connection |
| Degree of protection (IP), front side | | IP20 |
| Degree of protection (NEMA) | | Other |

Dimensions

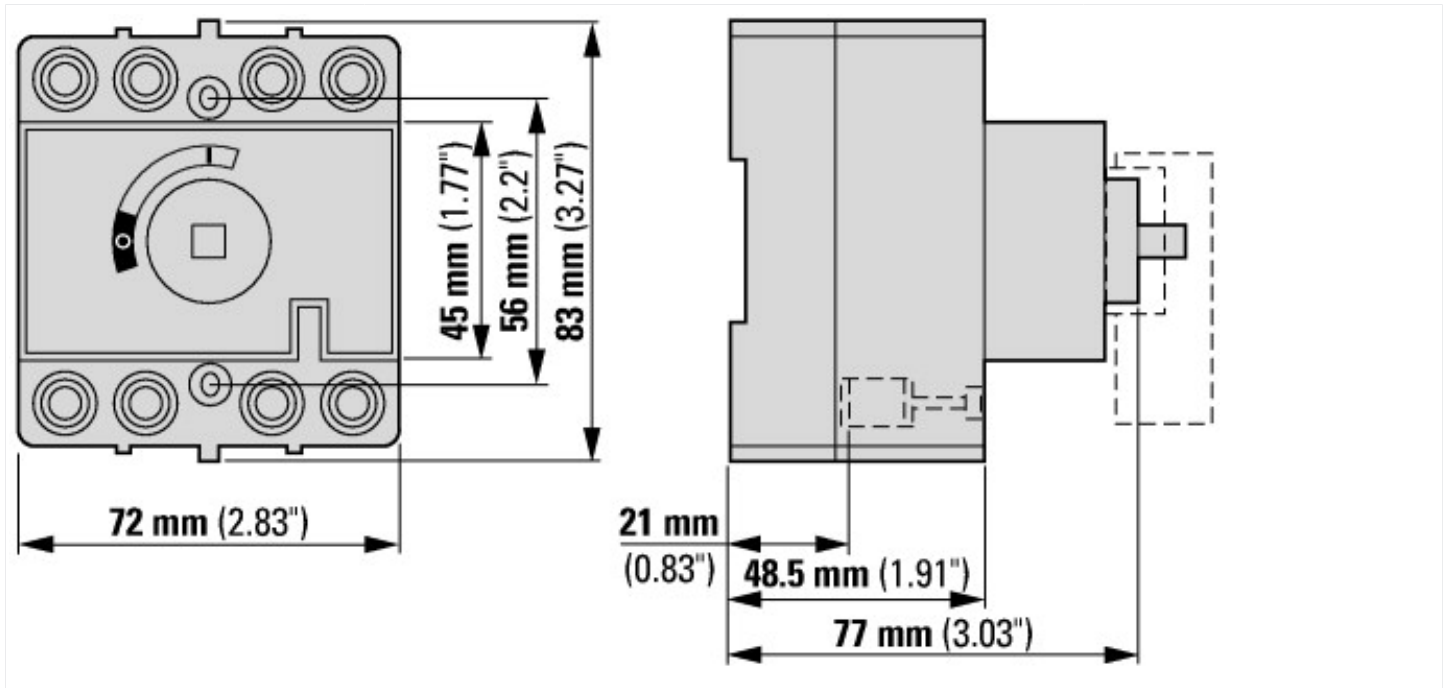

Assets (links)

Declaration of CE Conformity

00003056

Instruction Leaflets

IL008025ZU2018_05

Additional product information (links)

IL008025ZU Switch-disconnector DCM, DMM

IL008025ZU Switch-disconnector DCM, DMM ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL008025ZU2018_12.pdf