
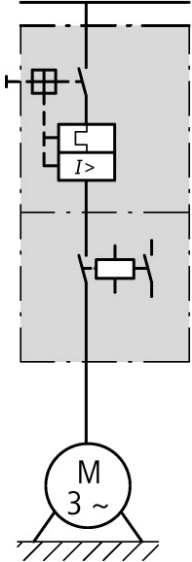




DOL starter,  $I_r = 0.3 - 1.2 \text{ A}$ , 24 V DC, DC Voltage

Part no. **MSC-DE-1,2-M17-SP(24VDC)**  
 Catalog No. **167818**  
 Alternate Catalog No. **XTFCE1P2BCCSTD**

### Delivery program


|                                                                                                                                                                      |       |    |                                                                                      |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------|----|--------------------------------------------------------------------------------------|
| Basic function                                                                                                                                                       |       |    | Type E DOL starters (complete devices)                                               |
| Basic device                                                                                                                                                         |       |    | MSC                                                                                  |
| Components for                                                                                                                                                       |       |    | North America                                                                        |
| Connection to SmartWire-DT                                                                                                                                           |       |    | no                                                                                   |
| <b>Maximum motor rating</b>                                                                                                                                          |       |    |                                                                                      |
| AC HP = PS                                                                                                                                                           |       |    |                                                                                      |
| 460 V 480 V                                                                                                                                                          |       | HP | 0.5                                                                                  |
| <b>Short Circuit Current Rating</b>                                                                                                                                  |       |    |                                                                                      |
| 240 V                                                                                                                                                                |       | kA | 14                                                                                   |
| 480 Y<br>277 V                                                                                                                                                       |       | kA | 14                                                                                   |
| <b>Setting range</b>                                                                                                                                                 |       |    |                                                                                      |
| Setting range of overload releases                                                                                                                                   | $I_r$ | A  | 0.3 - 1.2                                                                            |
|                                                                                   |       |    |                                                                                      |
| Contact sequence                                                                                                                                                     |       |    |  |
| Actuating voltage                                                                                                                                                    |       |    | 24 V DC<br>DC Voltage                                                                |
| <b>Motor-protective circuit-breakers PKE12/XTU-1,2</b>                                                                                                               |       |    |                                                                                      |
| Contactor DILM17-10(...)                                                                                                                                             |       |    |                                                                                      |
| <b>DOL starter wiring set</b><br>Mechanical connection element and electrical electric contact module PKZM0-XDM32                                                    |       |    |                                                                                      |
| Extension terminal BK25/3-PKZ0-E                                                                                                                                     |       |    |                                                                                      |
| <b>Notes</b>                                                                                                                                                         |       |    |                                                                                      |
| The DOL starter type E (complete devices) consists of a PKE motor-protective circuit-breaker with AK-PKZ0, a DILM contactor and an extension terminal BK25/3-PKZ0-E. |       |    |                                                                                      |

Motor-protective circuit-breaker and contactor mounted on top hat rail adapter plate.

The connection of the main circuit between PKE and contactor is established with electrical contact modules.

## Technical data

### General
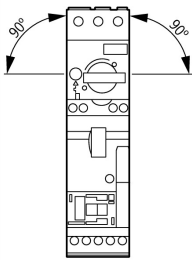
|                     |  |   |                                                                                    |
|---------------------|--|---|------------------------------------------------------------------------------------|
| Standards           |  |   | IEC/EN 60947-4-1, VDE 0660, UL, CSA                                                |
| Mounting position   |  |   |  |
| Altitude            |  | m | Max. 2000                                                                          |
| Ambient temperature |  |   | -25 - +55                                                                          |

### Main conducting paths

|                                       |           |      |                                                                                                                                                                                                                                                  |
|---------------------------------------|-----------|------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Rated impulse withstand voltage       | $U_{imp}$ | V AC | 6000                                                                                                                                                                                                                                             |
| Overvoltage category/pollution degree |           |      | III/3                                                                                                                                                                                                                                            |
| Rated operational voltage             | $U_e$     | V    | 208 - 480                                                                                                                                                                                                                                        |
| Rated operational current             |           |      |                                                                                                                                                                                                                                                  |
| Open, 3-pole: 50 – 60 Hz              |           |      |                                                                                                                                                                                                                                                  |
| 380 V 400 V                           | $I_e$     | A    | 1.2                                                                                                                                                                                                                                              |
| AC-4 cycle operation                  |           |      |                                                                                                                                                                                                                                                  |
| Minimum current flow times            |           | ms   | 500 (Class 5)<br>700 (Class 10)<br>900 (Class 15)<br>1000 (Class 20)                                                                                                                                                                             |
| Minimum cut-out periods               |           | ms   | 500                                                                                                                                                                                                                                              |
| Note                                  |           | ms   | In AC-4 cycle operation, going below the minimum current flow time can cause overheating of the load (motor).<br>For all combinations with an SWD activation, you need not adhere to the minimum current flow times and minimum cut-out periods. |

### Additional technical data

|                                             |  |   |                                                                                                                                          |
|---------------------------------------------|--|---|------------------------------------------------------------------------------------------------------------------------------------------|
| Motor protective circuit breaker PKZM0, PKE |  |   | PKE motor-protective circuit-breaker, see motor-protective circuit-breaker product group<br>DILM contactors, see contactor product group |
| DILM contactors                             |  |   |                                                                                                                                          |
| Current heat loss                           |  |   |                                                                                                                                          |
| Current heat loss at $I_e$ to AC-3/400 V    |  | W | 1.2                                                                                                                                      |

### Power consumption

|             |         |   |      |
|-------------|---------|---|------|
| DC operated | Sealing | W | 0.86 |
|-------------|---------|---|------|

### Rating data for approved types

|                                      |  |      |      |
|--------------------------------------|--|------|------|
| Switching capacity                   |  |      |      |
| Maximum motor rating                 |  |      |      |
| Three-phase                          |  |      |      |
| 460 V<br>480 V                       |  | HP   | 0.5  |
| Auxiliary contacts                   |  |      |      |
| Pilot Duty                           |  |      |      |
| AC operated                          |  |      | A600 |
| DC operated                          |  |      | P300 |
| General Use                          |  |      |      |
| AC                                   |  | V    | 600  |
| AC                                   |  | A    | 15   |
| DC                                   |  | V    | 250  |
| DC                                   |  | A    | 1    |
| Short Circuit Current Rating, type E |  | SCCR |      |
| 240 V                                |  | kA   | 14   |
| 480 Y / 277 V                        |  | kA   | 14   |
| Short Circuit Current Rating         |  | SCCR |      |

|                  |  |    |              |
|------------------|--|----|--------------|
| 600 V High Fault |  |    |              |
| SCCR (fuse)      |  | kA | 100          |
| max. Fuse        |  | A  | 6 Class J/CC |

## Design verification as per IEC/EN 61439

| Technical data for design verification                                                                                 |            |    |                                                                                                                                  |
|------------------------------------------------------------------------------------------------------------------------|------------|----|----------------------------------------------------------------------------------------------------------------------------------|
| Rated operational current for specified heat dissipation                                                               | $I_n$      | A  | 1.2                                                                                                                              |
| Heat dissipation per pole, current-dependent                                                                           | $P_{vid}$  | W  | 0.4                                                                                                                              |
| Equipment heat dissipation, current-dependent                                                                          | $P_{vid}$  | W  | 1.2                                                                                                                              |
| Static heat dissipation, non-current-dependent                                                                         | $P_{vs}$   | W  | 0.86                                                                                                                             |
| Heat dissipation capacity                                                                                              | $P_{diss}$ | W  | 0                                                                                                                                |
| Operating ambient temperature min.                                                                                     |            | °C | -25                                                                                                                              |
| Operating ambient temperature max.                                                                                     |            | °C | 55                                                                                                                               |
| IEC/EN 61439 design verification                                                                                       |            |    |                                                                                                                                  |
| 10.2 Strength of materials and parts                                                                                   |            |    |                                                                                                                                  |
| 10.2.2 Corrosion resistance                                                                                            |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.1 Verification of thermal stability of enclosures                                                               |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat                                             |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.4 Resistance to ultra-violet (UV) radiation                                                                       |            |    | Meets the product standard's requirements.                                                                                       |
| 10.2.5 Lifting                                                                                                         |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.6 Mechanical impact                                                                                               |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.2.7 Inscriptions                                                                                                    |            |    | Meets the product standard's requirements.                                                                                       |
| 10.3 Degree of protection of ASSEMBLIES                                                                                |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.4 Clearances and creepage distances                                                                                 |            |    | Meets the product standard's requirements.                                                                                       |
| 10.5 Protection against electric shock                                                                                 |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.6 Incorporation of switching devices and components                                                                 |            |    | Does not apply, since the entire switchgear needs to be evaluated.                                                               |
| 10.7 Internal electrical circuits and connections                                                                      |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.8 Connections for external conductors                                                                               |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.9 Insulation properties                                                                                             |            |    |                                                                                                                                  |
| 10.9.2 Power-frequency electric strength                                                                               |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.3 Impulse withstand voltage                                                                                       |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.9.4 Testing of enclosures made of insulating material                                                               |            |    | Is the panel builder's responsibility.                                                                                           |
| 10.10 Temperature rise                                                                                                 |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating                                                                                             |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility                                                                                    |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function                                                                                              |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0


| Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)                                                                                                |  |    |                |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----|----------------|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecl@ss10.0.1-27-37-09-05 [AJZ718013]) |  |    |                |
| Kind of motor starter                                                                                                                                                                            |  |    | Direct starter |
| With short-circuit release                                                                                                                                                                       |  |    | Yes            |
| Rated control supply voltage $U_s$ at AC 50HZ                                                                                                                                                    |  | V  | 0 - 0          |
| Rated control supply voltage $U_s$ at AC 60HZ                                                                                                                                                    |  | V  | 0 - 0          |
| Rated control supply voltage $U_s$ at DC                                                                                                                                                         |  | V  | 24 - 24        |
| Voltage type for actuating                                                                                                                                                                       |  |    | DC             |
| Rated operation power at AC-3, 230 V, 3-phase                                                                                                                                                    |  | kW | 0.18           |
| Rated operation power at AC-3, 400 V                                                                                                                                                             |  | kW | 7.5            |
| Rated power, 460 V, 60 Hz, 3-phase                                                                                                                                                               |  | kW | 0.37           |
| Rated power, 575 V, 60 Hz, 3-phase                                                                                                                                                               |  | kW | 0.37           |

|                                                                          |    |                  |
|--------------------------------------------------------------------------|----|------------------|
| Rated operation current I <sub>e</sub>                                   | A  | 12               |
| Rated operation current at AC-3, 400 V                                   | A  | 1.2              |
| Overload release current setting                                         | A  | 0.3 - 1.2        |
| Rated conditional short-circuit current, type 1, 480 Y/277 V             | A  | 0                |
| Rated conditional short-circuit current, type 1, 600 Y/347 V             | A  | 0                |
| Rated conditional short-circuit current, type 2, 230 V                   | A  | 0                |
| Rated conditional short-circuit current, type 2, 400 V                   | A  | 0                |
| Number of auxiliary contacts as normally open contact                    |    | 1                |
| Number of auxiliary contacts as normally closed contact                  |    | 0                |
| Ambient temperature, upper operating limit                               | °C | 60               |
| Temperature compensated overload protection                              |    | Yes              |
| Release class                                                            |    | Adjustable       |
| Type of electrical connection of main circuit                            |    | Screw connection |
| Type of electrical connection for auxiliary- and control current circuit |    | Screw connection |
| Rail mounting possible                                                   |    | Yes              |
| With transformer                                                         |    | No               |
| Number of command positions                                              |    | 0                |
| Suitable for emergency stop                                              |    | No               |
| Coordination class according to IEC 60947-4-3                            |    | Class 2          |
| Number of indicator lights                                               |    | 0                |
| External reset possible                                                  |    | No               |
| With fuse                                                                |    | No               |
| Degree of protection (IP)                                                |    | IP20             |
| Degree of protection (NEMA)                                              |    | Other            |
| Supporting protocol for TCP/IP                                           |    | No               |
| Supporting protocol for PROFIBUS                                         |    | No               |
| Supporting protocol for CAN                                              |    | No               |
| Supporting protocol for INTERBUS                                         |    | No               |
| Supporting protocol for ASI                                              |    | No               |
| Supporting protocol for MODBUS                                           |    | No               |
| Supporting protocol for Data-Highway                                     |    | No               |
| Supporting protocol for DeviceNet                                        |    | No               |
| Supporting protocol for SUCONET                                          |    | No               |
| Supporting protocol for LON                                              |    | No               |
| Supporting protocol for PROFINET IO                                      |    | No               |
| Supporting protocol for PROFINET CBA                                     |    | No               |
| Supporting protocol for SERCOS                                           |    | No               |
| Supporting protocol for Foundation Fieldbus                              |    | No               |
| Supporting protocol for EtherNet/IP                                      |    | No               |
| Supporting protocol for AS-Interface Safety at Work                      |    | No               |
| Supporting protocol for DeviceNet Safety                                 |    | No               |
| Supporting protocol for INTERBUS-Safety                                  |    | No               |
| Supporting protocol for PROFIsafe                                        |    | No               |
| Supporting protocol for SafetyBUS p                                      |    | No               |
| Supporting protocol for other bus systems                                |    | No               |
| Width                                                                    | mm | 45               |
| Height                                                                   | mm | 272              |
| Depth                                                                    | mm | 145              |

## Approvals

|                         |  |                                                             |
|-------------------------|--|-------------------------------------------------------------|
| Product Standards       |  | UL60947-4-1A; CSA-C22.2 No. 14-10; IEC60947-4-1; CE marking |
| UL File No.             |  | E123500                                                     |
| UL Category Control No. |  | NKJH                                                        |
| CSA File No.            |  | 12528                                                       |
| CSA Class No.           |  | 3211-08                                                     |

## Dimensions

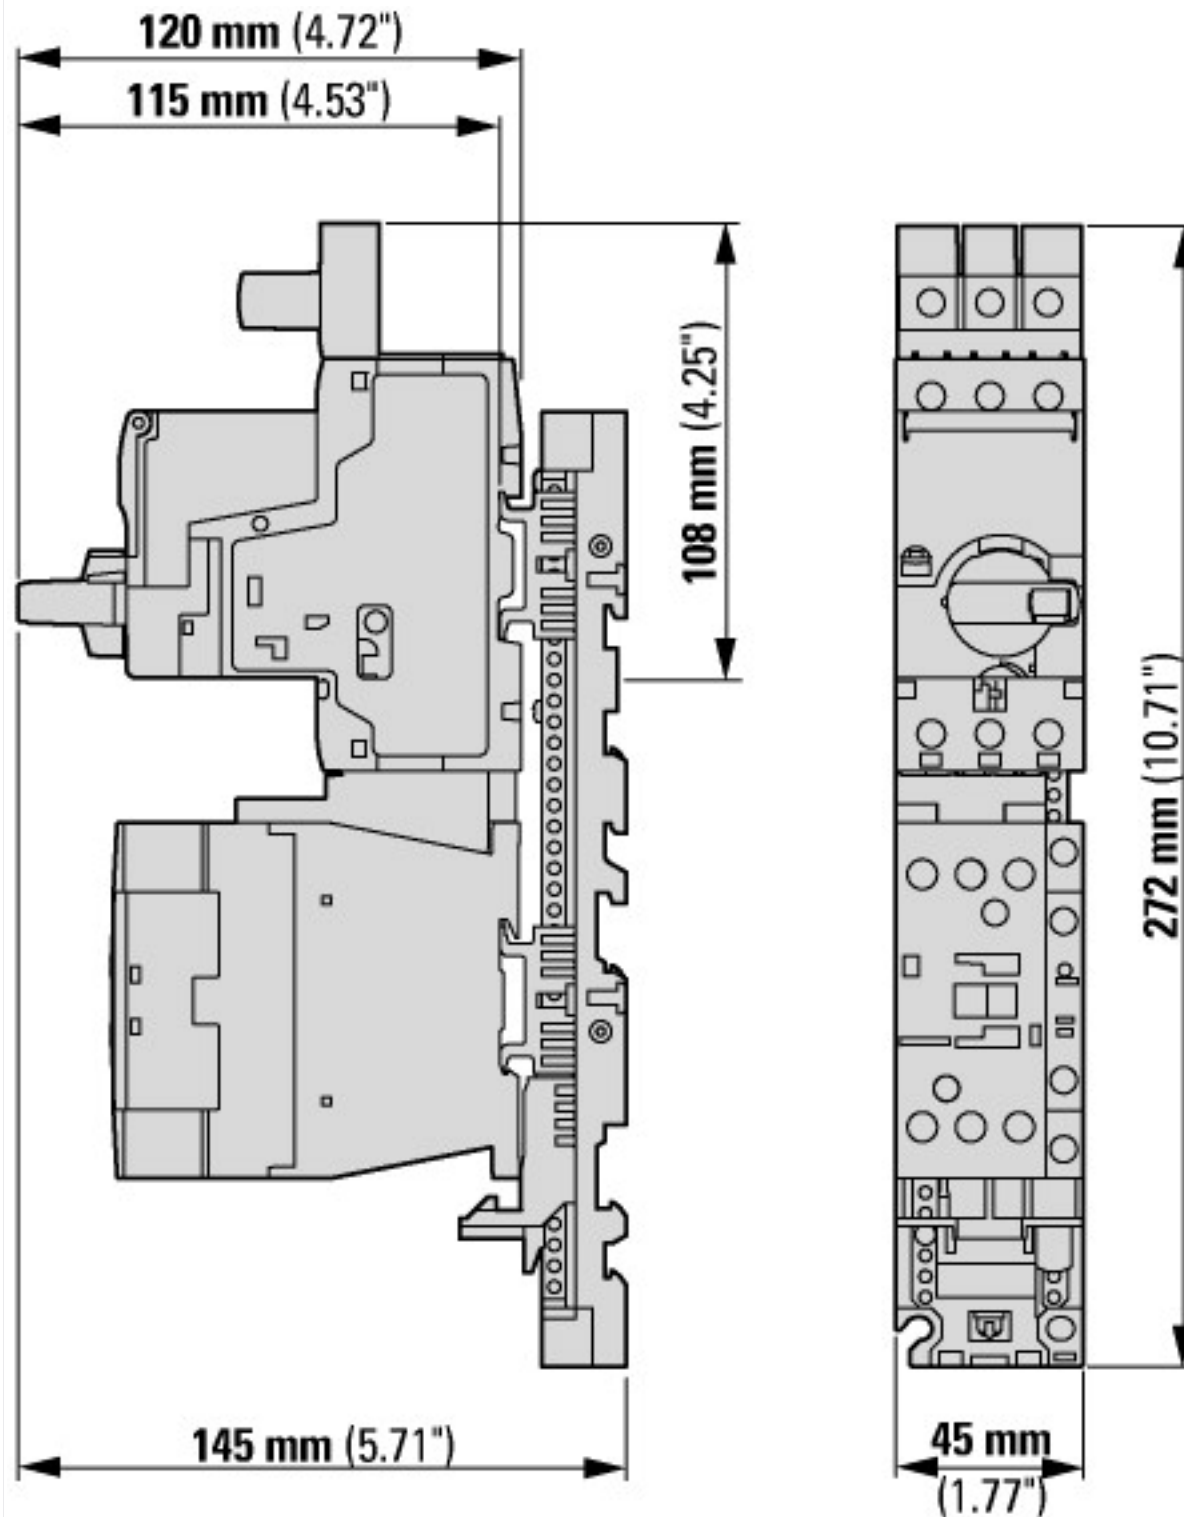

## Assets (links)

### Declaration of CE Conformity

00003119

### Instruction Leaflets

IL03402052Z2018\_03

## Additional product information (links)

**IL03402052Z Motorstarter combination: type E starter/type F starter with PKE**IL03402052Z Motorstarter combination: type E starter/type F starter with PKE [ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03402052Z2018\\_03.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03402052Z2018_03.pdf)

