



## Cassette 2000A, IZMX403 m. control cable connection



**Part no.** IZMX-CAS403-2000-SEC-1  
**Catalog No.** 183944  
**Alternate Catalog No.** 67C2752A51  
**EL-Nummer (Norway)** 4398353

## Delivery program

|                                      |       |   |                                                                           |
|--------------------------------------|-------|---|---------------------------------------------------------------------------|
| Product range                        |       |   | Accessories                                                               |
| Accessories                          |       |   | Withdrawable units                                                        |
| Accessories                          |       |   | Cassettes                                                                 |
|                                      |       |   | Equipment supplied: arcing chamber cover, terminal blocks fully populated |
| Rated current                        | $I_n$ | A | 2000                                                                      |
| Pole                                 |       |   | 3                                                                         |
| For use with                         |       |   | IZMX40...3-...W<br>INX40...3-...W                                         |
| <b>Instructions</b>                  |       |   | With control conductor terminals fully fitted.                            |
| Information about equipment supplied |       |   | with arcing chamber cover                                                 |
|                                      |       |   | Control circuit terminal                                                  |
| Installation type                    |       |   | Withdrawable                                                              |


## Design verification as per IEC/EN 61439

|                                        |  |    |     |
|----------------------------------------|--|----|-----|
| Technical data for design verification |  |    |     |
| Operating ambient temperature min.     |  | °C | -25 |
| Operating ambient temperature max.     |  | °C | 70  |

## Technical data ETIM 7.0

|                                                                                                                                                                                                   |  |   |                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---|-----------------|
| Low-voltage industrial components (EG000017) / Chassis part power circuit breaker (EC002043)                                                                                                      |  |   |                 |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Chassis part circuit breaker (ecl@ss10.0.1-27-37-04-22 [ACN955011]) |  |   |                 |
| Rated current $I_n$                                                                                                                                                                               |  | A | 2000            |
| Number of poles                                                                                                                                                                                   |  |   | 3               |
| Version as busbar adapter                                                                                                                                                                         |  |   | No              |
| Version as built-in device                                                                                                                                                                        |  |   | Yes             |
| Type of electrical connection of main circuit                                                                                                                                                     |  |   | Rail connection |

Dimensions

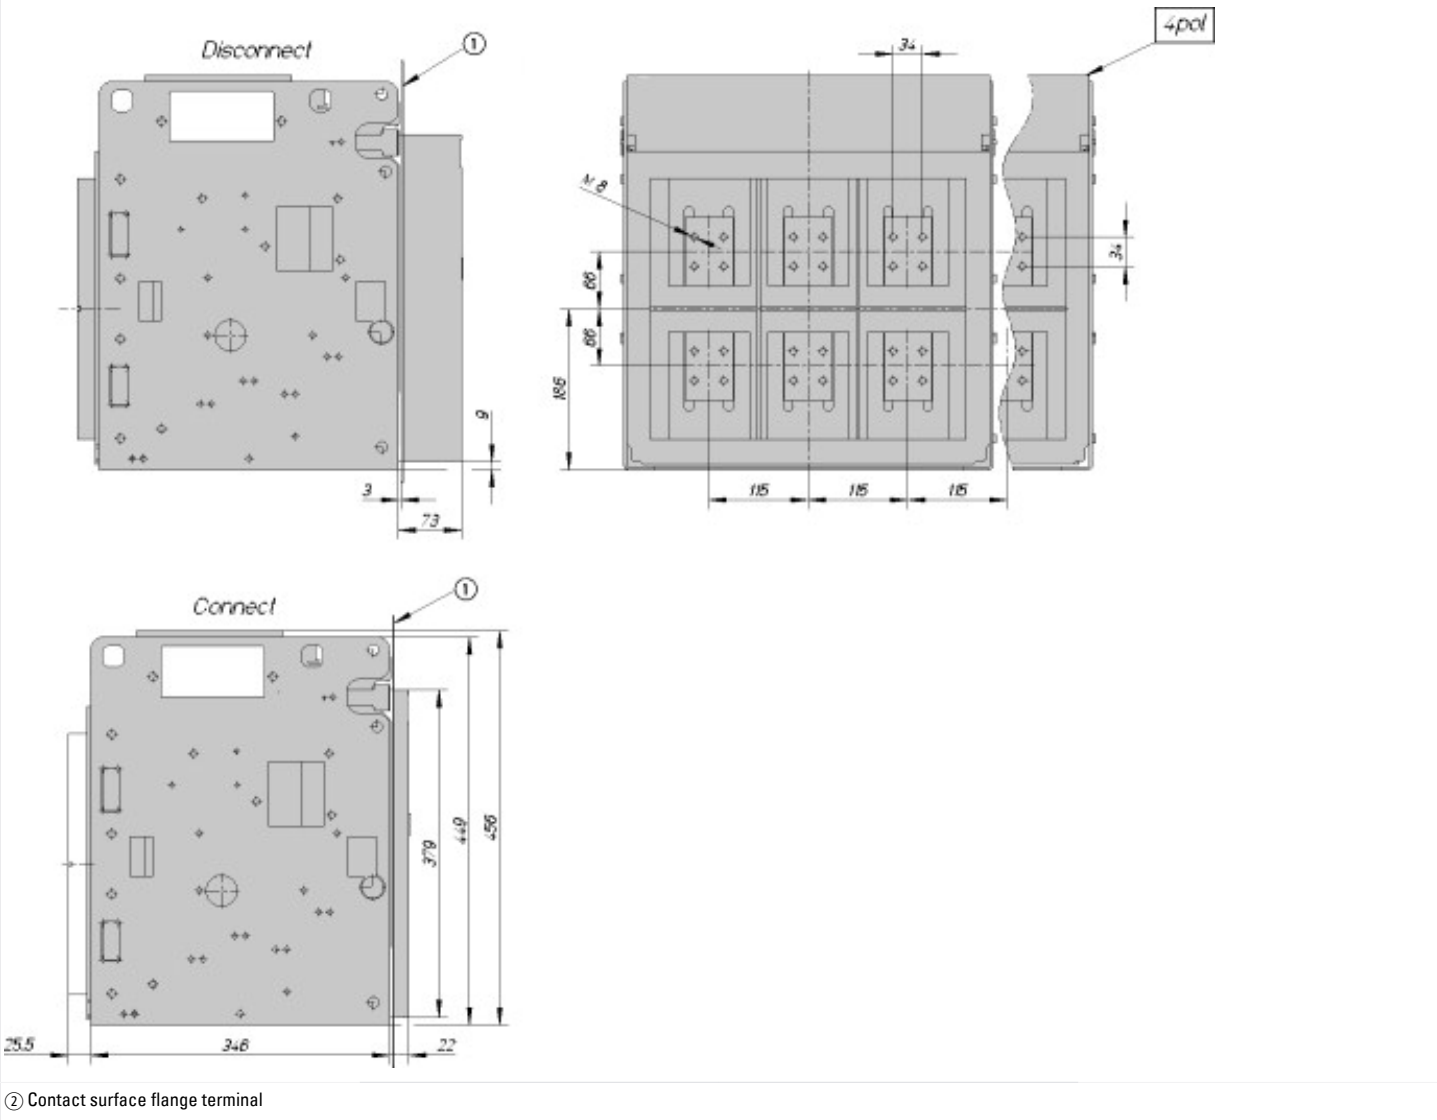

② Contact surface flange terminal