

DATASHEET - M30I-FUSB-30



Bulkhead interface, 0.3 m, Prefabricated cable with permanently connected USB 3.0 Type A plug, Front ring stainless steel



Part no. M30I-FUSB-30
Catalog No. 188130
Alternate Catalog No. M30I-FUSB-30

Delivery program

| | | | |
|---------------------------------------|--|---|--|
| Accessories | | | General accessories |
| Basic function accessories | | | Bulkhead interface, RJ45 socket |
| | | | Prefabricated cable with permanently connected USB 3.0 Type A plug |
| Cable length | | m | 0.3 |
| Degree of Protection | | | IP65 (with closed cover) IP20 (with plug connected) |
| Front ring | | | Front ring stainless steel |
| Connection to SmartWire-DT | | | no |
| For use with | | | Front mounting |
| Terminal diagram / contact assignment | | | |

Technical data

Technical data

| | | | |
|------------------|-------|--|-----------|
| Nominal voltage | U_L | | AC/DC 5V |
| Voltage range | | | Max. 30 V |
| Number of poles | | | 9 |
| Class / category | | | 3.0 |
| Screen earth kit | | | yes |


General

| | | | |
|-----------------------|-----------|----|-------------------------|
| Design | | | USB 3.0 A |
| Insulation resistance | R_{ISO} | MΩ | $> \geq 100$ |
| Mounting depth: | | mm | ca. 70 (incl. Krümmung) |
| Outer cable diameter | | mm | 6.1 |

Technical data ETIM 7.0

| | | | |
|---|--|--|-------|
| Low-voltage industrial components (EG000017) / Accessories for control circuit devices (EC002024) | | | |
| Type of electrical accessory | | | Other |
| Type of mechanical accessory | | | Other |

Characteristics

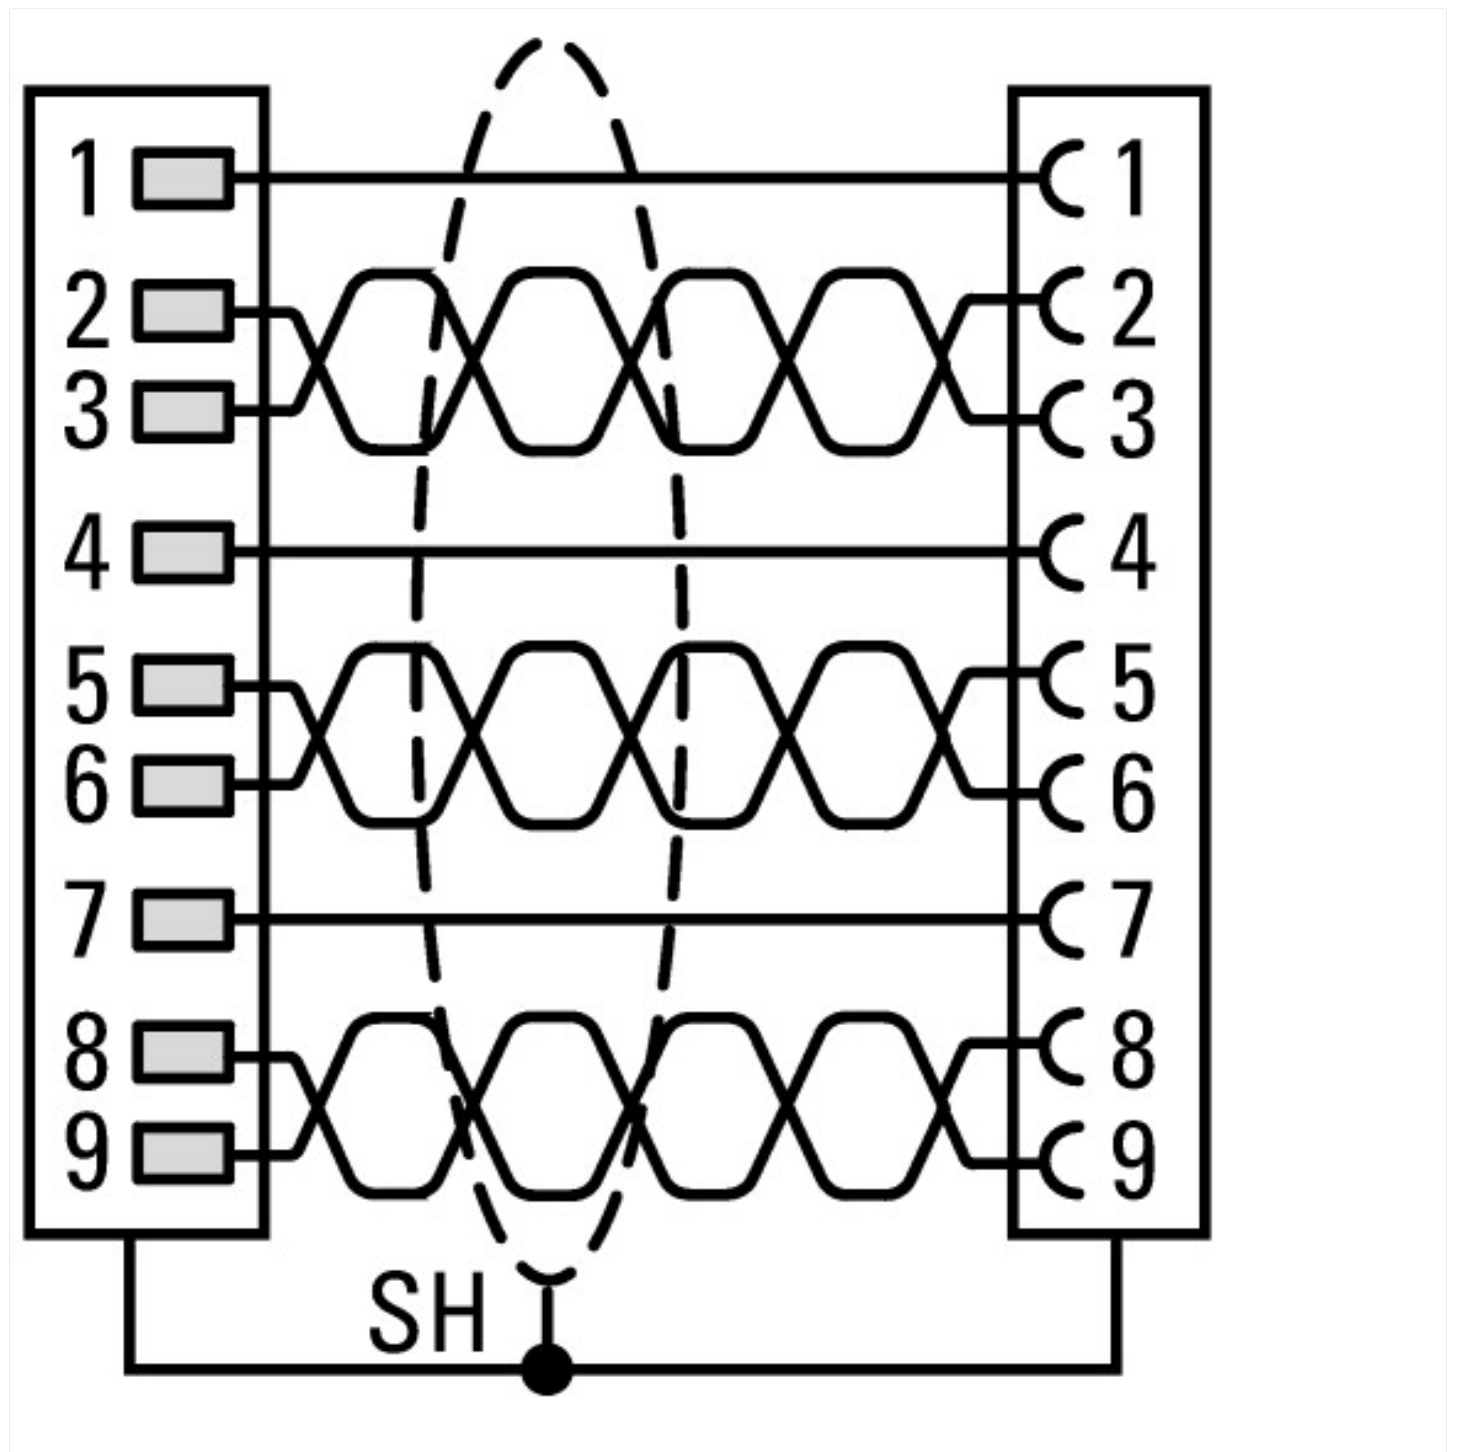

Assets (links)

Declaration of CE Conformity

00003256

Instruction Leaflets

IL047019ZU2018_05

Additional product information (links)

IL047019ZU Flat Front

IL047019ZU Flat Front

ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL047019ZU2018_05.pdf