

# DATASHEET - M30I-FUSB-150



**Bulkhead interface, 1.5 m, Prefabricated cable with permanently connected USB 3.0 Type A plug, Front ring stainless steel**



**Part no.** M30I-FUSB-150  
**Catalog No.** 188132  
**Alternate Catalog No.** M30I-FUSB-150

## Delivery program

Accessories			General accessories
Basic function accessories			Bulkhead interface, RJ45 socket
			Prefabricated cable with permanently connected USB 3.0 Type A plug
Cable length		m	1.5
Degree of Protection			IP65 (with closed cover) IP20 (with plug connected)
Front ring			Front ring stainless steel
Connection to SmartWire-DT			no
For use with			Front mounting
Terminal diagram / contact assignment			

## Technical data

### Technical data

Nominal voltage	$U_L$		AC/DC 5V
Voltage range			Max. 30 V
Number of poles			9
Class / category			3.0
Screen earth kit			yes


### General

Design			USB 3.0 A
Insulation resistance	$R_{ISO}$	MΩ	$> \geq 100$
Mounting depth:		mm	ca. 70 (incl. Krümmung)
Outer cable diameter		mm	6.1

## Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Accessories for control circuit devices (EC002024)			
Type of electrical accessory			Other
Type of mechanical accessory			Other

## Characteristics

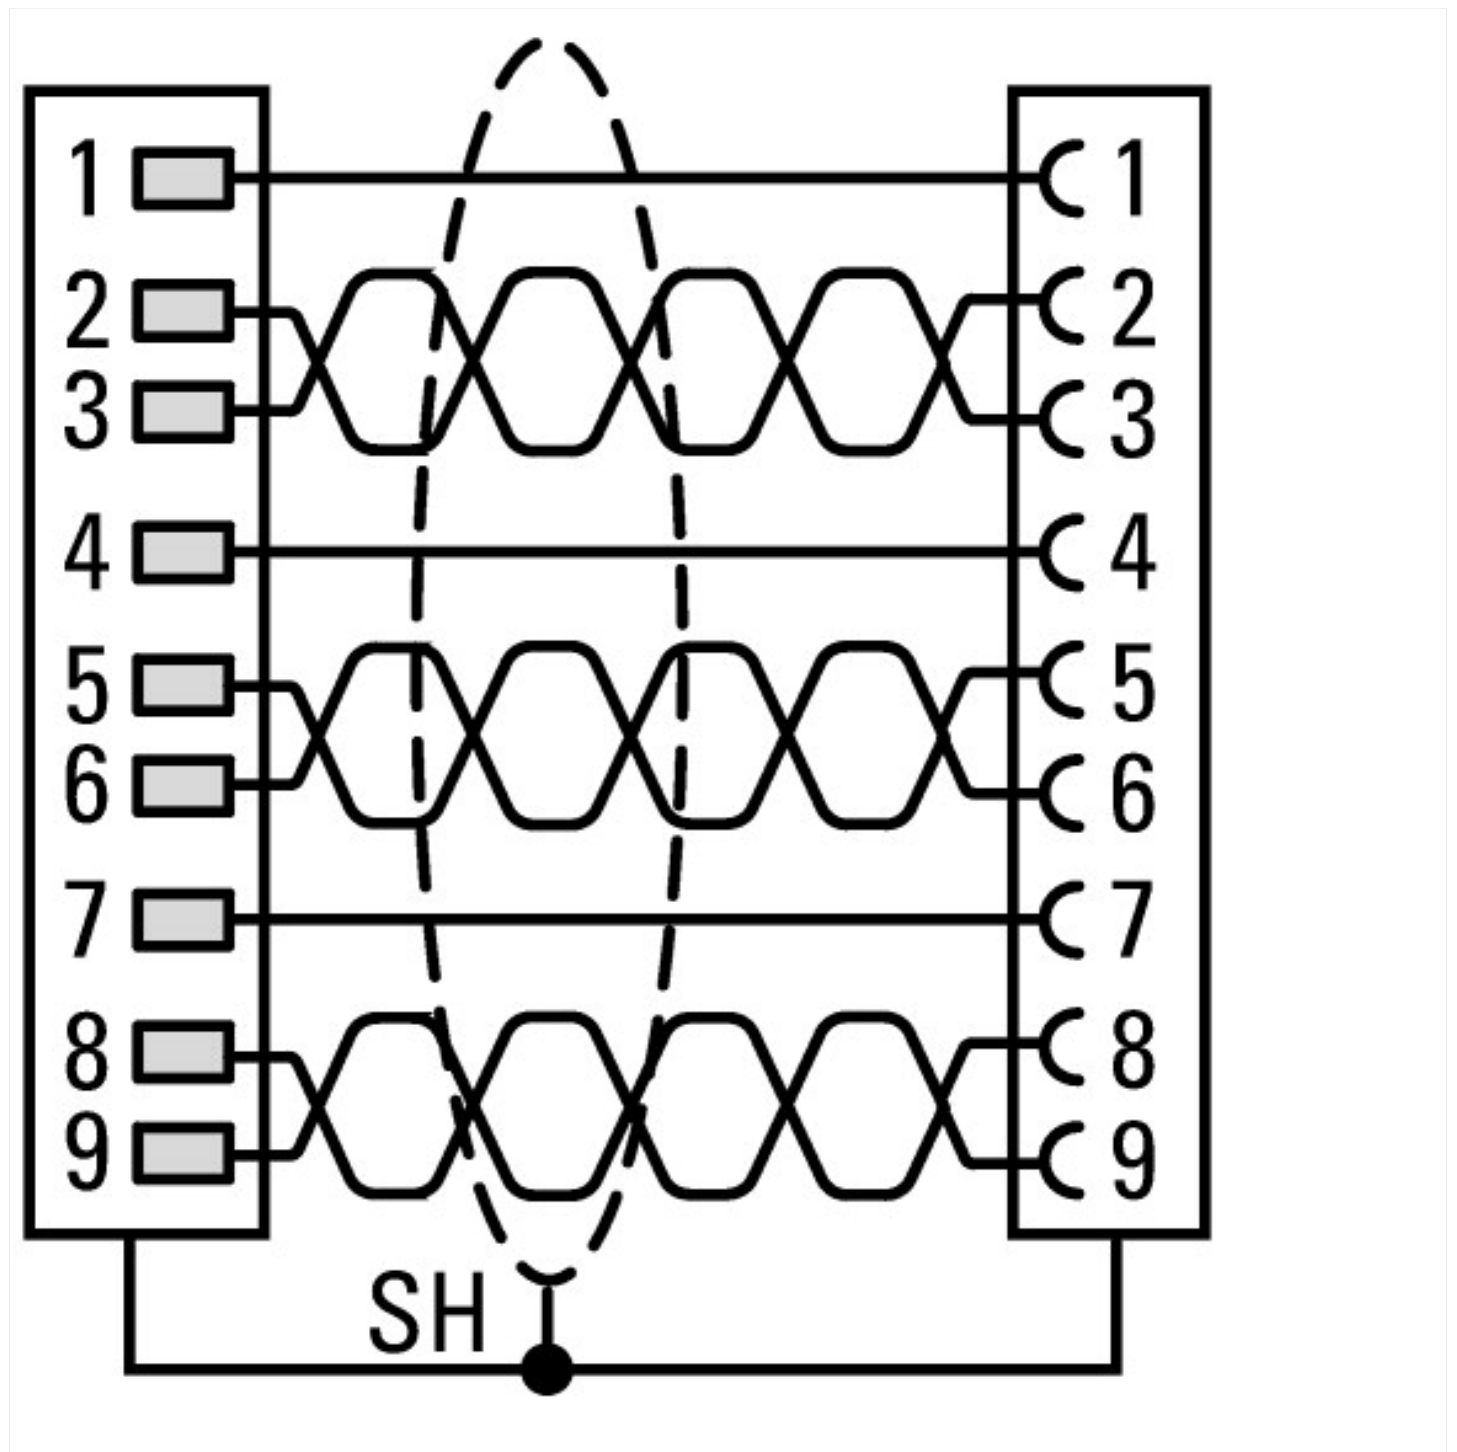

## Assets (links)

### Declaration of CE Conformity

00003256

### Instruction Leaflets

IL047019ZU2018\_05

## Additional product information (links)

IL047019ZU Flat Front

IL047019ZU Flat Front

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL047019ZU2018\\_05.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL047019ZU2018_05.pdf)