





**Contactor, 3 pole, 380 V 400 V 45 kW, 48 V 50 Hz, AC operation, Spring-loaded terminals**


**Part no.** DILMC95(48V50HZ)  
**Catalog No.** 239657  
**Alternate Catalog No.** XTCEC095F00Y

**Delivery program**

|   |                |    |  |  |
|---|----------------|----|--|--|
| Product range   |                |    |  | Contactors   |
| Application   |                |    |  | Contactors for Motors  |
| Subrange  |                |    |  | Contactors up to 170 A, 3 pole   |
| Utilization category                                      |                |    |  | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>NAC-3: Normal AC induction motors: starting, switch off during running<br>AC-4: Normal AC induction motors: starting, plugging, reversing, inching |
| Notes   |                |    |  | <br>Also suitable for motors with efficiency class IE3.<br>IE3-ready devices are identified by the logo on their packaging.              |
| Connection technique                                      |                |    |  | Spring-loaded terminals  |
| Description   |                |    |  | Spring-cage terminals on auxiliary and control circuit terminals   |
| Number of poles   |                |    |  | 3 pole   |
| <b>Rated operational current</b>                          |                |    |  |  |
| AC-3  |                |    |  |  |
| Notes   |                |    |  | At maximum permissible ambient temperature (open.)   |
| 380 V 400 V   | $I_e$          | A  |  | 95   |
| AC-1  |                |    |  |  |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |    |  |  |
| Open  |                |    |  |  |
| at 40 °C  | $I_{th} = I_e$ | A  |  | 130  |
| enclosed  | $I_{th}$       | A  |  | 100  |
| Conventional free air thermal current, 1 pole             |                |    |  |  |
| open  | $I_{th}$       | A  |  | 275  |
| enclosed  | $I_{th}$       | A  |  | 250  |
| <b>Max. rating for three-phase motors, 50 - 60 Hz</b>     |                |    |  |  |
| AC-3  |                |    |  |  |
| 220 V 230 V   | P              | kW |  | 30   |
| 380 V 400 V   | P              | kW |  | 45   |
| 660 V 690 V   | P              | kW |  | 75   |
| AC-4  |                |    |  |  |
| 220 V 230 V   | P              | kW |  | 16   |
| 380 V 400 V   | P              | kW |  | 26   |
| 660 V 690 V   | P              | kW |  | 35   |
| Contact sequence  |                |    |  |    |
| <b>Instructions</b>                                       |                |    |  | Contacts to EN 50 012.<br>Auxiliary current, coil connections with spring-cage connection technology.<br>Main current connections with screw terminals.  |
| Can be combined with auxiliary contact                    |                |    |  | DILM150-XHIC(V)..<br>DILM1000-XHIC..   |
| Actuating voltage   |                |    |  | 48 V 50 Hz   |
| Voltage AC/DC   |                |    |  | AC operation   |
| Connection to SmartWire-DT                                |                |    |  | no   |

## Technical data

### General
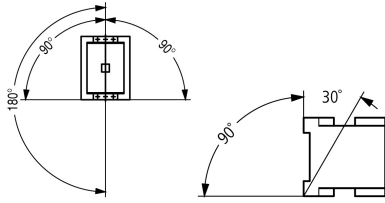
|   |                                     |                 |  |
|---|-------------------------------------|-----------------|--|
| Standards   |                                     |                 | IEC/EN 60947, VDE 0660, UL, CSA  |
| Lifespan, mechanical  |                                     |                 |  |
| AC operated   | Operations                          | $\times 10^6$   | 10   |
| Operating frequency, mechanical                                       |                                     |                 |  |
| AC operated   | Operations/h                        |                 | 3600   |
| Climatic proofing   |                                     |                 | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30     |
| Ambient temperature   |                                     |                 |  |
| Open  |                                     | °C              | -25 - +60  |
| Enclosed  |                                     | °C              | - 25 - 40  |
| Storage   |                                     | °C              | - 40 - 80  |
| Mounting position   |                                     |                 |  |
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |                                     |                 |  |
| Half-sinusoidal shock, 10 ms  |                                     |                 |  |
| Main contacts   |                                     |                 |  |
| N/O contact   |                                     | g               | 10   |
| Auxiliary contacts  |                                     |                 |  |
| N/O contact   |                                     | g               | 7  |
| N/C contact   |                                     | g               | 5  |
| Mechanical shock resistance (IEC/EN 60068-2-27) when tabletop-mounted |                                     |                 |  |
| Half-sinusoidal shock, 10 ms  |                                     |                 |  |
| Main contacts   |                                     |                 |  |
| N/O contact   |                                     | g               | 10   |
| Auxiliary contacts  |                                     |                 |  |
| N/O contact   |                                     | g               | 7  |
| N/C contact   |                                     | g               | 5  |
| Degree of Protection  |                                     |                 | IP00   |
| Protection against direct contact when actuated from front (EN 50274) |                                     |                 | Finger and back-of-hand proof  |
| Altitude  |                                     | m               | Max. 2000  |
| Weight  |                                     |                 |  |
| AC operated   |                                     | kg              | 2.15   |
| Screw connector terminals   |                                     |                 |  |
| Terminal capacity main cable  |                                     |                 |  |
| Flexible with ferrule   |                                     | mm <sup>2</sup> | 1 x (10 - 70)<br>2 x (10 - 50)   |
| Stranded  |                                     | mm <sup>2</sup> | 1 x (16 - 70)<br>2 x (16 - 50)   |
| Solid or stranded   |                                     | AWG             | single 8...3/0, double 8...2/0   |
| Flat conductor  | Lamellenzahl<br>x Breite x<br>Dicke | mm              | 2 x (6 x 16 x 0.8)   |
| Stripping length  |                                     | mm              | 24   |
| Terminal screw  |                                     |                 | M10  |
| Tightening torque   |                                     | Nm              | 14   |
| Tool  |                                     |                 |  |
| Hexagon socket-head spanner   | SW                                  | mm              | 5  |
| Spring-loaded terminal connection                                     |                                     |                 |  |
| Terminal capacity control circuit cables                              |                                     |                 |  |
| Solid   |                                     | mm <sup>2</sup> | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5)   |
| Flexible  |                                     | mm <sup>2</sup> | 1 x (0.75 - 2.5)   |

|                         |  |                 |                                      |
|-------------------------|--|-----------------|--------------------------------------|
|                         |  |                 | 2 x (0.75 - 2.5)                     |
| Flexible with ferrule   |  | mm <sup>2</sup> | 1 x (0.75 - 1.5)<br>2 x (0.75 - 1.5) |
| Solid or stranded       |  | AWG             | 18 - 14                              |
| Stripping length        |  | mm              | 10                                   |
| Tool                    |  |                 |                                      |
| Screwdriver blade width |  | mm              | 3.5                                  |

### Main conducting paths

|  |                |      |       |
|--|----------------|------|-------|
| Rated impulse withstand voltage        | $U_{imp}$      | V AC | 8000  |
| Overvoltage category/pollution degree  |                |      | III/3 |
| Rated insulation voltage               | $U_i$          | V AC | 690   |
| Rated operational voltage              | $U_e$          | V AC | 690   |
| Safe isolation to EN 61140             |                |      |       |
| between coil and contacts              |                | V AC | 690   |
| between the contacts                   |                | V AC | 690   |
| Making capacity (p.f. to IEC/EN 60947) |                |      |       |
|  | $U_p$ to 690 V | A    | 1330  |
| Breaking capacity                      |                |      |       |
| 220 V 230 V                            |                | A    | 950   |
| 380 V 400 V                            |                | A    | 950   |
| 500 V                                  |                | A    | 950   |
| 660 V 690 V                            |                | A    | 800   |
| Short-circuit rating                   |                |      |       |
| Short-circuit protection maximum fuse  |                |      |       |
| Type "2" coordination                  |                |      |       |
| 400 V                                  | gG/gL 500 V    | A    | 160   |
| 690 V                                  | gG/gL 690 V    | A    | 160   |
| Type "1" coordination                  |                |      |       |
| 400 V                                  | gG/gL 500 V    | A    | 250   |
| 690 V                                  | gG/gL 690 V    | A    | 200   |

### AC

|   |                |   |  |
|---|----------------|---|--|
| AC-1  |                |   |  |
| Rated operational current                                 |                |   |  |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |  |
| Open  |                |   |  |
| at 40 °C  | $I_{th} = I_e$ | A | 130  |
| at 50 °C  | $I_{th} = I_e$ | A | 125  |
| at 55 °C  | $I_{th} = I_e$ | A | 115  |
| at 60 °C  | $I_{th} = I_e$ | A | 110  |
| enclosed  | $I_{th}$       | A | 100  |
| Conventional free air thermal current, 1 pole             |                |   |  |
| open  | $I_{th}$       | A | 275  |
| enclosed  | $I_{th}$       | A | 250  |
| AC-3  |                |   |  |
| Rated operational current                                 |                |   |  |
| Open, 3-pole: 50 – 60 Hz                                  |                |   |  |
| Notes   |                |   | At maximum permissible ambient temperature (open.) |
| 220 V 230 V   | $I_e$          | A | 95   |
| 240 V   | $I_e$          | A | 95   |
| 380 V 400 V   | $I_e$          | A | 95   |
| 415 V   | $I_e$          | A | 95   |
| 440V  | $I_e$          | A | 95   |
| 500 V   | $I_e$          | A | 95   |
| 660 V 690 V   | $I_e$          | A | 80   |
| 380 V 400 V   | $I_e$          | A | 95   |

|              |   |     |    |
|--------------|---|-----|----|
| Motor rating | P | kWh |    |
| 220 V 230 V  | P | kW  | 30 |
| 240V         | P | kW  | 32 |
| 380 V 400 V  | P | kW  | 45 |
| 415 V        | P | kW  | 57 |
| 440 V        | P | kW  | 60 |
| 500 V        | P | kW  | 70 |
| 660 V 690 V  | P | kW  | 75 |

#### AC-4

|                          |       |   |    |
|--------------------------|-------|---|----|
| Open, 3-pole: 50 – 60 Hz |       |   |    |
| 220 V 230 V              | $I_e$ | A | 50 |
| 240 V                    | $I_e$ | A | 50 |
| 380 V 400 V              | $I_e$ | A | 50 |
| 415 V                    | $I_e$ | A | 50 |
| 440 V                    | $I_e$ | A | 50 |
| 500 V                    | $I_e$ | A | 50 |
| 660 V 690 V              | $I_e$ | A | 37 |

|              |   |     |    |
|--------------|---|-----|----|
| Motor rating | P | kWh |    |
| 220 V 230 V  | P | kW  | 16 |
| 240 V        | P | kW  | 17 |
| 380 V 400 V  | P | kW  | 26 |
| 415 V        | P | kW  | 30 |
| 440 V        | P | kW  | 32 |
| 500 V        | P | kW  | 36 |
| 660 V 690 V  | P | kW  | 35 |

#### DC

|                                 |       |   |     |
|---------------------------------|-------|---|-----|
| Rated operational current, open |       |   |     |
| DC-1                            |       |   |     |
| 60 V                            | $I_e$ | A | 110 |
| 110 V                           | $I_e$ | A | 110 |
| 220 V                           | $I_e$ | A | 70  |

#### Current heat loss

|  |  |    |      |
|--|--|----|------|
| 3 pole, at $I_{th}$ (60°)                |  | W  | 16.9 |
| Current heat loss at $I_e$ to AC-3/400 V |  | W  | 13.5 |
| Impedance per pole                       |  | mΩ | 0.6  |

#### Magnet systems

|  |          |         |           |
|--|----------|---------|-----------|
| Voltage tolerance  |          |         |           |
| AC operated  | Pick-up  | $x U_c$ | 0.8 - 1.1 |
| Drop-out voltage AC operated   | Drop-out | $x U_c$ | 0.3 - 0.6 |
| Power consumption of the coil in a cold state and $1.0 \times U_S$                         |          |         |           |
| 50 Hz  | Pick-up  | VA      | 310       |
| 50 Hz  | Sealing  | VA      | 26        |
| 50 Hz  | Sealing  | W       | 5.8       |
| 60 Hz  | Pick-up  | VA      | 345       |
| 60 Hz  | Sealing  | VA      | 30        |
| 60 Hz  | Sealing  | W       | 5.8       |
| Duty factor  |          | % DF    | 100       |
| Changeover time at 100 % $U_S$ (recommended value)   |          |         |           |
| Main contacts  |          |         |           |
| AC operated  |          |         |           |
| Closing delay  |          | ms      | 14 - 20   |
| Opening delay  |          | ms      | 9 - 14    |
| Arcing time  |          | ms      | 15        |
| Permissible residual current with actuation of A1 - A2 by the electronics (with 0 signal). |          | mA      | $\leq 1$  |

## Electromagnetic compatibility (EMC)

|                       |  |  |               |
|-----------------------|--|--|---------------|
| Emitted interference  |  |  | to EN 60947-1 |
| Interference immunity |  |  | to EN 60947-1 |

## Rating data for approved types

|   |  |      |                 |
|---|--|------|-----------------|
| Switching capacity  |  |      |                 |
| Maximum motor rating                                      |  |      |                 |
| Three-phase   |  |      |                 |
| 200 V<br>208 V  |  | HP   | 30              |
| 230 V<br>240 V  |  | HP   | 40              |
| 460 V<br>480 V  |  | HP   | 75              |
| 575 V<br>600 V  |  | HP   | 100             |
| Single-phase  |  |      |                 |
| 115 V<br>120 V  |  | HP   | 7.5             |
| 230 V<br>240 V  |  | HP   | 15              |
| General use   |  | A    | 125             |
| Short Circuit Current Rating                              |  | SCCR |                 |
| Basic Rating  |  |      |                 |
| SCCR  |  | kA   | 10              |
| max. Fuse   |  | A    | 600             |
| max. CB   |  | A    | 600             |
| 480 V High Fault  |  |      |                 |
| SCCR (fuse)   |  | kA   | 30/100          |
| max. Fuse   |  | A    | 300/300 Class J |
| SCCR (CB)   |  | kA   | 65              |
| max. CB   |  | A    | 250             |
| 600 V High Fault  |  |      |                 |
| SCCR (fuse)   |  | kA   | 30/100          |
| max. Fuse   |  | A    | 300/300 Class J |
| SCCR (CB)   |  | kA   | 30              |
| max. CB   |  | A    | 350             |
| Special Purpose Ratings                                   |  |      |                 |
| Electrical Discharge Lamps (Ballast)                      |  |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        |  | A    | 100             |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        |  | A    | 100             |
| Incandescent Lamps (Tungsten)                             |  |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        |  | A    | 100             |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        |  | A    | 100             |
| Resistance Air Heating                                    |  |      |                 |
| 480V 60Hz 3phase, 277V 60Hz 1phase                        |  | A    | 100             |
| 600V 60Hz 3phase, 347V 60Hz 1phase                        |  | A    | 100             |
| Refrigeration Control (CSA only)                          |  |      |                 |
| LRA 480V 60Hz 3phase                                      |  | A    | 540             |
| FLA 480V 60Hz 3phase                                      |  | A    | 90              |
| LRA 600V 60Hz 3phase                                      |  | A    | 420             |
| FLA 600V 60Hz 3phase                                      |  | A    | 70              |
| Definite Purpose Ratings (100,000 cycles acc. to UL 1995) |  |      |                 |
| LRA 480V 60Hz 3phase                                      |  | A    | 570             |
| FLA 480V 60Hz 3phase                                      |  | A    | 95              |
| Elevator Control  |  |      |                 |
| 200V 60Hz 3phase  |  | HP   | 20              |
| 200V 60Hz 3phase  |  | A    | 62.1            |
| 240V 60Hz 3phase  |  | HP   | 30              |

|                  |    |    |
|------------------|----|----|
| 240V 60Hz 3phase | A  | 80 |
| 480V 60Hz 3phase | HP | 60 |
| 480V 60Hz 3phase | A  | 77 |
| 600V 60Hz 3phase | HP | 75 |
| 600V 60Hz 3phase | A  | 77 |

## Design verification as per IEC/EN 61439

| Technical data for design verification   |            |    |  |
|--|------------|----|--|
| Rated operational current for specified heat dissipation   | $I_n$      | A  | 95   |
| Heat dissipation per pole, current-dependent   | $P_{vid}$  | W  | 4.2  |
| Equipment heat dissipation, current-dependent  | $P_{vid}$  | W  | 12.6   |
| Static heat dissipation, non-current-dependent   | $P_{vs}$   | W  | 5.8  |
| Heat dissipation capacity  | $P_{diss}$ | W  | 0  |
| Operating ambient temperature min.   |            | °C | -25  |
| Operating ambient temperature max.   |            | °C | 60   |
| IEC/EN 61439 design verification   |            |    |  |
| 10.2 Strength of materials and parts   |            |    |  |
| 10.2.2 Corrosion resistance  |            |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |            |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |            |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |            |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |            |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |            |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |            |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |            |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |            |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |            |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |            |    |  |
| 10.9.2 Power-frequency electric strength   |            |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |            |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |            |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |            |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |            |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |            |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0

| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)   |    |  |         |
|---|----|--|---------|
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |    |  |         |
| Rated control supply voltage $U_s$ at AC 50HZ   | V  |  | 48 - 48 |
| Rated control supply voltage $U_s$ at AC 60HZ   | V  |  | 0 - 0   |
| Rated control supply voltage $U_s$ at DC  | V  |  | 0 - 0   |
| Voltage type for actuating  |    |  | AC      |
| Rated operation current $I_e$ at AC-1, 400 V  | A  |  | 130     |
| Rated operation current $I_e$ at AC-3, 400 V  | A  |  | 95      |
| Rated operation power at AC-3, 400 V  | kW |  | 45      |
| Rated operation current $I_e$ at AC-4, 400 V  | A  |  | 50      |
| Rated operation power at AC-4, 400 V  | kW |  | 26      |

|   |  |    |                  |
|---|--|----|------------------|
| Rated operation power NEMA                              |  | kW | 55               |
| Modular version   |  |    | No               |
| Number of auxiliary contacts as normally open contact   |  |    | 0                |
| Number of auxiliary contacts as normally closed contact |  |    | 0                |
| Type of electrical connection of main circuit           |  |    | Screw connection |
| Number of normally closed contacts as main contact      |  |    | 0                |
| Number of main contacts as normally open contact        |  |    | 3                |

## Approvals

|                                      |  |  |  |
|--------------------------------------|--|--|--|
| Product Standards                    |  |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.                          |  |  | E29096   |
| UL Category Control No.              |  |  | NLDX   |
| CSA File No.                         |  |  | 012528   |
| CSA Class No.                        |  |  | 2411-03, 3211-04   |
| North America Certification          |  |  | UL listed, CSA certified   |
| Specially designed for North America |  |  | No   |



- 1: Overload relay
- 2: Suppressor
- 3: Auxiliary contact modules






on the side: 2 x DILM820-XHI11(V)-SI; 2 x DILM820-XHI11-SA



Squirrel-cage motor  
 Operating characteristics  
 Starting: from rest  
 Stopping: after attaining full running speed  
 Electrical characteristics  
 Make: up to 6 x rated motor current  
 Break: up to 1 x rated motor current  
 Utilization category  
 100 % AC-3  
 Typical applications

- Compressors
- Lifts
- Mixers
- Pumps
- Escalators
- Agitators
- Fans
- Conveyor belts
- Centrifuges
- Hinged flaps
- Bucket-elevators
- Air conditioning system
- General drives in manufacturing and processing machines

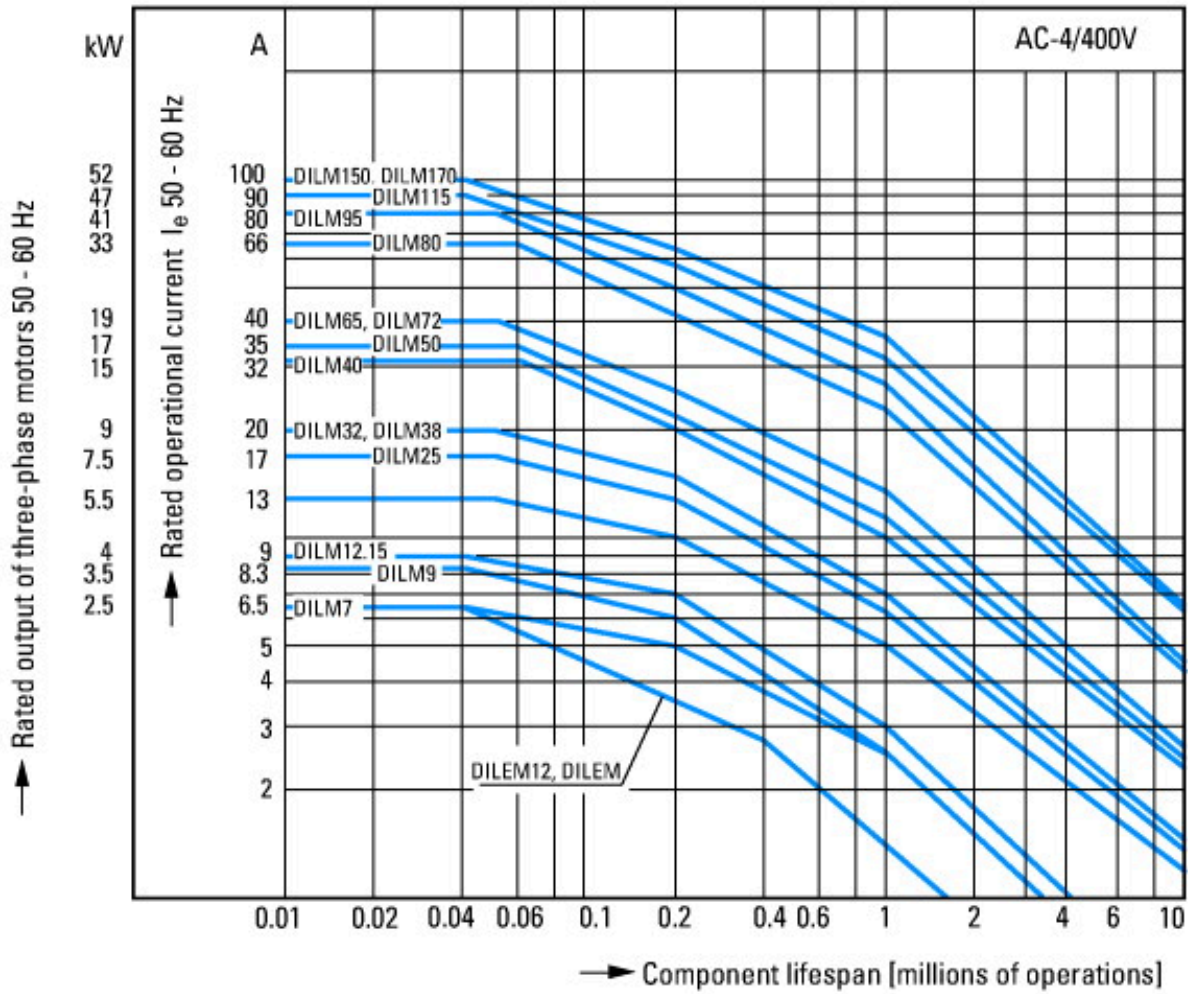


- Extreme switching duty
- Squirrel-cage motor
- Operating characteristics
- Inching, plugging, reversing
- Electrical characteristics
- Make: up to 6 x rated motor current
- Break: up to 6 x rated motor current
- Utilization category
- 100 % AC-4
- Typical applications
- Printing presses
- Wire-drawing machines
- Centrifuges
- Special drives for manufacturing and processing machines



Switching conditions for non-motor consumers, 3 pole, 4 pole  
 Operating characteristics  
 Non inductive and slightly inductive loads  
 Electrical characteristics  
 Switch on: 1 x rated operational current  
 Switch off: 1 x rated operational current  
 Utilization category  
 100 % AC-1  
 Typical examples of application  
 Electric heat

## Dimensions

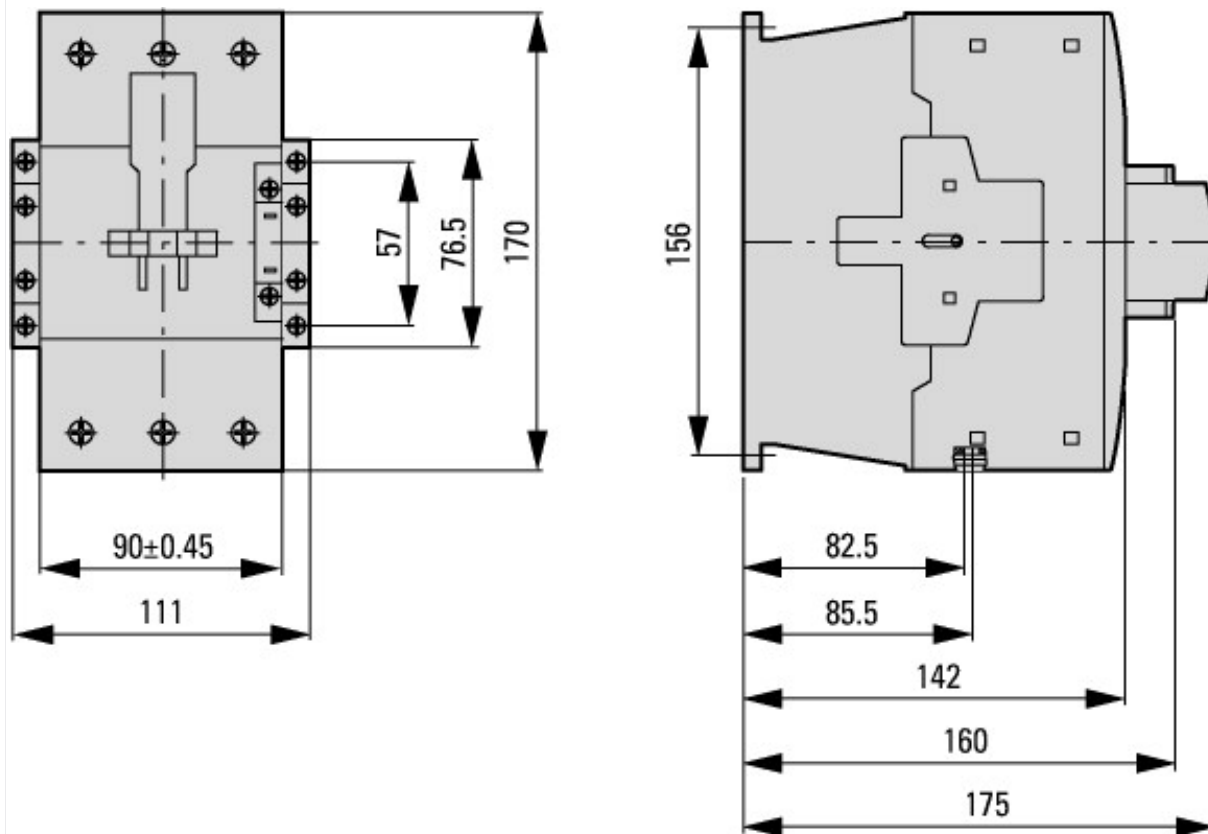

Contacteur with auxiliary contact module



DILM80...DILM170  
 DILMC80...DILMC150  
 DILMF80...DILMF150

## Assets (links)

### Declaration of CE Conformity

00003251

### Instruction Leaflets

IL03407039Z2019\_09

## Additional product information (links)

### IL03407039Z (AWA2100-2286) Contactors

IL03407039Z (AWA2100-2286) Contactors

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL03407039Z2019\\_09.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407039Z2019_09.pdf)

Motor starters and "Special Purpose Ratings" for the North American market

[http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct\\_3258146.pdf](http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf)

|  |   |
|--|---|
| Switchgear of Power Factor Correction Systems  | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a> |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a> |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions   | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a> |
| Effect of the Cabel Capacitance of Long Control Cables on the Actuation of Contactors          | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a> |
| Switchgear for Luminaires  | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a> |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs  | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |