



**Miniature circuit breaker (MCB), 0.5 A, 3p, characteristic: D**



**Part no.** FAZ-D0,5/3-RT  
**Catalog No.** 102297  
**Alternate Catalog No.** FAZ-D0.5/3-RT  
**EL-Nummer (Norway)** 1691873

Similar to illustration

**Delivery program**

Basic function			Miniature circuit-breakers
Number of poles			3 pole
Tripping characteristic			D
Application			Switchgear for industrial and advanced commercial applications
Rated current	$I_n$	A	0.5
Rated switching capacity acc. to IEC/EN 60947-2	$I_{cu}$	kA	15
Product range			FAZ-RT

**Technical data**

**Electrical**

Standards			UL 489, CSA C22.2 No. 5 IEC 60947-2
Rated operational voltage	$U_e$	V	
	$U_e$	V AC	277/480 Y
		V DC	60
Rated voltage according to IEC/EN 60947-2	$U_n$	V AC	415
Rated voltage according to UL	$U_n$	V AC	480Y/277
Rated switching capacity acc. to IEC/EN 60947-2	$I_{cu}$	kA	15
Characteristic			B, C, D
Selectivity Class			3
lifespan			
Lifespan	Operations		> 20000
Direction of incoming supply			as required

**Mechanical**

Standard front dimension		mm	45
Enclosure height		mm	105
Mounting width per pole		mm	17.7
Mounting			IEC/EN 60715 top-hat rail
Degree of Protection			IP20, IP40 (when fitted)
Terminals top and bottom			Twin-purpose terminals
Terminal protection			Finger and back-of-hand proof to BGV A2
Tightening torque of fixing screws		N/m	max. 2.4 UL: #18-12 AWG: 2.4 Nm (21 lb-in) #10-8 AWG: 2.8 Nm (25 lb-in) #6 AWG: 4 Nm (36 lb-in)
Mounting position			As required

**Design verification as per IEC/EN 61439**

Technical data for design verification			
Rated operational current for specified heat dissipation	$I_n$	A	0.5
Heat dissipation per pole, current-dependent	$P_{vid}$	W	0
Equipment heat dissipation, current-dependent	$P_{vid}$	W	3.5
Static heat dissipation, non-current-dependent	$P_{vs}$	W	0
Heat dissipation capacity	$P_{diss}$	W	0

Operating ambient temperature min.	°C	-25
Operating ambient temperature max.	°C	75
linear, per +1 °C, results in a 0.5% reduction of current carrying capacity		

## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)


Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB)  
(ecl@ss10.0.1-27-14-19-01 [AAB905014])

Release characteristic		D
Number of poles (total)		3
Number of protected poles		3
Rated current	A	0.5
Rated voltage	V	415
Rated insulation voltage Ui	V	440
Rated impulse withstand voltage Uimp	kV	4
Rated short-circuit breaking capacity Icn EN 60898 at 230 V	kA	0
Rated short-circuit breaking capacity Icn EN 60898 at 400 V	kA	0
Rated short-circuit breaking capacity Icu IEC 60947-2 at 230 V	kA	15
Rated short-circuit breaking capacity Icu IEC 60947-2 at 400 V	kA	15
Voltage type		AC
Frequency	Hz	50 - 60
Current limiting class		3
Suitable for flush-mounted installation		No
Concurrently switching N-neutral		No
Over voltage category		3
Pollution degree		2
Additional equipment possible		Yes
Width in number of modular spacings		3
Built-in depth	mm	70.5
Degree of protection (IP)		IP20
Ambient temperature during operating	°C	-25 - 75
Connectable conductor cross section multi-wired	mm <sup>2</sup>	1 - 25
Connectable conductor cross section solid-core	mm <sup>2</sup>	1 - 25


## Approvals

Product Standards		IEC/EN 60947-2; EN 45545-2; IEC 61373; UL 489; CSA-C22.2 No. 5-09; CE marking
UL File No.		E235139
UL Category Control No.		DIV0
CSA File No.		204453
CSA Class No.		1432-01
North America Certification		UL listed, CSA certified
Specially designed for North America		Yes, suitable as BCPD
Suitable for		Feeder circuits, branch circuits
Current Limiting Circuit-Breaker		Yes
Max. Voltage Rating		≤ 32 A
Degree of Protection		IEC: IP20, UL/CSA Type: -

## Characteristics

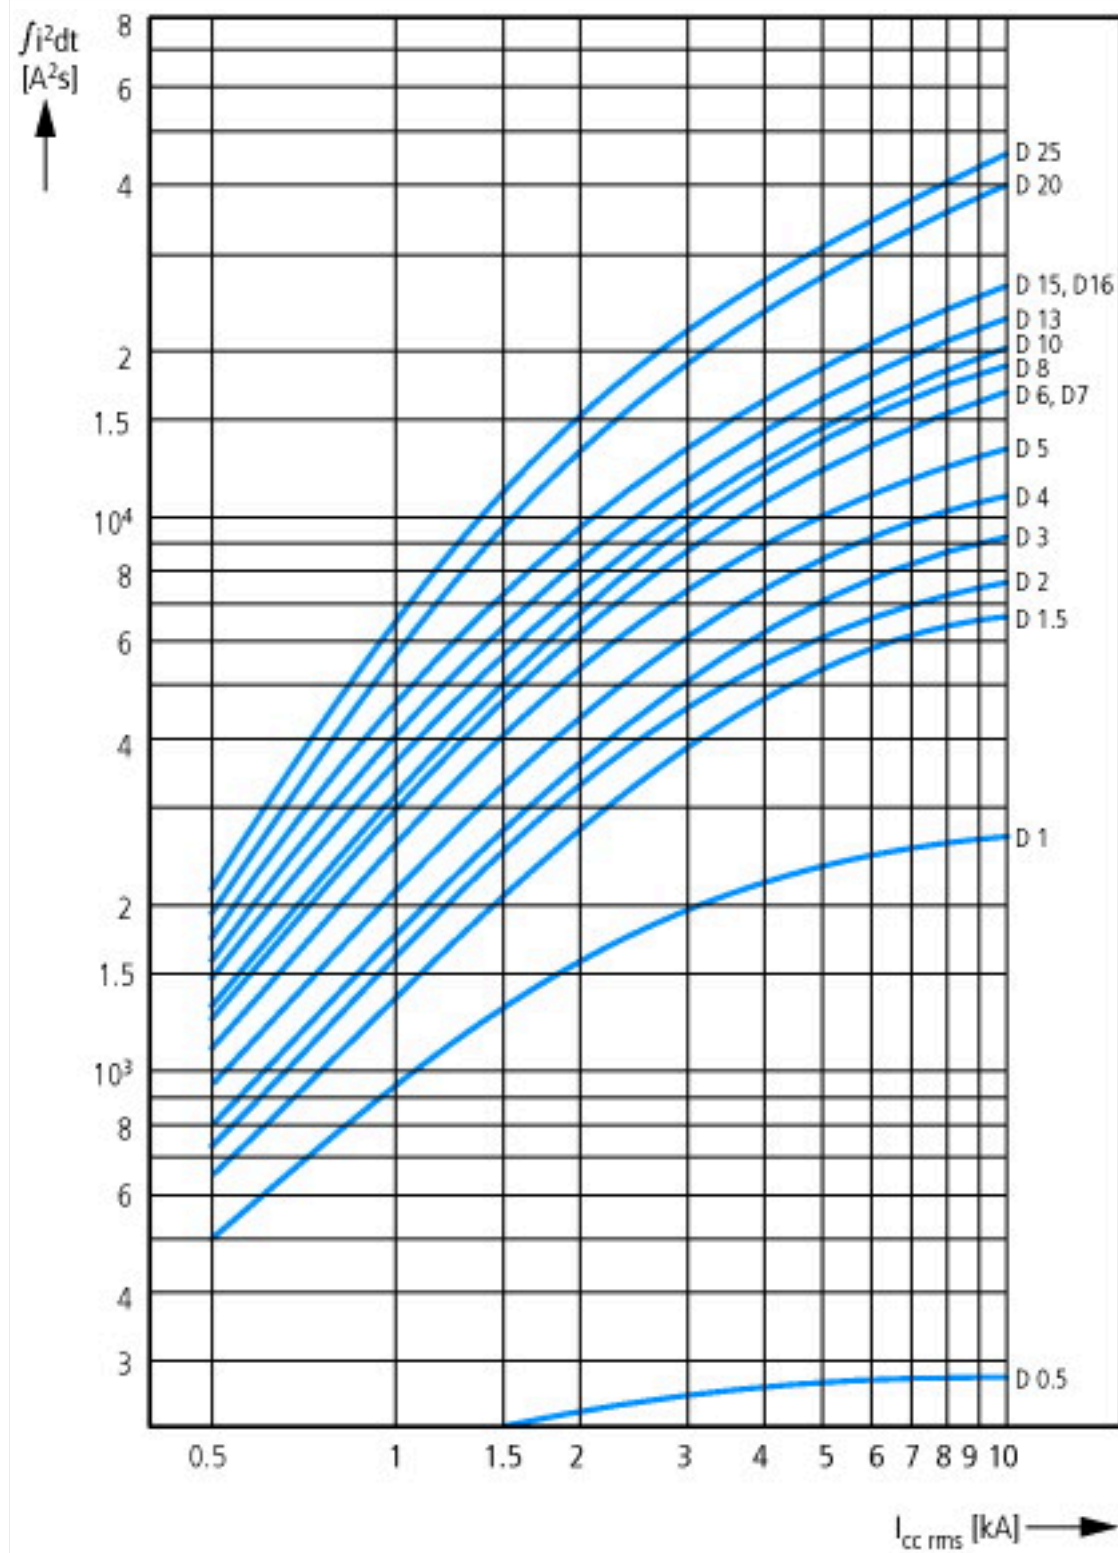

Let-through energy  $\int i^2 dt$   
 Characteristic D (0.5 - 20 A), 277 V

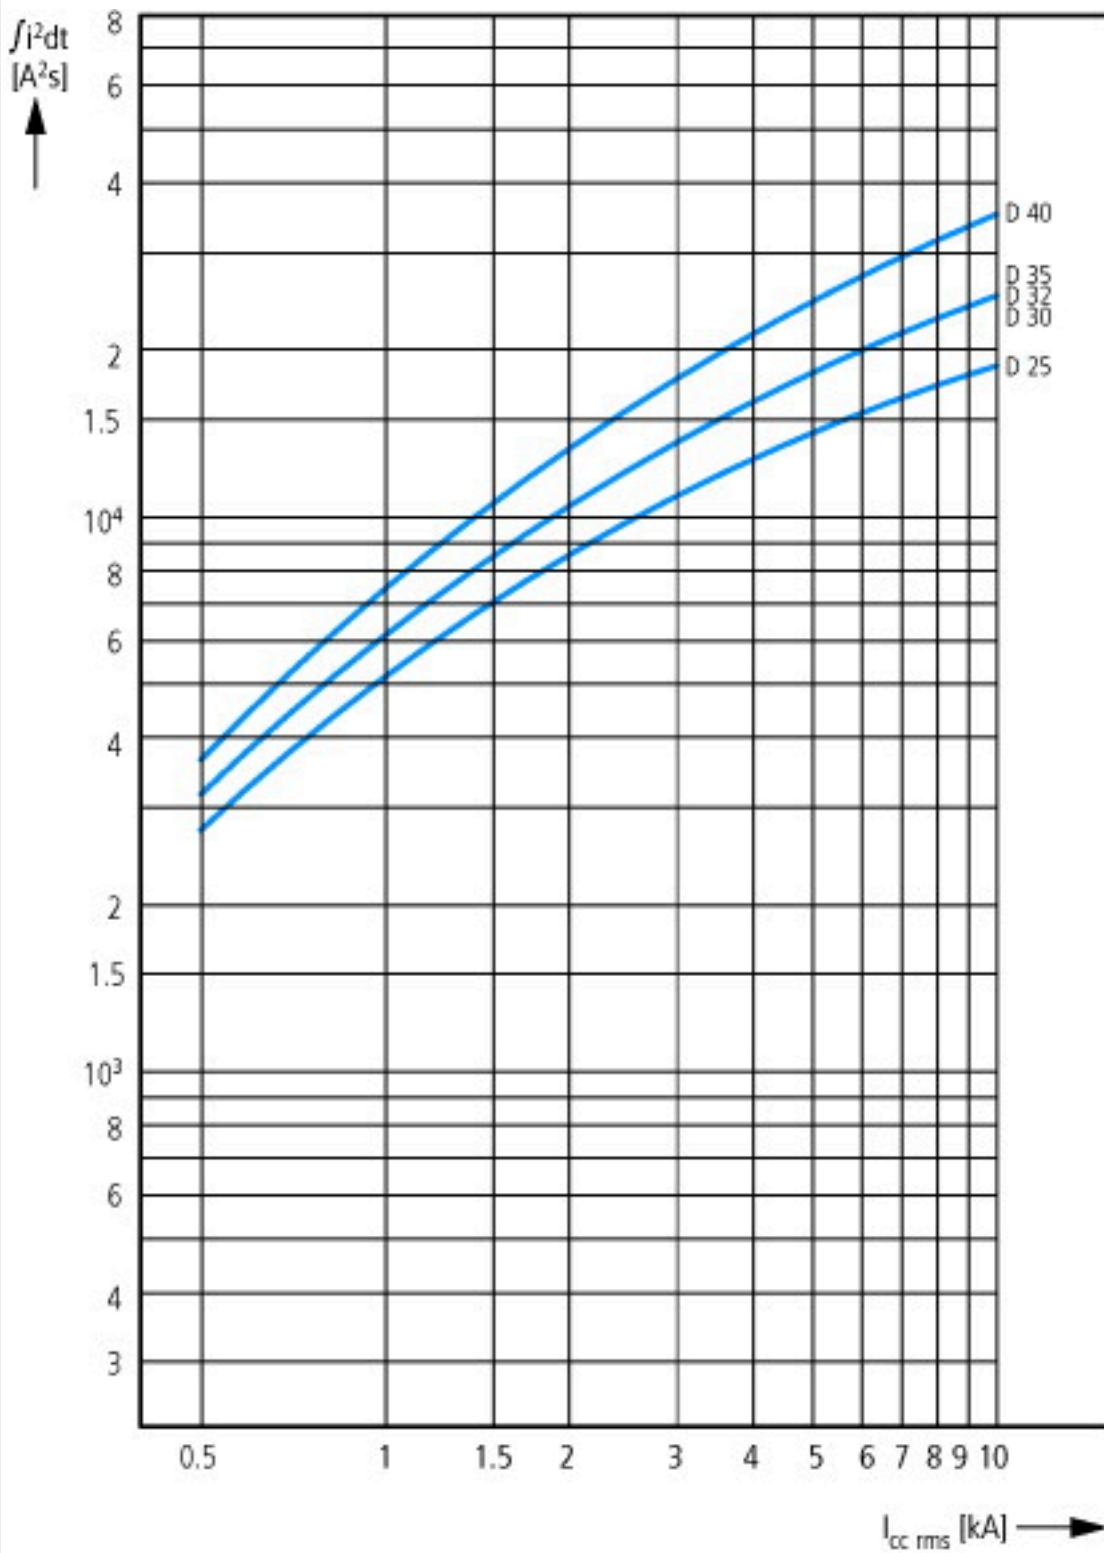

Characteristic D (25 - 40 A), 240 V

### Additional product information (links)

Temperature dependency, derating

<https://www.eaton.com/content/dam/eaton/technicaldocumentation/technical-data-tables/Derating table FAZ-NA-RT.pdf>