




**DOL starter, 24 V DC, 1,5 - 7 (AC-53a), 9 (AC-51) A, Push in terminals, SmartWire-DT slave, Controlled stop**

**Part no.** EMS-DOS-T-9-SWD  
**Catalog No.** 170111  
**Alternate Catalog No.** EMS-DOS-T-9-SWD



## Delivery program

			This item is only available for a limited time. Replacement item: Art. no. 192389, Type: EMS2-DOS-T-9-SWD
Product range			Electronic motor starter
Product range			SmartWire-DT slave
Subrange			SmartWire-DT electronic motor starters
Basic function			DOL starters (complete devices)
Function			For connecting to SmartWire-DT for expanded diagnostics.
Description			DOL starting Motor protection Circuit design: safety output stage with bypass, three-phase disconnect. Controlled stop via additional enable signal terminal up to SIL3/Plc.
Messages			Operational readiness Operating direction feedback Enable signal Motor current in % Motor current in A Thermal motor image in % Overload prewarning Trip indications (overload, phase failure, etc.) Set short-circuit release value Device Type
Commands			Operating the motor starter Manual reset Automatic reset
<b>Motor ratings</b>			
Max. rating for three-phase motors, 50 - 60 Hz			
AC-53a			
380 V 400 V 415 V	P	kW	0.55 - 3
Setting range of overload releases	I <sub>r</sub>	A <sub>x</sub>	1,5 - 7 (AC-53a) 9 (AC-51)
			
Actuating voltage			24 V DC
Connection technique			Push in terminals
Stop Function			Controlled stop
Connection to SmartWire-DT			yes

## Technical data

<b>General</b>			
Standards			IEC/EN 60947-4-2
Dimensions			
Width		mm	30
Height		mm	157
Depth		mm	124
Weight		kg	0.3
Mounting			Top-hat rail IEC/EN 60715, 35 mm
Protection type (IEC/EN 60529, EN50178, VBG 4)			IP20
Mounting position			Vertical
Lifespan, electrical	Operations		3 x 10 <sup>7</sup>

Max. switching frequency		Operation	3/200 (pulse pause time 50:50)
Terminal capacity		h	
Solid		mm <sup>2</sup>	1 x (0.2 - 2.5) 1 x AWG20 - 14
flexible, with ferrule		mm <sup>2</sup>	2 x (0.2 - 2.5) 1 x AWG24 - 14
Notes			Minimum length 10 mm.
flexible, with twin ferrule		mm <sup>2</sup>	2 x (0.2 - 1.5) 2 x AWG24 - 16
Notes			Minimum length 10 mm.

Climatic environmental conditions

Operating ambient temperature		°C	-5 - +60, in accordance with IEC 60068-2-1
Storage	θ	°C	-40 - +80

Main conducting paths

Rated impulse withstand voltage	U <sub>imp</sub>	V AC	6000
Overvoltage category/pollution degree			III/2
Rated operational voltage	U <sub>e</sub>	V	42 - 550
Rated operational current			
AC-51	I <sub>e</sub>	A	1.20 - 9
AC-53a	I <sub>e</sub>	A	1.20 - 7
Heat dissipation	P <sub>V</sub>	W	1 - 12
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	1
Basic insulation to IEC/EN60947-1			
between feedback signal output and switch voltage		V AC	500
Current measurement			
Setting range of overload releases	I <sub>r</sub>	A_x	1,5 - 7 (AC-53a) 9 (AC-51)
Release class		CLASS	10 (I <sub>r</sub> ≤ 4 A) 10A (I <sub>r</sub> > 4 A)
Recovery time	t <sub>W</sub>	min.	2 (manual startup) 20 (automatic restart)
Balance monitoring			
Magnitude I <sub>max</sub> > I <sub>rated</sub> ((I <sub>max</sub> - I <sub>min</sub> )/I <sub>max</sub> )		%	If ≥ 33, pick-up time of 120 s If ≥ 67, pick-up time of 1.8 s
Magnitude I <sub>max</sub> < I <sub>rated</sub> ((I <sub>max</sub> - I <sub>min</sub> )/I <sub>rated</sub> )		%	If ≥ 33, pick-up time of 120 s If ≥ 67, pick-up time of 1.8 s
Stall protection			
Pick-up time I (L1) or I (L3)		A	60
Pick-up time		S	0.5
Short-circuit rating			
Type “1” coordination			
Short-circuit protective device			50 kA, 500 V AC: Fuse 16 A gG/gL 50 kA, 500 V AC: fuse 30 A CCMR 50 kA, 415 V AC: PKM0-4 15 kA, 415 V AC: PKM0-6,3 2.5 kA, 400 V AC: FAZ-B16/3

Control section

Input data			
Supply voltage	U <sub>AUX</sub>	V DC	24 (-15 - +20 %)
Residual ripple on the input voltage		%	≤ 5
Input current		mA	70
Note on input current			If the +, EN+ / -, EN- inputs are linked
Current draw inrush		mA	120
Current draw (operation)	U <sub>AUX</sub>	mA	50

Electromagnetic compatibility (EMC)

Electrostatic discharge (ESD)			
applied standard			IEC/EN 61000-4-2, Level 3
Air discharge		kV	8
Contact discharge		kV	6
Electromagnetic fields (RFI)			

applied standard			IEC/EN 61000-4-3
		V/m	800 - 1000 MHz: 10 1.4 - 2 GHz: 10 2.0 - 2.7 GHz: 3
Radio interference suppression			EN 55011, Class A (emitted interference, line-conducted) EN 61000-6-3, Class A (emitted interference, radiated)
Note on use			This product is designed for operation in industrial environments (environment 2). The use in residential environments (environment 1) could cause electrical interference so that addition suppression must be planned.
Burst		kV	2 IEC/EN 61000-4-4, level 3
power pulses (Surge)			1 kV (symmetrical) 2 kV (asymmetrical) according to IEC/EN 61000-4-5
Immunity to line-conducted interference to (IEC/EN 61000-4-6)		V	10

#### Technical safety parameters:

Notes			Safe switch off. motor protection
Ambient temperature		°C	40
Values according to EN ISO 13849-1			
Performance level	PL		e
Category			3 (Sicheres Abschalten) / 2 (Motorschutz)
Values according to IEC 62061			
			λsd [FIT]: 0 λsu [FIT]: 1321 (Sicheres Abschalten) / 1061 (Motorschutz) λdd [FIT]: 685 (Sicheres Abschalten) / 577 (Motorschutz) λdu [FIT]: 0,1 (Sicheres Abschalten) / 18 (Motorschutz) SFF [%]: 99 (Sicheres Abschalten) / 98 (Motorschutz) DC [%]: 99 (Sicheres Abschalten) / 96 (Motorschutz)
Notes			Safe switch off. motor protection

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	A	6.5
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	2.1
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	6.3
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	1
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-5
Operating ambient temperature max.		°C	60
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Meets the product standard's requirements.
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.

10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function			The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0


Low-voltage industrial components (EG000017) / Motor starter/Motor starter combination (EC001037)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Load breakout, motor breakout / Motor starter combination (ecI@ss10.0.1-27-37-09-05 [AJZ718013])			
Kind of motor starter			Direct starter
With short-circuit release			No
Rated control supply voltage Us at AC 50HZ		V	0 - 0
Rated control supply voltage Us at AC 60HZ		V	0 - 0
Rated control supply voltage Us at DC		V	24 - 24
Voltage type for actuating			DC
Rated operation power at AC-3, 230 V, 3-phase		kW	1.5
Rated operation power at AC-3, 400 V		kW	3
Rated power, 460 V, 60 Hz, 3-phase		kW	2.2
Rated power, 575 V, 60 Hz, 3-phase		kW	0
Rated operation current Ie		A	9
Rated operation current at AC-3, 400 V		A	7
Overload release current setting		A	1.5 - 9
Rated conditional short-circuit current, type 1, 480 Y/277 V		A	0
Rated conditional short-circuit current, type 1, 600 Y/347 V		A	0
Rated conditional short-circuit current, type 2, 230 V		A	0
Rated conditional short-circuit current, type 2, 400 V		A	0
Number of auxiliary contacts as normally open contact			0
Number of auxiliary contacts as normally closed contact			0
Ambient temperature, upper operating limit		°C	40
Temperature compensated overload protection			Yes
Release class			CLASS 10
Type of electrical connection of main circuit			Spring clamp connection
Type of electrical connection for auxiliary- and control current circuit			Spring clamp connection
Rail mounting possible			Yes
With transformer			No
Number of command positions			0
Suitable for emergency stop			Yes
Coordination class according to IEC 60947-4-3			Class 1
Number of indicator lights			4
External reset possible			Yes
With fuse			No
Degree of protection (IP)			IP20
Degree of protection (NEMA)			Other
Supporting protocol for TCP/IP			No
Supporting protocol for PROFIBUS			No
Supporting protocol for CAN			No
Supporting protocol for INTERBUS			No
Supporting protocol for ASI			No
Supporting protocol for MODBUS			No
Supporting protocol for Data-Highway			No
Supporting protocol for DeviceNet			No
Supporting protocol for SUCONET			No
Supporting protocol for LON			No


Supporting protocol for PROFINET IO			No
Supporting protocol for PROFINET CBA			No
Supporting protocol for SERCOS			No
Supporting protocol for Foundation Fieldbus			No
Supporting protocol for EtherNet/IP			No
Supporting protocol for AS-Interface Safety at Work			No
Supporting protocol for DeviceNet Safety			No
Supporting protocol for INTERBUS-Safety			No
Supporting protocol for PROFIsafe			No
Supporting protocol for SafetyBUS p			No
Supporting protocol for other bus systems			Yes
Width		mm	30
Height		mm	157
Depth		mm	139

## Approvals


Product Standards			IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14; CE marking
UL File No.			E29096
UL Category Control No.			NLDX, NLDX7
CSA File No.			UL report applies to both US and Canada
North America Certification			UL listed, certified by UL for use in Canada
Specially designed for North America			No

## Characteristics

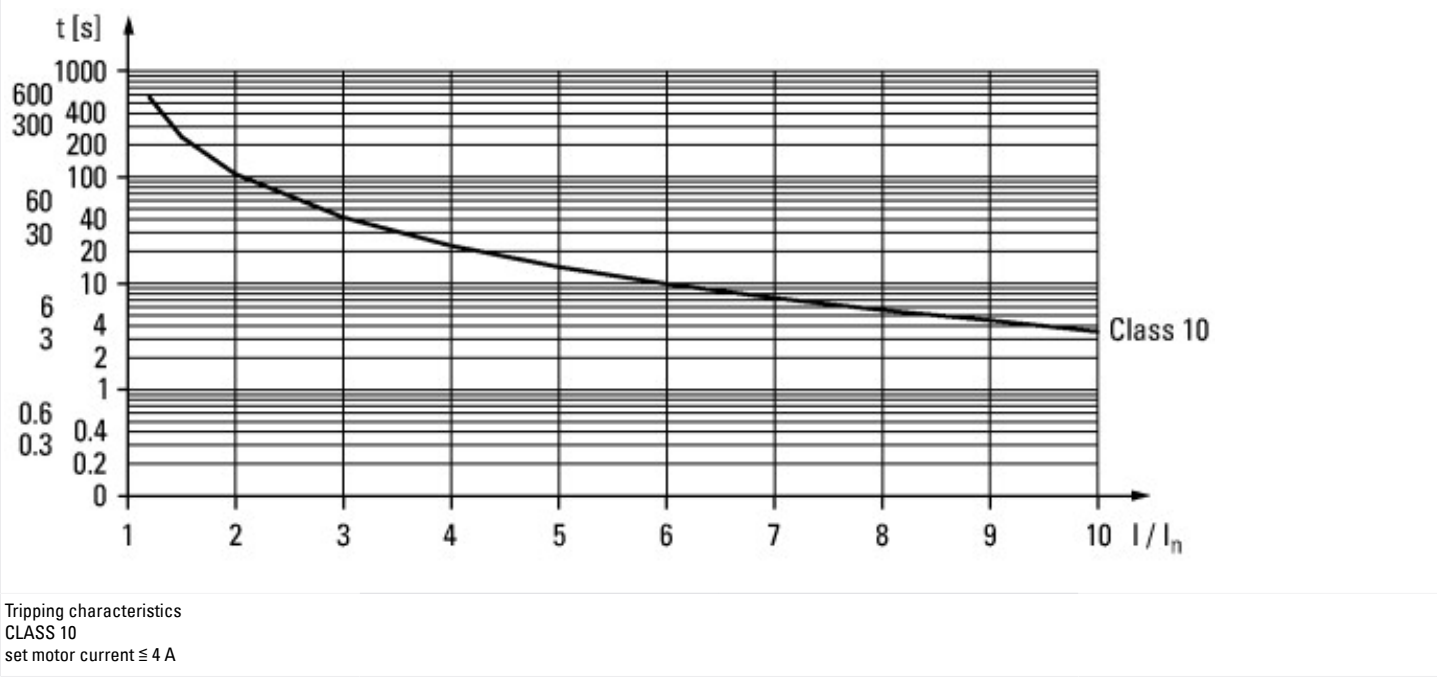

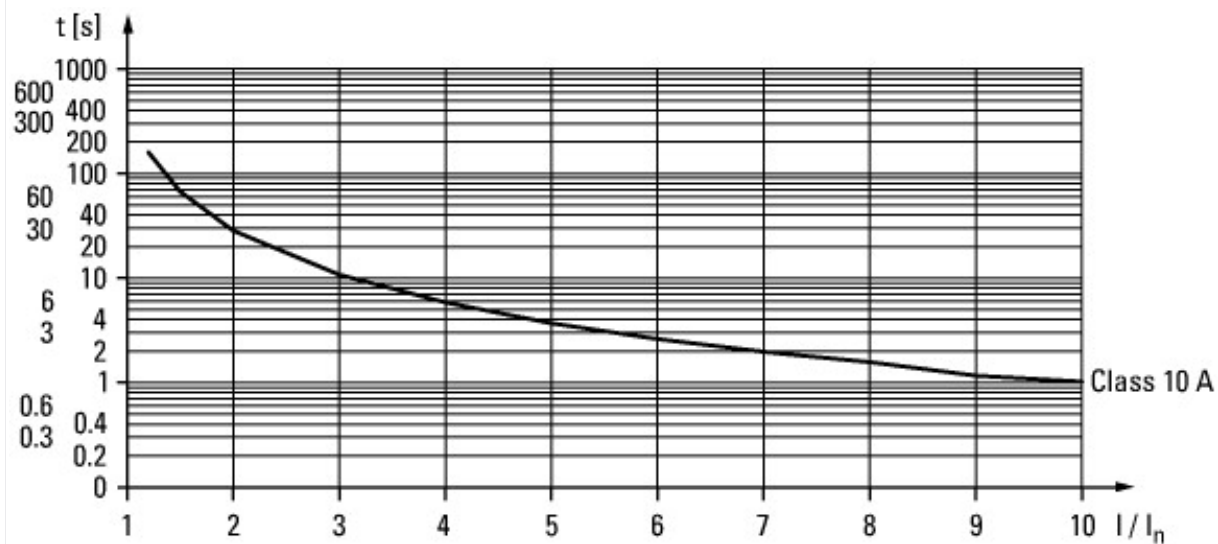


Tripping characteristics  
CLASS 10A  
set motor current > 4 A

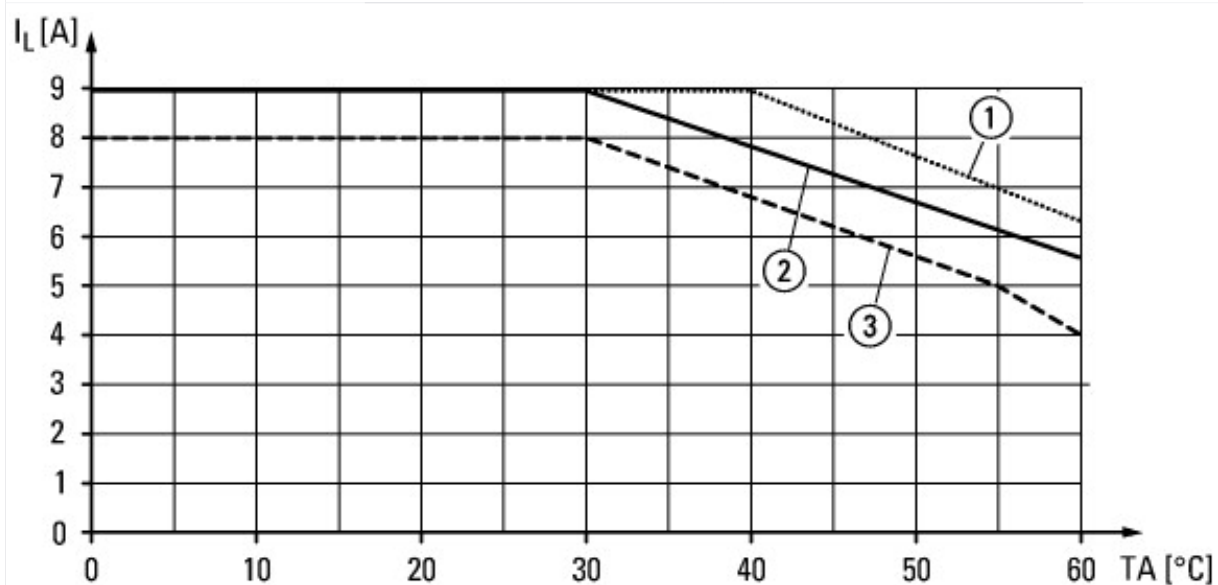

Current derating  
① Single device  
② connected in series with 30 mm clearance  
③ connected in series without clearance

Dimensions

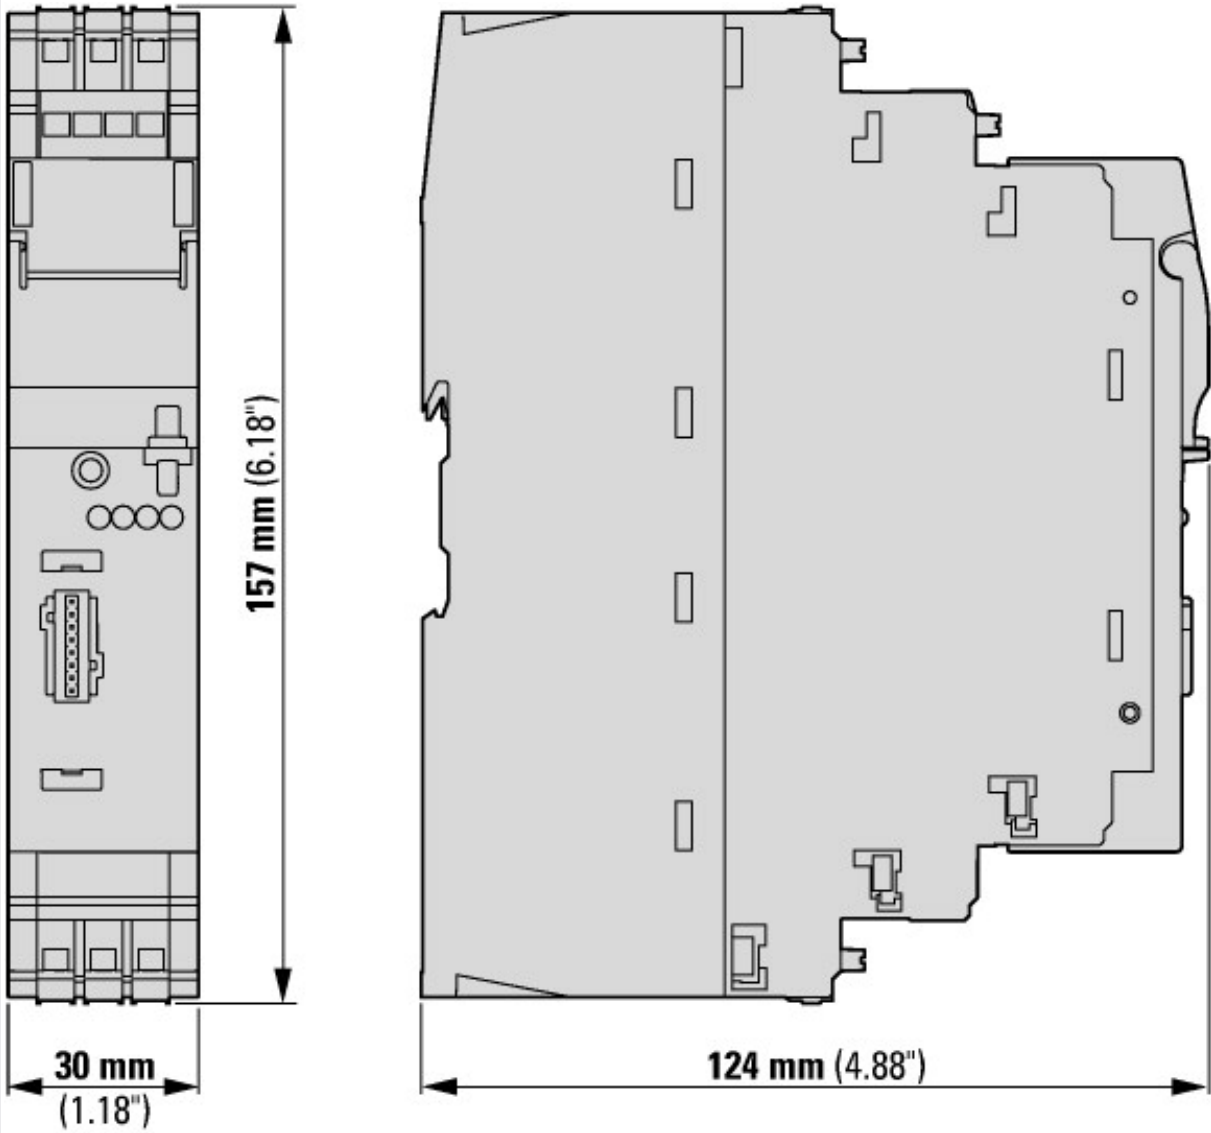

Additional product information (links)

<b>IL120002ZU Electronic motor starter with SWD connection</b>	
IL120002ZU Electronic motor starter with SWD connection	<a href="https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL120002ZU2018_04.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL120002ZU2018_04.pdf</a>
<b>MN034002ZU EMS-....SWD electronic motor starter/EMS electronic motor starter</b>	
MN034002ZU EMS-....SWD electronic motor starter/EMS electronic motor starter - Deutsch / English	<a href="https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN034002ZU_DE_EN.pdf">https://es-assets.eaton.com/DOCUMENTATION/AWB_MANUALS/MN034002ZU_DE_EN.pdf</a>
Produktinformation EMS, Hinweise zur Projektierung	<a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1040938_de.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1040938_de.pdf</a>