





**Contactor, 4 pole, 22 A, 240 V 50 Hz, AC operation**

**Part no.** DILMP20(240V50HZ)  
**Catalog No.** 276959  
**Alternate Catalog No.** XTCF020B00H5

**Delivery program**

|   |                |   |  |
|---|----------------|---|--|
| Product range   |                |   | Contactors   |
| Application   |                |   | Contactors for 4 pole electric consumers   |
| Subrange  |                |   | Contactors up to 200 A, 4 pole   |
| Utilization category                                      |                |   | AC-1: Non-inductive or slightly inductive loads, resistance furnaces<br>NAC-3: Normal AC induction motors: starting, switch off during running |
| Connection technique                                      |                |   | Screw terminals  |
| Number of poles   |                |   | 4 pole   |
| <b>Rated operational current</b>                          |                |   |  |
| AC-1  |                |   |  |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |   |  |
| at 40 °C  | $I_{th} = I_e$ | A | 22   |
| at 50 °C  | $I_{th} = I_e$ | A | 21   |
| at 55 °C  | $I_{th} = I_e$ | A | 20.5   |
| at 60 °C  | $I_{th} = I_e$ | A | 20   |
| Contact sequence  |                |   |   |
| For use with  |                |   | DILM32-XHI(C)...<br>DILA-XHI(V)(C)...  |
| Actuating voltage   |                |   | 240 V 50 Hz  |
| Voltage AC/DC   |                |   | AC operation   |
| Connection to SmartWire-DT                                |                |   | no   |
| <b>Instructions</b>                                       |                |   | Contacts to EN 50 012.   |

**Technical data**
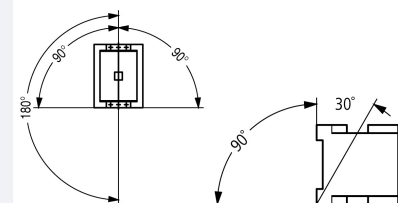
|                                 |              |               |  |
|---------------------------------|--------------|---------------|--|
| <b>General</b>                  |              |               |  |
| Standards                       |              |               | IEC/EN 60947, VDE 0660, UL, CSA  |
| Lifespan, mechanical            |              |               |  |
| AC operated                     | Operations   | $\times 10^6$ | 10   |
| DC operated                     | Operations   | $\times 10^6$ | 10   |
| Operating frequency, mechanical |              |               |  |
| AC operated                     | Operations/h |               | 5000   |
| DC operated                     | Operations/h |               | 5000   |
| Climatic proofing               |              |               | Damp heat, constant, to IEC 60068-2-3<br>Damp heat, cyclic, to IEC 60068-2-30        |
| Ambient temperature             |              |               |  |
| Open                            |              | °C            | -25 - +60  |
| Enclosed                        |              | °C            | - 25 - 40  |
| Storage                         |              | °C            | - 40 - 80  |
| Mounting position               |              |               |  |
| Mounting position               |              |               |  |

|   |                 |  |                                      |
|---|-----------------|--|--------------------------------------|
| Mechanical shock resistance (IEC/EN 60068-2-27)                       |                 |  |                                      |
| Half-sinusoidal shock, 10 ms  |                 |  |                                      |
| Main contacts   |                 |  |                                      |
| N/O contact   | g               |  | 10                                   |
| Auxiliary contacts  |                 |  |                                      |
| N/O contact   | g               |  | 7                                    |
| N/C contact   | g               |  | 5                                    |
| Degree of Protection  |                 |  | IP20                                 |
| Altitude  |                 |  | Max. 2000                            |
| Protection against direct contact when actuated from front (EN 50274) |                 |  | Finger and back-of-hand proof        |
| Stripping length  |                 |  | 10                                   |
| Terminal capacity main cable  |                 |  |                                      |
| Solid   | mm <sup>2</sup> |  | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)   |
| Flexible with ferrule   | mm <sup>2</sup> |  | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Solid or stranded   | AWG             |  | 18 - 14                              |
| Terminal screw  |                 |  | M3.5                                 |
| Tightening torque   |                 |  | Nm 1.2                               |
| Stripping length  |                 |  | 10                                   |
| Terminal capacity control circuit cables                              |                 |  |                                      |
| Solid   | mm <sup>2</sup> |  | 1 x (0.75 - 4)<br>2 x (0.75 - 2.5)   |
| Flexible with ferrule   | mm <sup>2</sup> |  | 1 x (0.75 - 2.5)<br>2 x (0.75 - 2.5) |
| Solid or stranded   | AWG             |  | 18 - 14                              |
| Stripping length  |                 |  | 10                                   |
| Terminal screw  |                 |  | M3.5                                 |
| Tightening torque   |                 |  | Nm 1.2                               |
| Tool  |                 |  |                                      |
| Main cable  |                 |  |                                      |
| Pozidriv screwdriver  | Size            |  | 2                                    |
| Standard screwdriver  | mm              |  | 0.8 x 5.5<br>1 x 6                   |
| Control circuit cables  |                 |  |                                      |
| Pozidriv screwdriver  | Size            |  | 2                                    |
| Standard screwdriver  | mm              |  | 0.8 x 5.5<br>1 x 6                   |

### Main conducting paths

|                                       |             |      |                                  |
|---------------------------------------|-------------|------|----------------------------------|
| Rated impulse withstand voltage       | $U_{imp}$   | V AC | 8000                             |
| Overvoltage category/pollution degree |             |      | III/3                            |
| Rated insulation voltage              | $U_i$       | V AC | 690                              |
| Rated operational voltage             | $U_e$       | V AC | 690                              |
| Safe isolation to EN 61140            |             |      |                                  |
| between coil and contacts             |             | V AC | 400                              |
| between the contacts                  |             | V AC | 400                              |
| Making capacity (cos $\phi$ )         | Up to 690 V | A    | 144<br>According to IEC/EN 60947 |
| Breaking capacity                     |             |      |                                  |
| 220 V 230 V                           |             | A    | 120                              |
| 380 V 400 V                           |             | A    | 120                              |
| 500 V                                 |             | A    | 100                              |
| 660 V 690 V                           |             | A    | 70                               |
| Short-circuit rating                  |             |      |                                  |
| Short-circuit protection maximum fuse |             |      |                                  |
| Type "2" coordination                 |             |      |                                  |
| 400 V                                 | gG/gL 500 V | A    | 20                               |
| 690 V                                 | gG/gL 690 V | A    | 20                               |

|                       |             |   |    |
|-----------------------|-------------|---|----|
| Type "1" coordination |             |   |    |
| 400 V                 | gG/gL 500 V | A | 35 |
| 690 V                 | gG/gL 690 V | A | 25 |

## AC

|   |                |     |      |
|---|----------------|-----|------|
| AC-1  |                |     |      |
| Rated operational current                                 |                |     |      |
| Conventional free air thermal current, 3 pole, 50 - 60 Hz |                |     |      |
| Open  |                |     |      |
| at 40 °C  | $I_{th} = I_e$ | A   | 22   |
| at 50 °C  | $I_{th} = I_e$ | A   | 21   |
| at 55 °C  | $I_{th} = I_e$ | A   | 20.5 |
| at 60 °C  | $I_{th} = I_e$ | A   | 20   |
| enclosed  | $I_{th}$       | A   | 18   |
| Conventional free air thermal current, 1 pole             |                |     |      |
| open  | $I_{th}$       | A   | 60   |
| enclosed  | $I_{th}$       | A   | 54   |
| Motor rating  | P              | kWh |      |
| 220/230 V   | P              | kW  | 8    |
| 240 V   | P              | kW  | 9    |
| 380/400 V   | P              | kW  | 14   |
| 415 V   | P              | kW  | 15   |
| 440 V   | P              | kW  | 16   |
| 500 V   | P              | kW  | 18   |
| 690 V   | P              | kW  | 24   |

## AC-3

|                           |       |     |  |
|---------------------------|-------|-----|--|
| Rated operational current |       |     |  |
| Open, 3-pole: 50 – 60 Hz  |       |     |  |
| Notes                     |       |     | At maximum permissible ambient temperature (open.) |
| 220 V 230 V               | $I_e$ | A   | 12   |
| 240 V                     | $I_e$ | A   | 12   |
| 380 V 400 V               | $I_e$ | A   | 12   |
| 415 V                     | $I_e$ | A   | 12   |
| 440V                      | $I_e$ | A   | 12   |
| 500 V                     | $I_e$ | A   | 10   |
| 660 V 690 V               | $I_e$ | A   | 7  |
| Motor rating              | P     | kWh |  |
| 220 V 230 V               | P     | kW  | 3.5  |
| 240V                      | P     | kW  | 4  |
| 380 V 400 V               | P     | kW  | 5.5  |
| 415 V                     | P     | kW  | 7  |
| 440 V                     | P     | kW  | 7.5  |
| 500 V                     | P     | kW  | 7  |
| 660 V 690 V               | P     | kW  | 6.5  |

## DC

|                                 |       |   |    |
|---------------------------------|-------|---|----|
| Rated operational current, open |       |   |    |
| DC-1                            |       |   |    |
| 60 V                            | $I_e$ | A | 22 |
| 110 V                           | $I_e$ | A | 22 |
| 220 V                           | $I_e$ | A | 6  |

## Current heat loss

|                           |  |    |     |
|---------------------------|--|----|-----|
| 3 pole, at $I_{th}$ (60°) |  | W  | 3   |
| Impedance per pole        |  | mΩ | 2.5 |

## Magnet systems

|                   |         |         |           |
|-------------------|---------|---------|-----------|
| Voltage tolerance |         |         |           |
| AC operated 50 Hz | Pick-up | x $U_c$ | 0.8 - 1.1 |

|  |  |                  |           |
|--|--|------------------|-----------|
| AC operated 50/60 Hz   |  | x U <sub>c</sub> | 0.8 - 1.1 |
| Drop-out voltage AC operated   | Drop-out   | x U <sub>c</sub> | 0.4 - 0.6 |
| Power consumption of the coil in a cold state and 1.0 x U <sub>S</sub> |  |                  |           |
| AC operated 50/60 Hz   | Pick-up  | VA               | 24        |
| AC operated 50/60 Hz   | Pick-up  | W                | 19        |
| AC operated 50/60 Hz   | Sealing  | VA               | 4         |
| AC operated 50/60 Hz   | Sealing  | W                | 1.4       |
| Duty factor  |  | % DF             | 100       |
| Changeover time at 100 % U <sub>S</sub> (recommended value)            |  |                  |           |
| Main contacts  |  |                  |           |
| AC operated  |  |                  |           |
|  | Closing delay  | ms               | 15 - 21   |
|  | Opening delay  | ms               | 9 - 18    |
|  | Permissible residual current with actuation of A1 - A2 by the electronics (with 0 signal). | mA               | ≤ 1       |

### Rating data for approved types

|                                      |                                    |    |              |
|--------------------------------------|------------------------------------|----|--------------|
| Switching capacity                   |                                    |    |              |
| General use                          |                                    | A  | 20           |
| Short Circuit Current Rating         |                                    |    |              |
| Basic Rating                         |                                    |    |              |
|                                      | SCCR                               | kA | 5            |
|                                      | max. Fuse                          | A  | 45           |
|                                      | max. CB                            | A  | 60           |
| 480 V High Fault                     |                                    |    |              |
|                                      | SCCR (fuse)                        | kA | 30           |
|                                      | max. Fuse                          | A  | 25 Class RK5 |
| 600 V High Fault                     |                                    |    |              |
|                                      | SCCR (fuse)                        | kA | 30           |
|                                      | max. Fuse                          | A  | 25 Class RK5 |
| Special Purpose Ratings              |                                    |    |              |
| Electrical Discharge Lamps (Ballast) |                                    |    |              |
|                                      | 480V 60Hz 3phase, 277V 60Hz 1phase | A  | 20           |
|                                      | 600V 60Hz 3phase, 347V 60Hz 1phase | A  | 20           |
| Incandescent Lamps (Tungsten)        |                                    |    |              |
|                                      | 480V 60Hz 3phase, 277V 60Hz 1phase | A  | 14           |
|                                      | 600V 60Hz 3phase, 347V 60Hz 1phase | A  | 14           |
| Resistance Air Heating               |                                    |    |              |
|                                      | 480V 60Hz 3phase, 277V 60Hz 1phase | A  | 20           |
|                                      | 600V 60Hz 3phase, 347V 60Hz 1phase | A  | 20           |
| Refrigeration Control (CSA only)     |                                    |    |              |
|                                      | LRA 480V 60Hz 3phase               | A  | 60           |
|                                      | FLA 480V 60Hz 3phase               | A  | 10           |
|                                      | LRA 600V 60Hz 3phase               | A  | 60           |
|                                      | FLA 600V 60Hz 3phase               | A  | 10           |
| Elevator Control                     |                                    |    |              |
|                                      | 600V 60Hz 3phase                   | HP | 5            |
|                                      | 600V 60Hz 3phase                   | A  | 6.1          |

### Design verification as per IEC/EN 61439

|  |                   |   |     |
|--|-------------------|---|-----|
| Technical data for design verification                   |                   |   |     |
| Rated operational current for specified heat dissipation | I <sub>n</sub>    | A | 22  |
| Heat dissipation per pole, current-dependent             | P <sub>vid</sub>  | W | 1   |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub>  | W | 3   |
| Static heat dissipation, non-current-dependent           | P <sub>vs</sub>   | W | 1.4 |
| Heat dissipation capacity                                | P <sub>diss</sub> | W | 0   |

|  |    |  |
|--|----|--|
| Operating ambient temperature min.   | °C | -25  |
| Operating ambient temperature max.   | °C | 60   |
| IEC/EN 61439 design verification   |    |  |
| 10.2 Strength of materials and parts   |    |  |
| 10.2.2 Corrosion resistance  |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |    | Meets the product standard's requirements.   |
| 10.2.5 Lifting   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |    |  |
| 10.9.2 Power-frequency electric strength   |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |


## Technical data ETIM 7.0


|   |    |                  |
|---|----|------------------|
| Low-voltage industrial components (EG000017) / Power contactor, AC switching (EC000066)   |    |                  |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Contactor (LV) / Power contactor, AC switching (ecl@ss10.0.1-27-37-10-03 [AAB718015]) |    |                  |
| Rated control supply voltage Us at AC 50HZ  | V  | 240 - 240        |
| Rated control supply voltage Us at AC 60HZ  | V  | 0 - 0            |
| Rated control supply voltage Us at DC   | V  | 0 - 0            |
| Voltage type for actuating  |    | AC               |
| Rated operation current Ie at AC-1, 400 V   | A  | 22               |
| Rated operation current Ie at AC-3, 400 V   | A  | 12               |
| Rated operation power at AC-3, 400 V  | kW | 5.5              |
| Rated operation current Ie at AC-4, 400 V   | A  | 10               |
| Rated operation power at AC-4, 400 V  | kW | 4.5              |
| Rated operation power NEMA  | kW | 0                |
| Modular version   |    | No               |
| Number of auxiliary contacts as normally open contact   |    | 0                |
| Number of auxiliary contacts as normally closed contact   |    | 0                |
| Type of electrical connection of main circuit   |    | Screw connection |
| Number of normally closed contacts as main contact  |    | 0                |
| Number of main contacts as normally open contact  |    | 4                |

## Approvals

|                         |  |  |
|-------------------------|--|--|
| Product Standards       |  | IEC/EN 60947-4-1; UL 60947-4-1; CSA - C22.2 No. 60947-4-1-14; CE marking |
| UL File No.             |  | E29096   |
| UL Category Control No. |  | NLDX   |
| CSA File No.            |  | 012528   |


## Characteristics

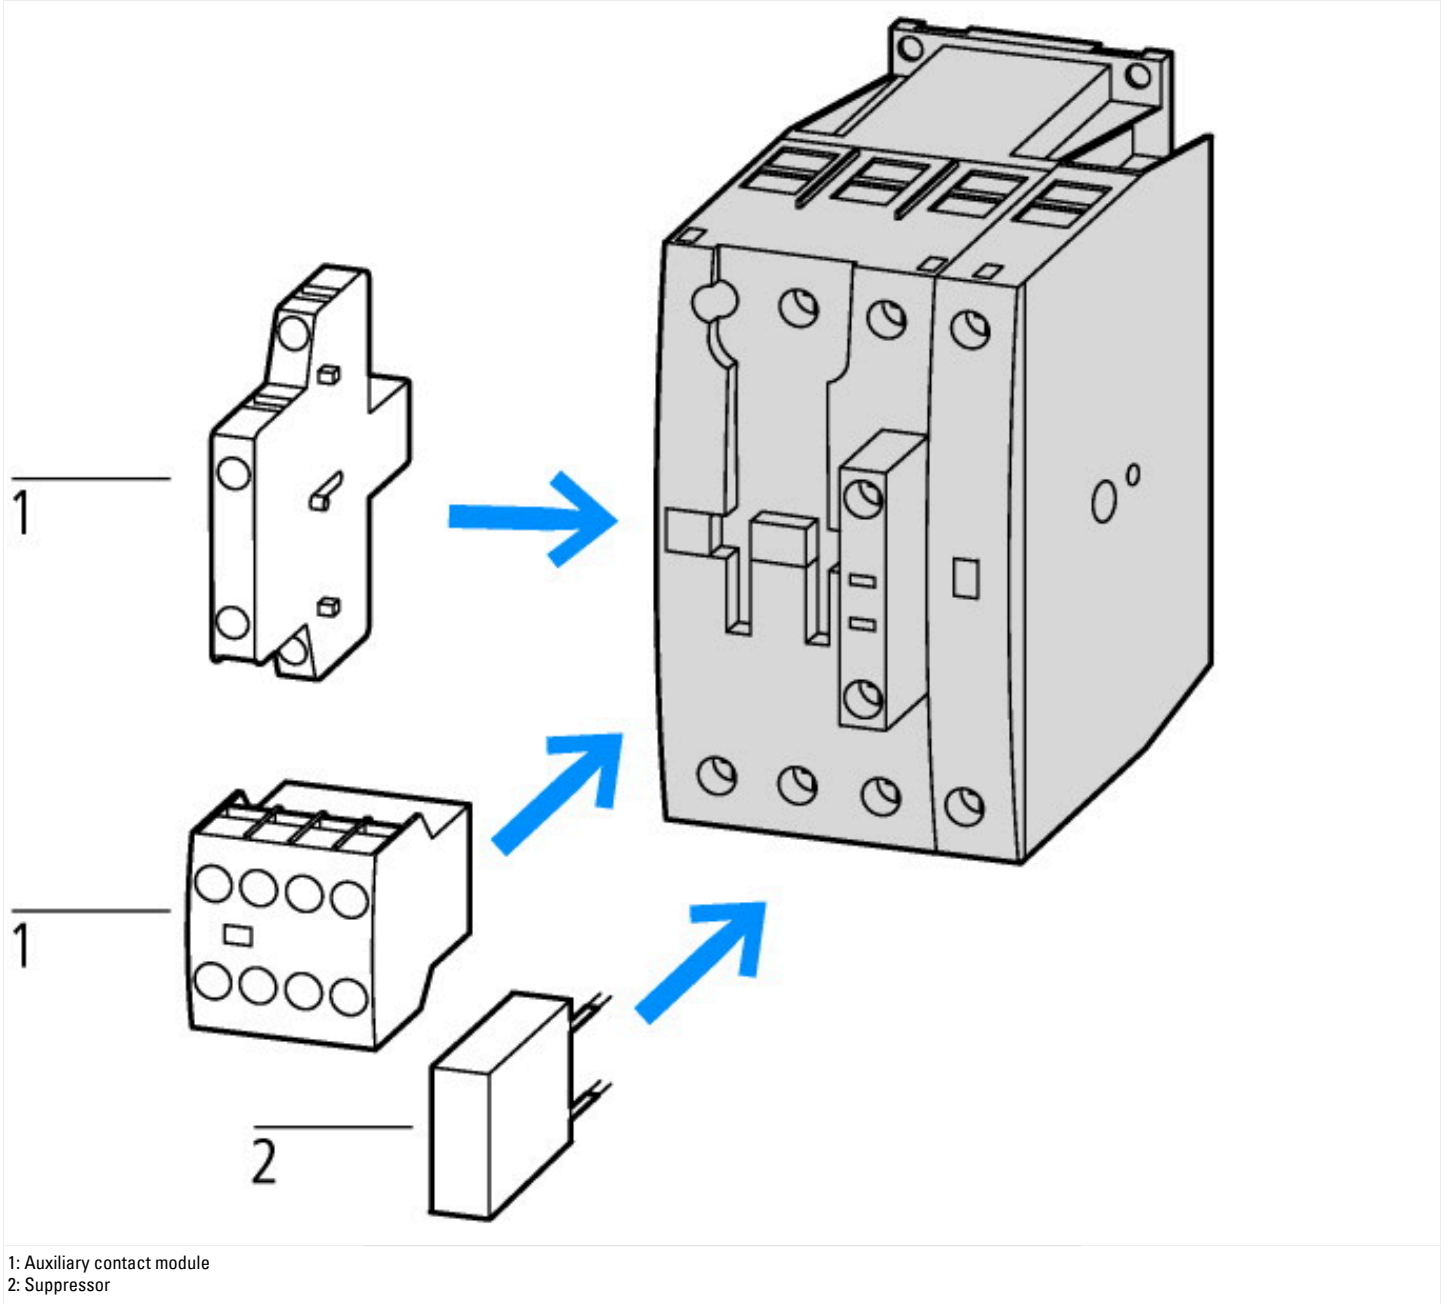

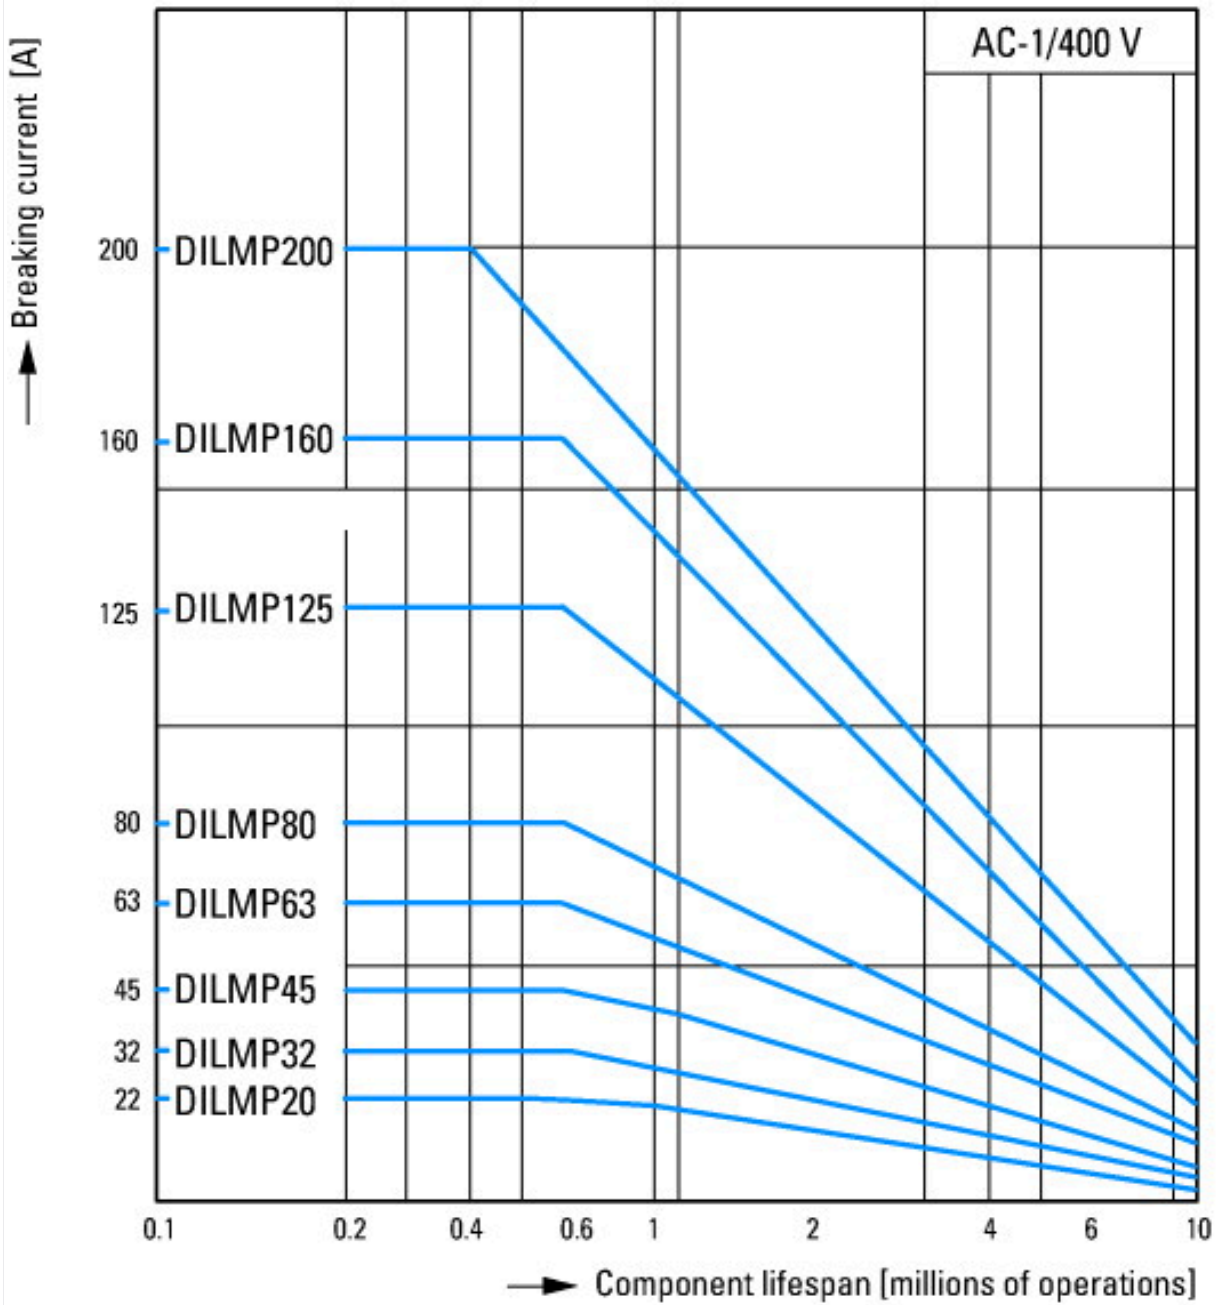


Switching conditions for 4 pole, non-motor loads  
 Operating characteristics  
 Non inductive and slightly inductive loads  
 Electrical characteristics  
 Switch on: 1 x rated operational current  
 Switch off: 1 x rated operational current  
 Utilization category  
 100 % AC-1  
 Typical examples of application  
 Electric heat

## Dimensions

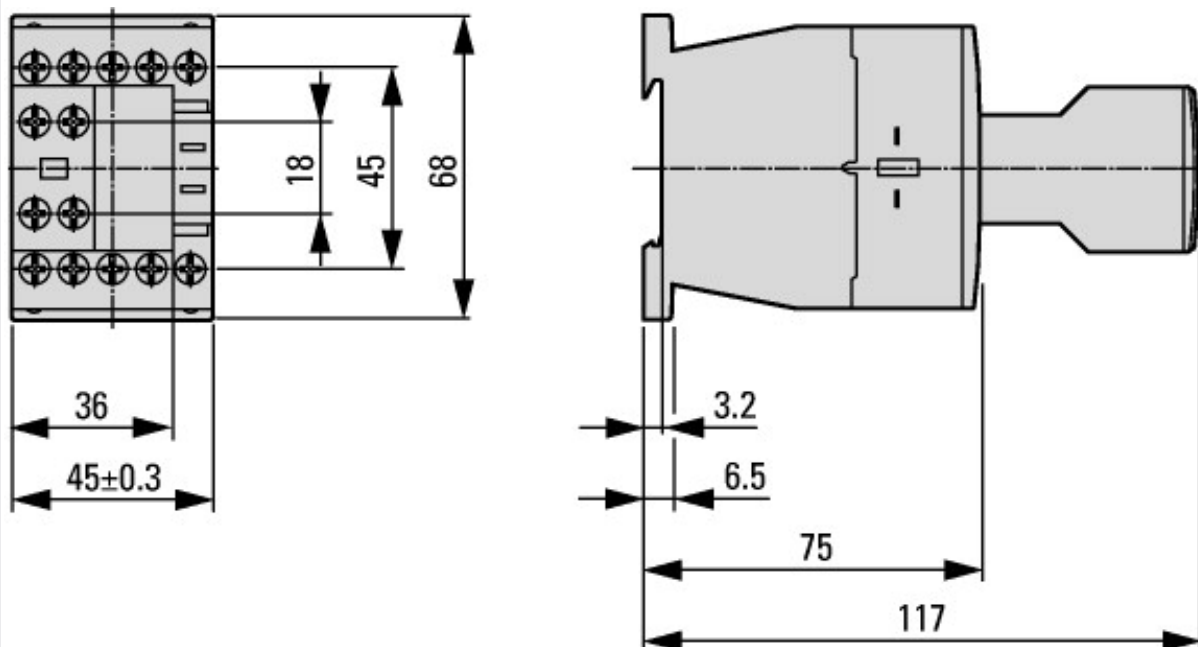

Contacteur avec module de contact auxiliaire



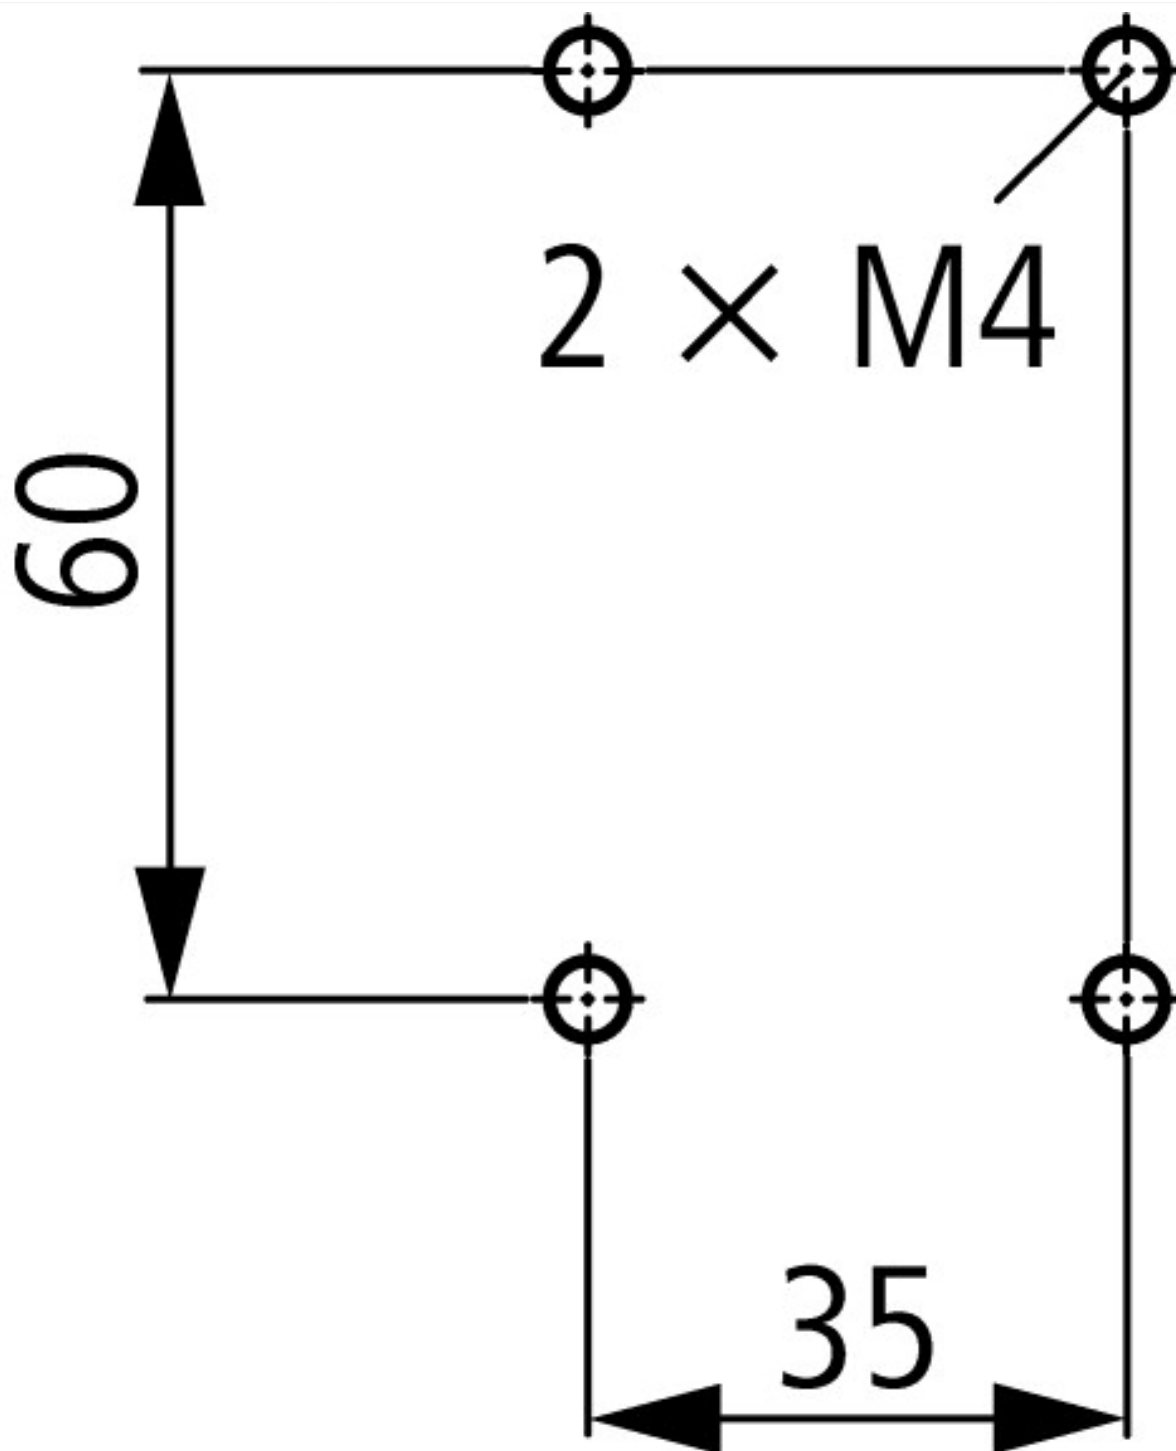

DILMP20

## Assets (links)

### Declaration of CE Conformity

00002875

### Instruction Leaflets

IL03407013Z2018\_07

## Additional product information (links)

### IL03407013Z (AWA2100-2126) Contactors

|  |   |
|--|---|
| IL03407013Z (AWA2100-2126) Contactors  | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2020_05.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03407013Z2020_05.pdf</a>   |
| Motor starters and "Special Purpose Ratings" for the North American market                   | <a href="http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf">http://www.eaton.eu/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_3258146.pdf</a> |
| Switchgear of Power Factor Correction Systems  | <a href="http://www.moeller.net/binary/ver_techpapers/ver934en.pdf">http://www.moeller.net/binary/ver_techpapers/ver934en.pdf</a>   |
| X-Start - Modern Switching Installations Efficiently Fitted and Wired Securely               | <a href="http://www.moeller.net/binary/ver_techpapers/ver938en.pdf">http://www.moeller.net/binary/ver_techpapers/ver938en.pdf</a>   |
| Mirror Contacts for Highly-Reliable Information Relating to Safety-Related Control Functions | <a href="http://www.moeller.net/binary/ver_techpapers/ver944en.pdf">http://www.moeller.net/binary/ver_techpapers/ver944en.pdf</a>   |

|  |   |
|--|---|
| Effect of the Cabel Capacitance of Long Control Cables on the Actuation of Contactors          | <a href="http://www.moeller.net/binary/ver_techpapers/ver949en.pdf">http://www.moeller.net/binary/ver_techpapers/ver949en.pdf</a> |
| Switchgear for Luminaires  | <a href="http://www.moeller.net/binary/ver_techpapers/ver955en.pdf">http://www.moeller.net/binary/ver_techpapers/ver955en.pdf</a> |
| Standard Compliant and Functionally Safe Engineering Design with Mechanical Auxiliary Contacts | <a href="http://www.moeller.net/binary/ver_techpapers/ver956en.pdf">http://www.moeller.net/binary/ver_techpapers/ver956en.pdf</a> |
| The Interaction of Contactors with PLCs  | <a href="http://www.moeller.net/binary/ver_techpapers/ver957en.pdf">http://www.moeller.net/binary/ver_techpapers/ver957en.pdf</a> |
| Busbar Component Adapters for modern Industrial control panels                                 | <a href="http://www.moeller.net/binary/ver_techpapers/ver960en.pdf">http://www.moeller.net/binary/ver_techpapers/ver960en.pdf</a> |