



Step switches, TM, 10 A, flush mounting, 4 contact unit(s), Contacts: 8, 30 °, maintained, With 0 (Off) position, 0-4, Design number 8262



Part no. **TM-4-8262/E**  
 Catalog No. **074878**

**Delivery program**

|  |                |                 |   |
|--|----------------|-----------------|---|
| Product range                                      |                |                 | Control switches  |
| Part group reference                               |                |                 | TM  |
| Basic function                                     |                |                 | Step switches<br>with black thumb grip and front plate                          |
| Contacts   |                |                 | 8   |
| Number of steps                                    |                |                 | 4 steps, 30°  |
| Degree of Protection                               |                |                 | Front IP65  |
| Design   |                |                 | flush mounting  |
| Contact sequence                                   |                |                 |   |
| Switching angle                                    |                | °               | 30  |
| Switching performance                              |                |                 | maintained<br>With 0 (Off) position   |
| Design number                                      |                |                 | 8262  |
| Front plate no.                                    |                |                 | <br>F 002   |
| front plate  |                |                 | 0-4   |
| <b>Motor rating AC-23A, 50 - 60 Hz</b>             |                |                 |   |
| 400 V  | P              | kW              | 3   |
| Rated uninterrupted current                        | I <sub>u</sub> | A               | 10  |
| Note on rated uninterrupted current I <sub>u</sub> |                |                 | Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section. |
| Number of contact units                            |                | contact unit(s) | 4   |

**Technical data**

|                                       |                  |      |   |
|---------------------------------------|------------------|------|---|
| <b>General</b>                        |                  |      |   |
| Standards                             |                  |      | IEC/EN 60947, VDE 0660, CSA, UL<br>Control switch as per IEC/EN 60947-5-1<br>Auxiliary switch as per IEC/EN 60947-5-1 |
| Climatic proofing                     |                  |      | Damp heat, constant, to IEC 60068-2-78<br>Damp heat, cyclic, to IEC 60068-2-30  |
| Ambient temperature                   |                  |      |   |
| Open                                  |                  | °C   | -25 - +50   |
| Overvoltage category/pollution degree |                  |      | III/3   |
| Rated impulse withstand voltage       | U <sub>imp</sub> | V AC | 4000  |
| Mounting position                     |                  |      | As required   |

## Contacts

|  |                |         |   |
|--|----------------|---------|---|
| Electrical characteristics                         |                |         |   |
| Rated operational voltage                          | U <sub>e</sub> | V AC    | 500   |
| Rated uninterrupted current                        | I <sub>u</sub> | A       | 10  |
| Note on rated uninterrupted current I <sub>u</sub> |                |         | Rated uninterrupted current I <sub>u</sub> is specified for max. cross-section. |
| Short-circuit rating                               |                |         |   |
| Fuse   |                | A gG/gL | 10  |

## Switching capacity

|   |                   |                   |  |
|---|-------------------|-------------------|--|
| Safe isolation to EN 61140  |                   |                   |  |
| Current heat loss per contact at I <sub>e</sub>                         |                   | W                 | 0.15   |
| Current heat loss per auxiliary circuit at I <sub>e</sub> (AC-15/230 V) |                   | CO                | 0.15   |
| Lifespan, mechanical  | Operations        | x 10 <sup>6</sup> | > 1  |
| Maximum operating frequency   | Operations/h      |                   | 1200   |
| AC  |                   |                   |  |
| AC-23A  |                   |                   |  |
| Motor rating AC-23A, 50 - 60 Hz   | P                 | kW                |  |
| 400 V 415 V   | P                 | kW                | 3  |
| Control circuit reliability at 24 V DC, 10 mA                           | Fault probability | H <sub>F</sub>    | < 10 <sup>-5</sup> , < 1 failure in 100,000 switching operations |

## Terminal capacities

|                                      |  |                 |                    |
|--------------------------------------|--|-----------------|--------------------|
| Solid or stranded                    |  | mm <sup>2</sup> | 1 x 1,5<br>2 x 1,5 |
| Flexible with ferrules to DIN 46228  |  | mm <sup>2</sup> | 1 x 1.0<br>2 x 1.0 |
| Flexible                             |  | mm <sup>2</sup> | 1 x 1.5<br>2 x 1.5 |
| Terminal screw                       |  |                 | M2.5               |
| Tightening torque for terminal screw |  | Nm              | 0.4                |

## Rating data for approved types

|  |                |       |       |
|--|----------------|-------|-------|
| Contacts                                 |                |       |       |
| Rated operational voltage                | U <sub>e</sub> | V AC  | 300   |
| Rated uninterrupted current max.         |                |       |       |
| Main conducting paths                    |                |       |       |
| General use                              |                | A     | 10    |
| Auxiliary contacts                       |                |       |       |
| General Use                              | I <sub>u</sub> | A     | 10    |
| Pilot Duty                               |                |       | A 300 |
| Switching capacity                       |                |       |       |
| Maximum motor rating                     |                |       |       |
| Single-phase                             |                |       |       |
| 120 V AC                                 |                | HP    | 0.33  |
| 240 V AC                                 |                | HP    | 0.75  |
| 277 V AC                                 |                | HP    | 0.75  |
| Three-phase                              |                |       |       |
| 120 V AC                                 |                | HP    | 0.75  |
| 240 V AC                                 |                | HP    | 1     |
| Terminal capacity                        |                |       |       |
| Solid or flexible conductor with ferrule |                | AWG   | 14    |
| Terminal screw                           |                |       | M2.5  |
| Tightening torque                        |                | lb-in | 3.5   |

## Design verification as per IEC/EN 61439

|  |                  |   |      |
|--|------------------|---|------|
| Technical data for design verification                   |                  |   |      |
| Rated operational current for specified heat dissipation | I <sub>n</sub>   | A | 10   |
| Heat dissipation per pole, current-dependent             | P <sub>vid</sub> | W | 0.15 |
| Equipment heat dissipation, current-dependent            | P <sub>vid</sub> | W | 0    |
| Static heat dissipation, non-current-dependent           | P <sub>vs</sub>  | W | 0    |

|  |                   |    |  |
|--|-------------------|----|--|
| Heat dissipation capacity  | P <sub>diss</sub> | W  | 0  |
| Operating ambient temperature min.   |                   | °C | -25  |
| Operating ambient temperature max.   |                   | °C | 50   |
| IEC/EN 61439 design verification   |                   |    |  |
| 10.2 Strength of materials and parts   |                   |    |  |
| 10.2.2 Corrosion resistance  |                   |    | Meets the product standard's requirements.   |
| 10.2.3.1 Verification of thermal stability of enclosures   |                   |    | Meets the product standard's requirements.   |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat   |                   |    | Meets the product standard's requirements.   |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects |                   |    | Meets the product standard's requirements.   |
| 10.2.4 Resistance to ultra-violet (UV) radiation   |                   |    | UV resistance only in connection with protective shield.   |
| 10.2.5 Lifting   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.6 Mechanical impact   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.2.7 Inscriptions  |                   |    | Meets the product standard's requirements.   |
| 10.3 Degree of protection of ASSEMBLIES  |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.4 Clearances and creepage distances   |                   |    | Meets the product standard's requirements.   |
| 10.5 Protection against electric shock   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.6 Incorporation of switching devices and components   |                   |    | Does not apply, since the entire switchgear needs to be evaluated.   |
| 10.7 Internal electrical circuits and connections  |                   |    | Is the panel builder's responsibility.   |
| 10.8 Connections for external conductors   |                   |    | Is the panel builder's responsibility.   |
| 10.9 Insulation properties   |                   |    |  |
| 10.9.2 Power-frequency electric strength   |                   |    | Is the panel builder's responsibility.   |
| 10.9.3 Impulse withstand voltage   |                   |    | Is the panel builder's responsibility.   |
| 10.9.4 Testing of enclosures made of insulating material   |                   |    | Is the panel builder's responsibility.   |
| 10.10 Temperature rise   |                   |    | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating   |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.12 Electromagnetic compatibility  |                   |    | Is the panel builder's responsibility. The specifications for the switchgear must be observed.                                   |
| 10.13 Mechanical function  |                   |    | The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.                         |

## Technical data ETIM 7.0


|  |  |   |                 |
|--|--|---|-----------------|
| Low-voltage industrial components (EG000017) / Control switch (EC002611)   |  |   |                 |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Off-load switch, circuit breaker, control switch / Control switch (ecl@ss10.0.1-27-37-14-14 [ACN998011]) |  |   |                 |
| Type of switch   |  |   | Level switch    |
| Number of poles  |  |   | 2               |
| Max. rated operation voltage U <sub>e</sub> AC   |  | V | 500             |
| Rated permanent current I <sub>u</sub>   |  | A | 10              |
| Number of switch positions   |  |   | 5               |
| With 0 (off) position  |  |   | Yes             |
| With retraction in 0-position  |  |   | No              |
| Device construction  |  |   | Built-in device |
| Width in number of modular spacings  |  |   | 0               |
| Suitable for ground mounting   |  |   | No              |
| Suitable for front mounting 4-hole   |  |   | Yes             |
| Suitable for distribution board installation   |  |   | No              |
| Suitable for intermediate mounting   |  |   | No              |
| Complete device in housing   |  |   | No              |
| Type of control element  |  |   | Toggle          |
| Front shield size  |  |   | 30x30 mm        |
| Degree of protection (IP), front side  |  |   | IP65            |
| Degree of protection (NEMA), front side  |  |   | Other           |

## Approvals

|                   |  |   |
|-------------------|--|---|
| Product Standards |  | UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94; IEC/EN 60947-3; CE marking |
|-------------------|--|---|

|                             |  |
|-----------------------------|--|
| UL File No.                 | E36332                                       |
| UL Category Control No.     | NLRV   |
| CSA File No.                | UL report applies to both US and Canada      |
| North America Certification | UL listed, certified by UL for use in Canada |
| Degree of Protection        | IEC: IP65; UL/CSA Type: –                    |

## Dimensions

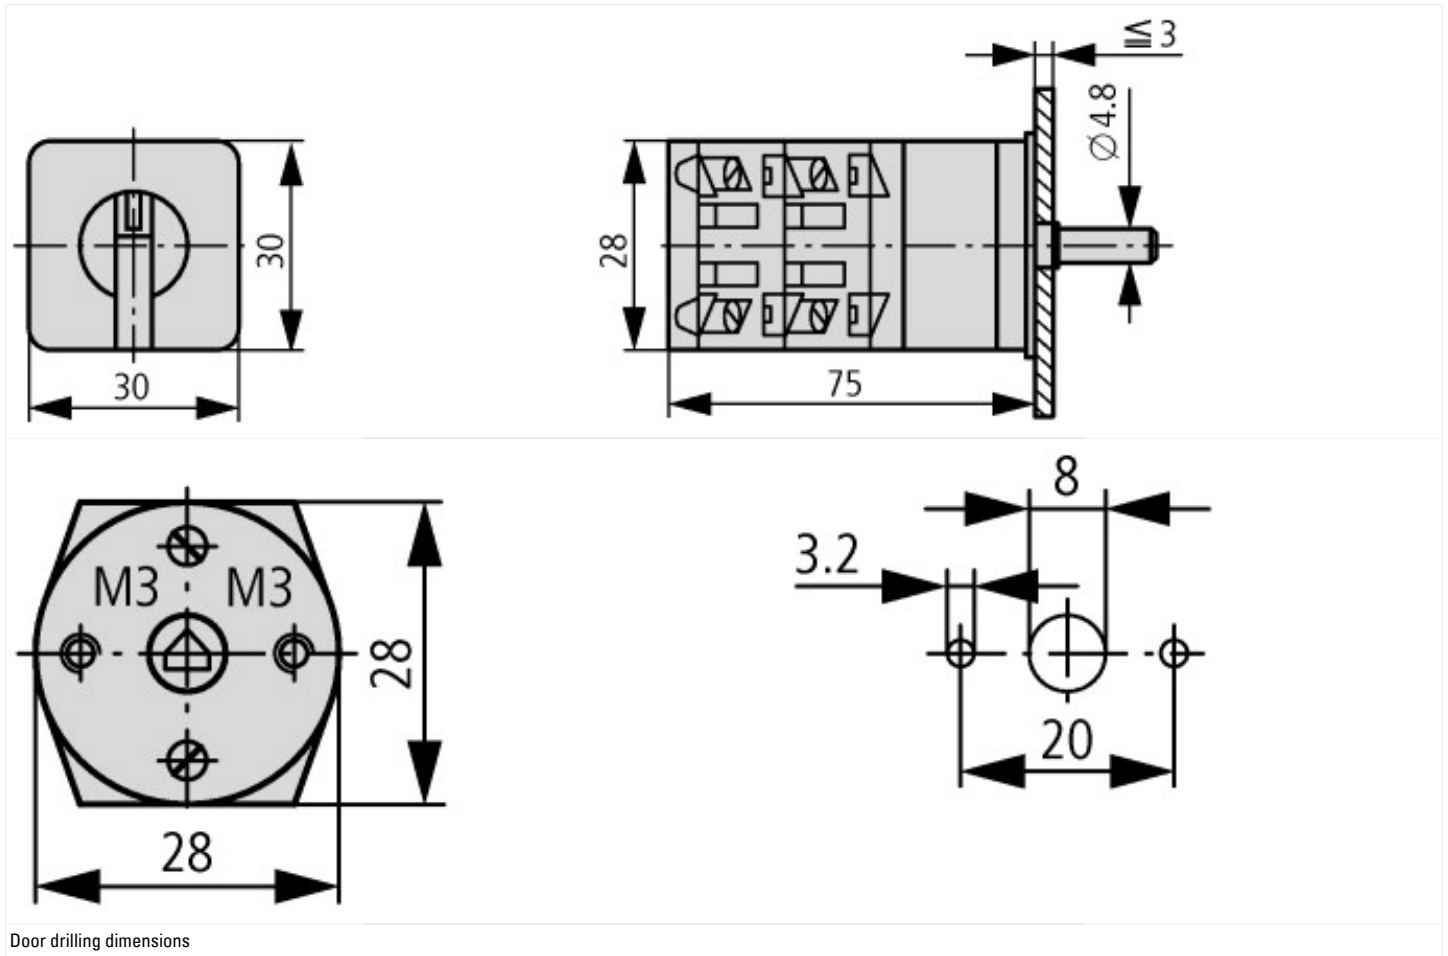

Door drilling dimensions

## Assets (links)

### Declaration of CE Conformity

00002932

### Instruction Leaflets

IL03801026Z2018\_04

## Additional product information (links)

| IL03801026Z step switch                                      |   |
|--|---|
| IL03801026Z step switch                                      | <a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801026Z2018_04.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL03801026Z2018_04.pdf</a>                           |
| Display flip catalog page.                                   | <a href="http://ecat.moeller.net/flip-cat/?edition=K115A&amp;startpage=172">http://ecat.moeller.net/flip-cat/?edition=K115A&amp;startpage=172</a>   |
| Technical overview cam switch, switch-disconnector           | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.2</a>                                     |
| System overview cam switch T                                 | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.4</a>                                     |
| System overview switch-disconnector P                        | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.6</a>                                     |
| Key to part numbers Cam switch                               | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Key to part numbers Switch-disconnector                      | <a href="http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8">http://de.ecat.moeller.net/flip-cat/?edition=HPLTEv1&amp;startpage=4.8</a>                                     |
| Switches for ATEX  | <a href="http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html">http://www.coopercrouse-hinds.eu/en/products/25-ex-safety-and-main-current-switches.html</a> |
| Ordering form for SOND switches and SOND front plates(DE_EN) | <a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008005ZU_Orderform_Customized_Switch.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008005ZU_Orderform_Customized_Switch.pdf</a>             |
| Ordering form for SOND switches and SOND front plates(DE_EN) | <a href="ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008006ZU_Orderform_Customized_Switch.pdf">ftp://ftp.moeller.net/DOCUMENTATION/PDF/MZ008006ZU_Orderform_Customized_Switch.pdf</a>             |