




**Digital residual current circuit-breaker, all-current sensitive, 63 A, 4p, 300 mA, type G/B**

**Part no.** FRCDM-63/4/03-G/B  
**Catalog No.** 167898  
**Alternate Catalog No.** FRCDM-63/4/03-G/B  
**EL-Nummer (Norway)** 0001664181

Similar to illustration

### Delivery program

Basic function			Residual current circuit-breakers , digital
Number of poles			4 pole
Application			Switchgear for industrial and advanced commercial applications
Rated current	$I_n$	A	63
Rated short-circuit strength	$I_{cn}$	kA	10
Rated fault current	$I_{\Delta N}$	A	0.3
Type			Type G/B (ÖVE E 8601)
Tripping		s...	Short time-delayed
Product range			FRCDM
Sensitivity			All current sensitive
Impulse withstand current			Surge-proof, 3 kA
Contact sequence			

### Technical data

#### Electrical

Types conform to			IEC/EN 61008 IEC/EN 62423 ÖVE E 8601
Current test marks			As per inscription
Tripping		s...	10 ms delayed
Rated voltage according to IEC/EN 60947-2	$U_n$	V AC	240/415
Rated frequency	f	Hz	50/60
Limit values of the operating voltage			
electronic		V AC	50 - 456
Test circuit		V AC	196 - 456
Rated fault current	$I_{\Delta n}$	mA	300
Sensitivity			All current sensitive
Rated insulation voltage	$U_i$	V	440
Rated impulse withstand voltage	$U_{imp}$	kV	4
Rated short-circuit strength	$I_{cn}$	kA	10
Impulse withstand current			3 kA (8/20 $\mu$ s) surge-proof
Max. admissible back-up fuse			
Short-circuit	gG/gL	A	63
Overload	gG/gL	A	63
Rated making and breaking capacity / Rated residual making and breaking capacity	$I_m / I_{\Delta m}$	A	630
lifespan			
Electrical	Operations		$\geq 4000$
Mechanical	Operations		$\geq 20000$

## Dry auxiliary contact

Rated switching capacity			
30 VDC (resistive load)	A		2
240 VAC (resistive load)	A		0.25
Max. switching duty (resistive load)	W		60
Max. switching voltage AC	V		240
Max. switching voltage DC	V		220
Maximum switching current	A		2
Min. switching capacity (reference value)			10 $\mu$ A, 10 mV DC
lifespan			
Electrical (at 20 switching operations per minute) 2 A 30 VDC resistive load	Operations		$\geq 10^5$
Electrical (at 20 switching operations per minute) 1 A 30 VDC resistive load	Operations		$\geq 5 \times 10^5$
Terminal capacity	mm <sup>2</sup>		0.25 - 1.5

## Mechanical

Standard front dimension	mm		45
Device height	mm		80
Built-in width	mm		70 (4TE)
Mounting			Quick attachment with 2 latch positions for DIN-rail IEC/EN 60715
Degree of Protection			IP20, IP40 with suitable enclosure
Terminals top and bottom			Twin-purpose terminals
Terminal protection			finger and hand touch safe, DGUV VS3, EN 50274
Terminal cross-section			
Solid	mm <sup>2</sup>		1.5 - 35
Stranded	mm <sup>2</sup>		2 x 16
Terminal cross-section			M5 (with cross-recessed screw as defined in EN ISO 4757-Z2, Pozidriv PZ2)
Tightening torque of fixing screws	N/m		2 - 2.4
Thickness of busbar material	mm		0.8 - 2
Admissible ambient temperature range	°C		-25 - +40
Permissible storage and transport temperatures	°C		-35 - +60
Climatic proofing			25-55°C/90-95% relative humidity according to IEC 60068-2
Mounting position			As required
Contact position indicator			red / green
Trip indication			white / blue

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	A	63
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	2.5
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	10
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	60
			Maximum operating temperature is 60 °C in accordance with the de-rating table
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			
			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			
			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			
			Meets the product standard's requirements.
10.2.5 Lifting			
			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			
			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			
			Meets the product standard's requirements.

10.3 Degree of protection of ASSEMBLIES		Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances		Meets the product standard's requirements.
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.
10.8 Connections for external conductors		Is the panel builder's responsibility.
10.9 Insulation properties		
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.


## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Residual current circuit breaker (RCCB) (EC000003)

Electric engineering, automation, process control engineering / Electrical installation, device / Residual current protection system / Residual current circuit breaker (RCCB) (ecl@ss10.0.1-27-14-22-01 [AAB906014])

Number of poles		4
Rated voltage	V	415
Rated current	A	63
Rated fault current	mA	300
Rated insulation voltage $U_i$	V	440
Rated impulse withstand voltage $U_{imp}$	kV	4
Mounting method		DIN rail
Leakage current type		B
Selective protection		No
Short-time delayed tripping		Yes
Short-circuit breaking capacity (I <sub>cw</sub> )	kA	10
Surge current capacity	kA	3
Frequency		50/60 Hz
Additional equipment possible		Yes
With interlocking device		Yes
Degree of protection (IP)		IP20
Width in number of modular spacings		4
Built-in depth	mm	70.5
Ambient temperature during operating	°C	-25 - 40
Pollution degree		2
Connectable conductor cross section multi-wired	mm <sup>2</sup>	1.5 - 16
Connectable conductor cross section solid-core	mm <sup>2</sup>	1.5 - 35

## Characteristics

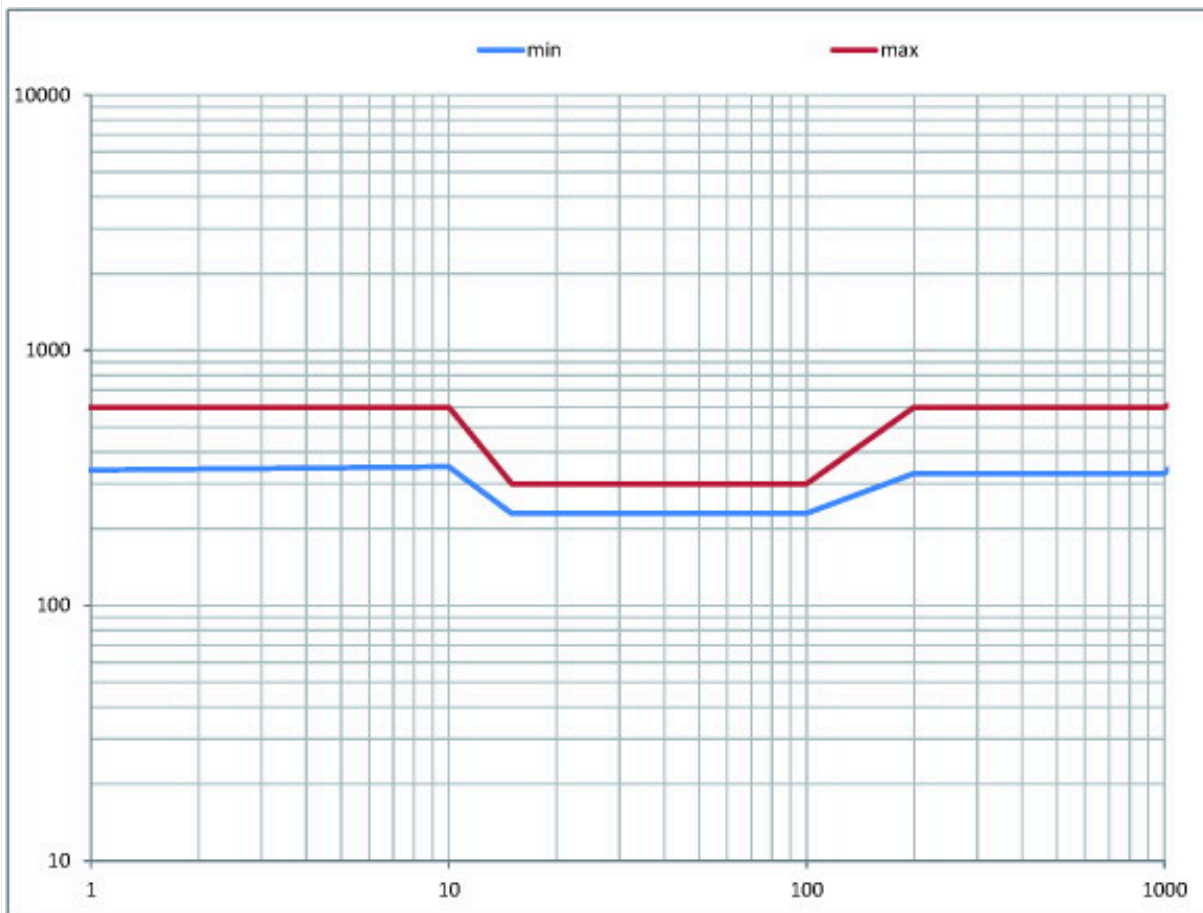


Tripping current frequency range: | FRCdM, 300 mA, type B

# Influence of the ambient temperature to the maximum continuous current (A)

Range	<b>FRCdM type B, Bfq, B+</b>		
Ambient temperature	Amperage		
	RCCB rating 25A	RCCB rating 40A	RCCB rating 63A
40°	25	40	63
45°	25	40	56
50°	25	40	50
55°	25	35	45
60°	25	30	40

Derating - table FRCdM\_B

## Dimensions

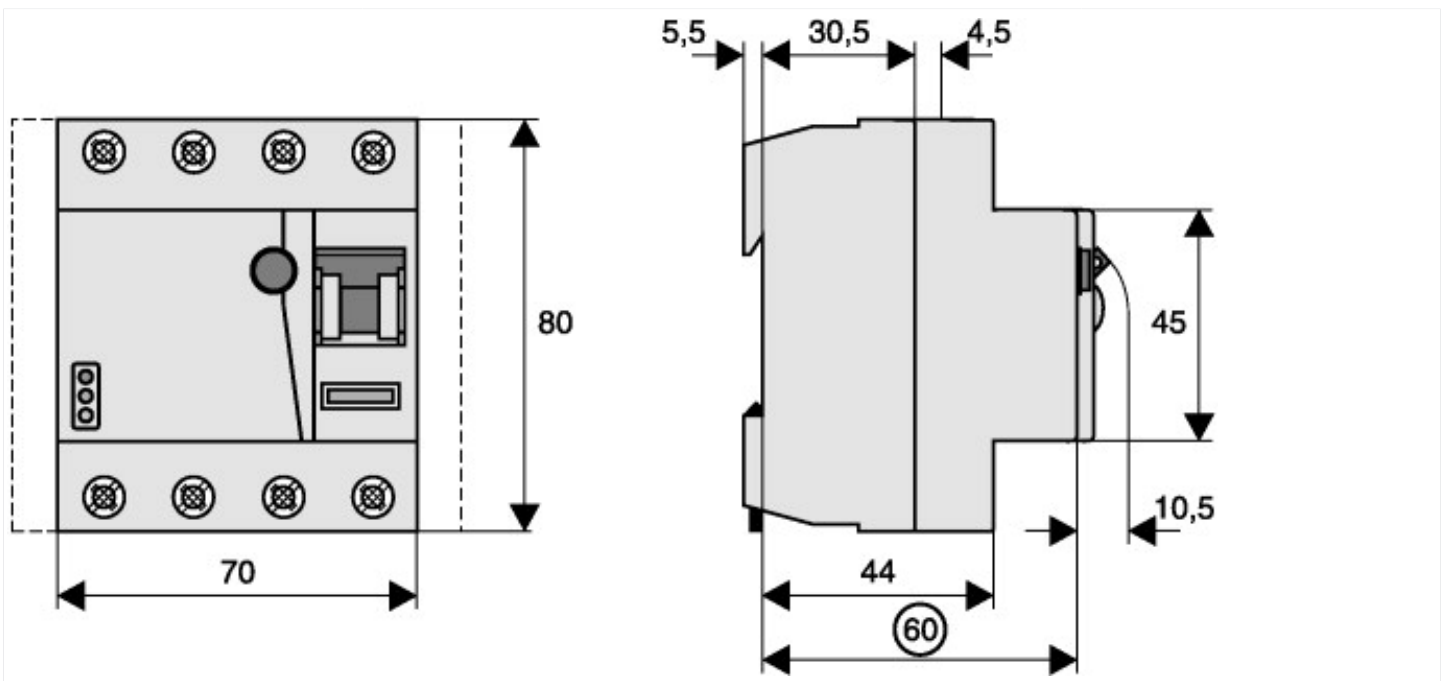

## Additional product information (links)

Product overview (Web)

<http://www.eaton.eu/Europe/Electrical/ProductsServices/CircuitProtection/DigitalCircuitBreakers/index.htm>

