




**Acoustic device pulsed tone, 12-36V**

**Part no.** SL-AP24  
**Catalog No.** 205343  
**Alternate Catalog No.** SL-AP24

### Delivery program

Product range			SL signal towers
Single unit/Complete unit			Element
Degree of Protection			IP20
Type of tone			Pulsed tone
Loudness			12 V: 61 dB 24 V: 66 dB 36 V: 77 dB
Description			5 Hz with f = 2750 Hz In 60 cm spacing
Rated operational voltage	U <sub>e</sub>	V	12 - 36 V AC/DC
Rated operational current	I <sub>e</sub>	mA	8 - 12
<b>Colour</b>			Black
			
Connection to SmartWire-DT			no

### Design verification as per IEC/EN 61439

Technical data for design verification			
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55


### Technical data ETIM 5.0

Low-voltage industrial components (EG000017) / Acoustic module for signal tower (EC001261)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Command and alarm device / Signal column element, acoustic (ecl@ss8-27-37-12-37 [AKF055010])			
Function			Pulse tone
Outer diameter		mm	0
Degree of protection (IP)			IP20
Colour			Black
Operating voltage at AC 50 Hz		V	0 - 0
Operating voltage at AC 60 Hz		V	0 - 0
Operating voltage at DC		V	0 - 0
Voltage type			DC
Tone adjustable			No

### Approvals

Product Standards			IEC/EN 60947-5; UL 508; CSA-C22.2 No. 14-05; CSA-C22.2 No. 94-91; CE marking
UL File No.			E29184
UL Category Control No.			NKCR
CSA File No.			012528
CSA Class No.			3211-03
North America Certification			UL listed, CSA certified

## Dimensions

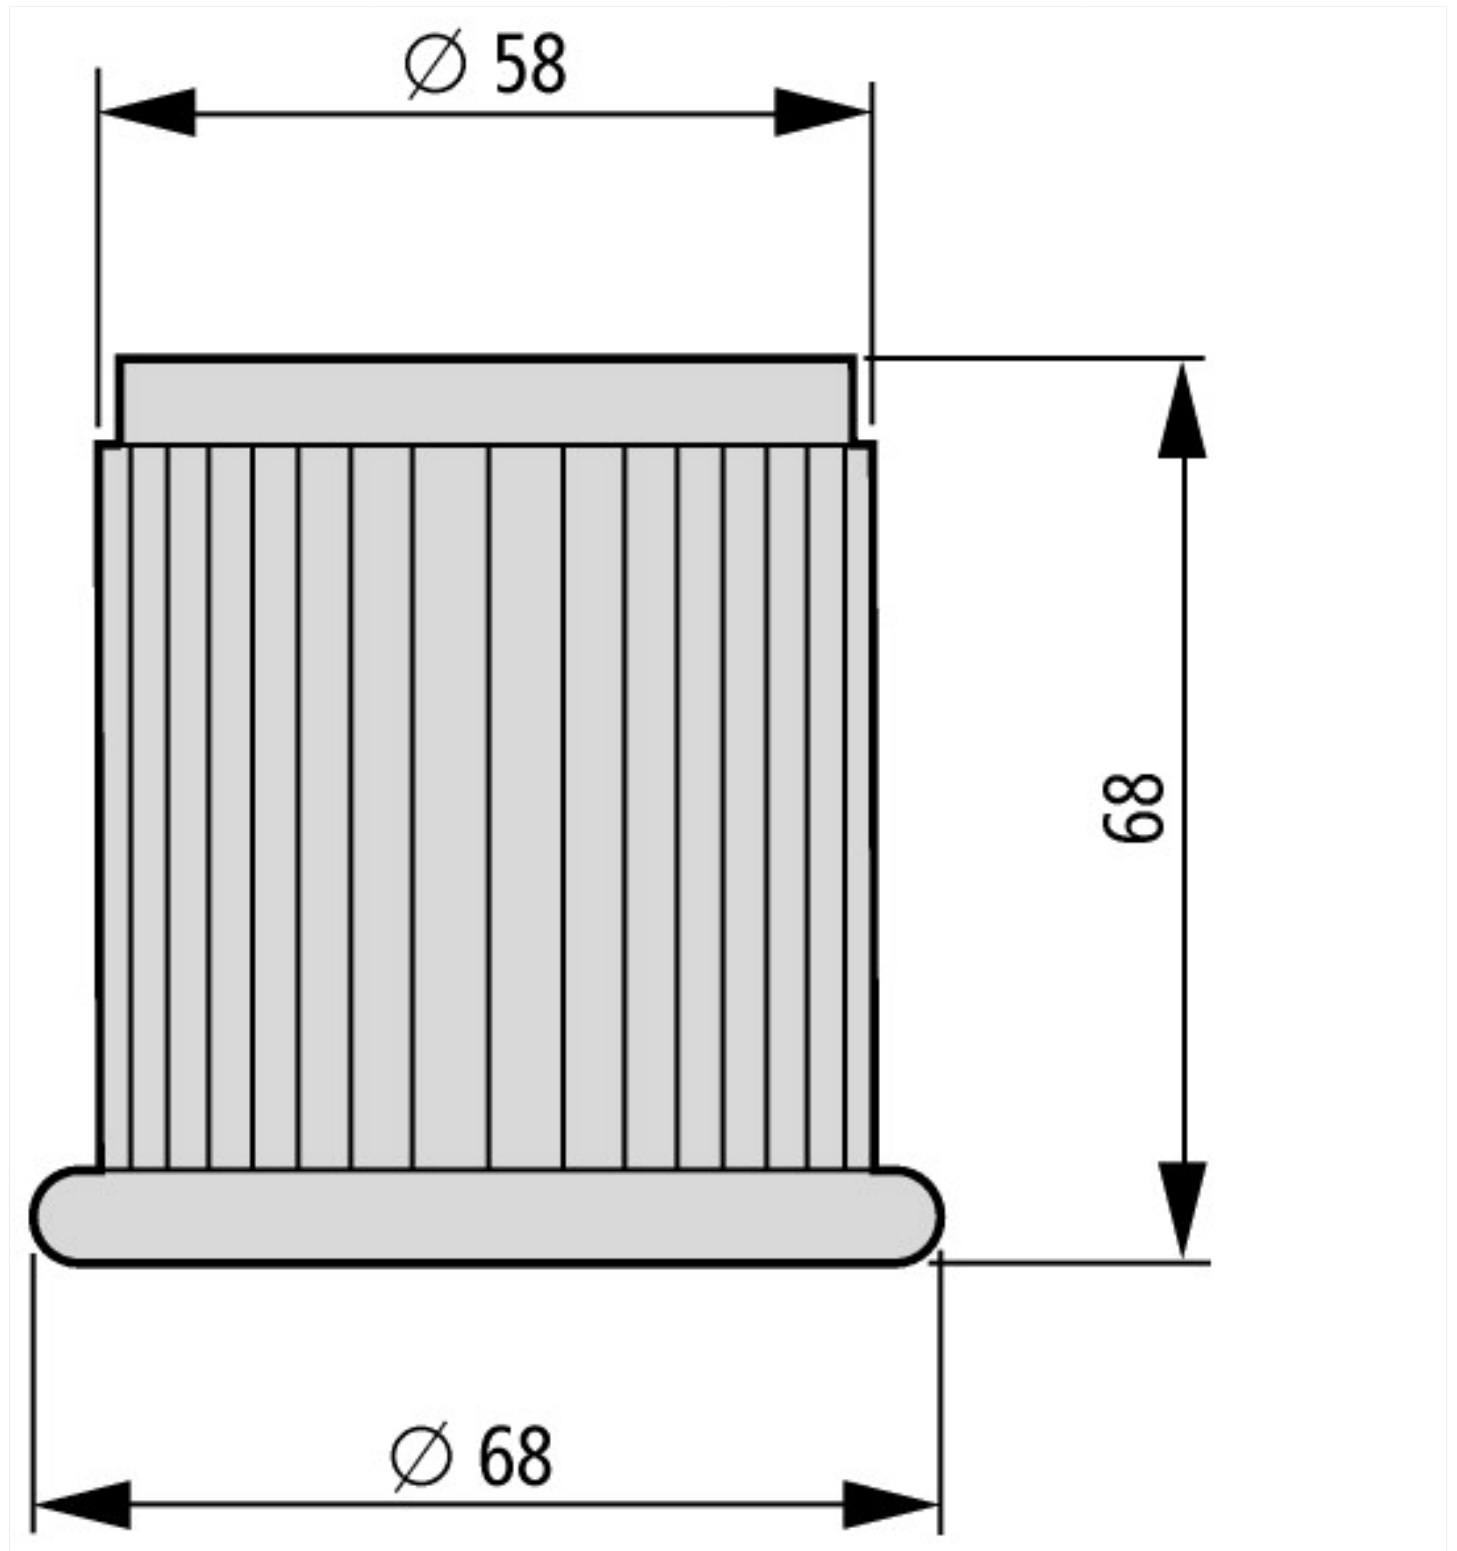

## Additional product information (links)

IL04716024Z (AWA1160-1685) Pillar lamps

IL04716024Z (AWA1160-1685) Pillar lamps

[https://es-assets.eaton.com/DOCUMENTATION/AWA\\_INSTRUCTIONS/IL04716024Z2018\\_05.pdf](https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL04716024Z2018_05.pdf)