



**Miniature circuit breaker (MCB), 4A, 3Np, K-Char, AC**

**Part no.** FAZ-K4/3N  
**Catalog No.** 279008  
**Alternate Catalog No.** FAZ-K4/3N  
**EL-Nummer (Norway)** 1605974

Similar to illustration

**Delivery program**

|   |          |    |  |
|---|----------|----|--|
| Basic function                                  |          |    | Miniature circuit-breakers                                     |
| Number of poles                                 |          |    | 3 pole+N   |
| Tripping characteristic                         |          |    | K  |
| Application                                     |          |    | Switchgear for industrial and advanced commercial applications |
| Rated current                                   | $I_n$    | A  | 4  |
| Rated switching capacity acc. to IEC/EN 60947-2 | $I_{cu}$ | kA | 10   |
| Product range                                   |          |    | FAZ  |

**Technical data**

**Electrical**

|   |            |         |                                |
|---|------------|---------|--------------------------------|
| Standards                                       |            |         | IEC/EN 60947-2<br>IEC/EN 60898 |
| Rated operational voltage                       | $U_e$      | V       |                                |
|   |            | V AC    | 240/415                        |
|   |            | V DC    | 60 (per pole)                  |
| Rated switching capacity acc. to IEC/EN 60947-2 | $I_{cu}$   | kA      | 10                             |
| Operational switching capacity                  |            | kA      | 7.5                            |
| Characteristic                                  |            |         | B, C, D, K, S, Z               |
| Max. back-up fuse                               |            | A gL/gG | 125                            |
| Selectivity Class                               |            |         | 3                              |
| lifespan  |            |         |                                |
| Lifespan  | Operations |         | > 10000                        |
| Direction of incoming supply                    |            |         | as required                    |

**Mechanical**

|                              |  |        |   |
|------------------------------|--|--------|---|
| Standard front dimension     |  | mm     | 45                                      |
| Enclosure height             |  | mm     | 80                                      |
| Mounting width per pole      |  | mm     | 17.5                                    |
| Mounting                     |  |        | IEC/EN 60715 top-hat rail               |
| Degree of Protection         |  |        | IP20, IP40 (when fitted)                |
| Terminals top and bottom     |  |        | Twin-purpose terminals                  |
| Terminal protection          |  |        | Finger and back-of-hand proof to BGV A2 |
| Terminal capacities          |  | $mm^2$ |   |
|                              |  | $mm^2$ | 1 x 25                                  |
|                              |  | $mm^2$ | 2 x 10                                  |
| Thickness of busbar material |  | mm     | 0.8 ... 2                               |
| Mounting position            |  |        | As required                             |

**Design verification as per IEC/EN 61439**

|  |           |   |     |
|--|-----------|---|-----|
| Technical data for design verification                   |           |   |     |
| Rated operational current for specified heat dissipation | $I_n$     | A | 4   |
| Heat dissipation per pole, current-dependent             | $P_{vid}$ | W | 0   |
| Equipment heat dissipation, current-dependent            | $P_{vid}$ | W | 5.2 |

|  |            |    |   |
|--|------------|----|---|
| Static heat dissipation, non-current-dependent | $P_{vs}$   | W  | 0   |
| Heat dissipation capacity                      | $P_{diss}$ | W  | 0   |
| Operating ambient temperature min.             |            | °C | -40   |
| Operating ambient temperature max.             |            | °C | 75  |
|  |            |    | linear, per +1 °C, results in a 0.5% reduction of current carrying capacity |

## Technical data ETIM 7.0

Circuit breakers and fuses (EG000020) / Miniature circuit breaker (MCB) (EC000042)

Electric engineering, automation, process control engineering / Electrical installation, device / Miniature circuit breaker system (MCB) / Miniature circuit breaker (MCB)  
(ecl@ss10.0.1-27-14-19-01 [AAB905014])

|   |  |                 |          |
|---|--|-----------------|----------|
| Release characteristic  |  |                 | K        |
| Number of poles (total)   |  |                 | 4        |
| Number of protected poles   |  |                 | 3        |
| Rated current   |  | A               | 4        |
| Rated voltage   |  | V               | 400      |
| Rated insulation voltage $U_i$                                      |  | V               | 440      |
| Rated impulse withstand voltage $U_{imp}$                           |  | kV              | 4        |
| Rated short-circuit breaking capacity $I_{cn}$ EN 60898 at 230 V    |  | kA              | 0        |
| Rated short-circuit breaking capacity $I_{cn}$ EN 60898 at 400 V    |  | kA              | 0        |
| Rated short-circuit breaking capacity $I_{cu}$ IEC 60947-2 at 230 V |  | kA              | 10       |
| Rated short-circuit breaking capacity $I_{cu}$ IEC 60947-2 at 400 V |  | kA              | 10       |
| Voltage type  |  |                 | AC       |
| Frequency   |  | Hz              | 50 - 60  |
| Current limiting class  |  |                 | 3        |
| Suitable for flush-mounted installation                             |  |                 | No       |
| Concurrently switching N-neutral                                    |  |                 | Yes      |
| Over voltage category   |  |                 | 3        |
| Pollution degree  |  |                 | 2        |
| Additional equipment possible                                       |  |                 | Yes      |
| Width in number of modular spacings                                 |  |                 | 4        |
| Built-in depth  |  | mm              | 70.5     |
| Degree of protection (IP)   |  |                 | IP20     |
| Ambient temperature during operating                                |  | °C              | -25 - 75 |
| Connectable conductor cross section multi-wired                     |  | mm <sup>2</sup> | 1 - 25   |
| Connectable conductor cross section solid-core                      |  | mm <sup>2</sup> | 1 - 25   |

# Characteristics



Let-through energy  $i^2t$   
According to IEC/EN 60898










Tripping characteristic at 30 °C:  
 K according to IEC/EN 60947

## Dimensions

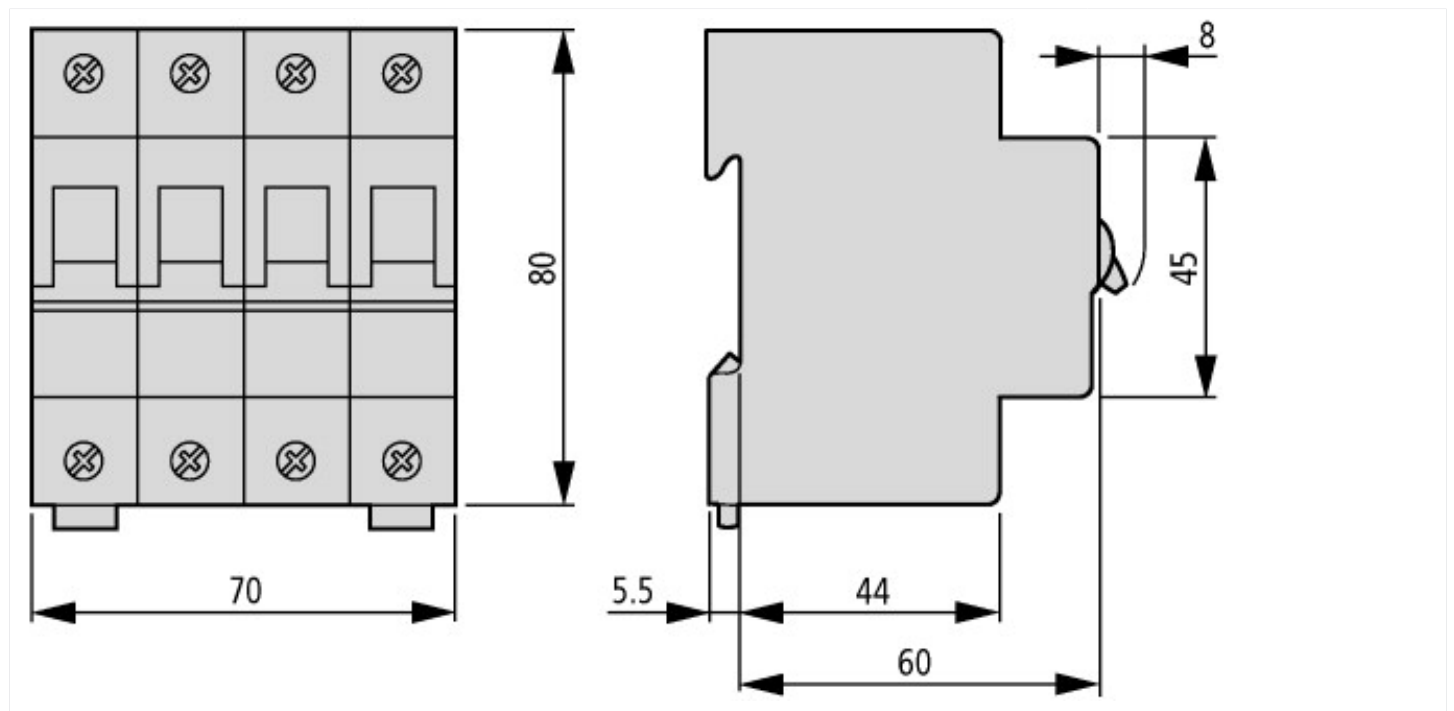

## Additional product information (links)

### AWA1220-1755 Circuit-breaker

AWA1220-1755 Circuit-breaker

[ftp://ftp.moeller.net/DOCUMENTATION/AWA\\_INSTRUCTIONS/17550701.pdf](ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/17550701.pdf)

Temperature dependency, derating

<https://www.eaton.com/content/dam/eaton/technicaldocumentation/technical-data-tables/Derating table FAZ.pdf>