DATASHEET - BC-U-1/8-ECO



ECO Compact distribution board, flush mounting, 1-rows, 8 MU, IP40





Delivery program

| Basic function | | | Basic device |
|--|--------------------------------------|-----------------|--|
| Product function | | | Installation distribution boards |
| Product range | | | ECO DBO |
| Design | | | Flush mounted |
| Installation site | | | Indoor |
| Type of installation | | | Flush mounting |
| Door/Flap | | | Transparent |
| Degree of Protection | | | IP40 |
| Colour | | | White |
| Module rack | | | Single-rail |
| Shroud for protection against accidental contact | | | Plastic |
| Rows | Count | | 1 |
| Module units per row | | | 8 |
| Description | | | IP40 Protection Class II Plastic housing white (RAL 9003) |
| Cable entries | | | Cable entry ribs on top and bottom |
| PE and N terminals design | | | Screw terminals |
| PE and N terminals | Number x cross- sectional area | mm ² | PE: 8 x 10 N: 8 x 10 |
| Equipment supplied | | | Basic device Device support rails Neutral-/protective conductor terminal |

Technical data General

| General | | | |
|--|----|------|------------------------|
| Standards | | | EN 62208_x |
| RoHS (in accordance with Directive 2002/95/EC of the European Parliament and Council) $\label{eq:council}$ | | | conform |
| Ambient temperature | | °C | -20 - +70 |
| Degree of Protection | | | IP40 |
| Protection class | | | II (totally insulated) |
| Rated operational voltage | Ue | V AC | 400 |
| Rated frequency | f | Hz | 50 |
| Material characteristics | | | |
| Material | | | ABS (plastic) |
| Colour | | | white (RAL 9003) |
| Material properties | | | |
| Mechanical | | | |
| Impact resistance | | | IK05 |
| | | | |

Design verification as per IEC/EN 61439

| IEC/EN 61439 design verification | |
|--|--|
| 10.2 Strength of materials and parts | |
| 10.2.2 Corrosion resistance | Meets the product standard's requirements. |
| 10.2.3.1 Verification of thermal stability of enclosures | Meets the product standard's requirements. |
| 10.2.3.2 Verification of resistance of insulating materials to normal heat | Meets the product standard's requirements. |
| 10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects | 850 °C; meets the product standard's requirements. |
| 10.2.4 Resistance to ultra-violet (UV) radiation | Not relevant to indoor installations. |

| 10.2.5 Lifting | Does not apply to enclosures without lifting aids. |
|--|--|
| 10.2.6 Mechanical impact | IK05 |
| 10.2.7 Inscriptions | Meets the product standard's requirements. |
| 10.3 Degree of protection of ASSEMBLIES | IP40 |
| 10.4 Clearances and creepage distances | Is the panel builder's responsibility. |
| 10.5 Protection against electric shock | Protection class 2, therefore not applicable. |
| 10.6 Incorporation of switching devices and components | Is the panel builder's responsibility. |
| 10.7 Internal electrical circuits and connections | Is the panel builder's responsibility. |
| 10.8 Connections for external conductors | Is the panel builder's responsibility. |
| 10.9 Insulation properties | |
| 10.9.2 Power-frequency electric strength | U _i = 400 V AC |
| 10.9.3 Impulse withstand voltage | 3.75 kV |
| 10.9.4 Testing of enclosures made of insulating material | Meets the product standard's requirements. |
| 10.10 Temperature rise | The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices. |
| 10.11 Short-circuit rating | Is the panel builder's responsibility. |
| 10.12 Electromagnetic compatibility | Is the panel builder's responsibility. |
| 10.13 Mechanical function | Meets the product standard's requirements. |


Technical data ETIM 7.0

Distribution boards (EG000023) / Small distribution board (EC000214)

Electric engineering, automation, process control engineering / Electrical installation, device / Electrical distribution system (incl. small distribution board) / Small distribution board (ecl@ss10.0.1-27-14-24-09 [ACN387011])

| Mounting method | | Flush mounted (plaster) |
|-------------------------------------|----|-------------------------|
| Number of rows | | 1 |
| Width in number of modular spacings | | 8 |
| Type of cover | | Door |
| Cover model | | Closed |
| Transparent cover/door | | Yes |
| Material housing | | Plastic |
| Height | mm | 195 |
| Width | mm | 195 |
| Depth | mm | 105 |
| Built-in depth | mm | 70 |
| Internal depth | mm | 98 |
| DIN-rail | | Yes |
| With mounting plate | | No |
| Extension possible | | No |
| EMC-version | | No |
| Colour | | White |
| RAL-number | | 9003 |
| Degree of protection (IP) | | IP40 |
| With lock | | No |
| Type of closure | | Other |
| | | |



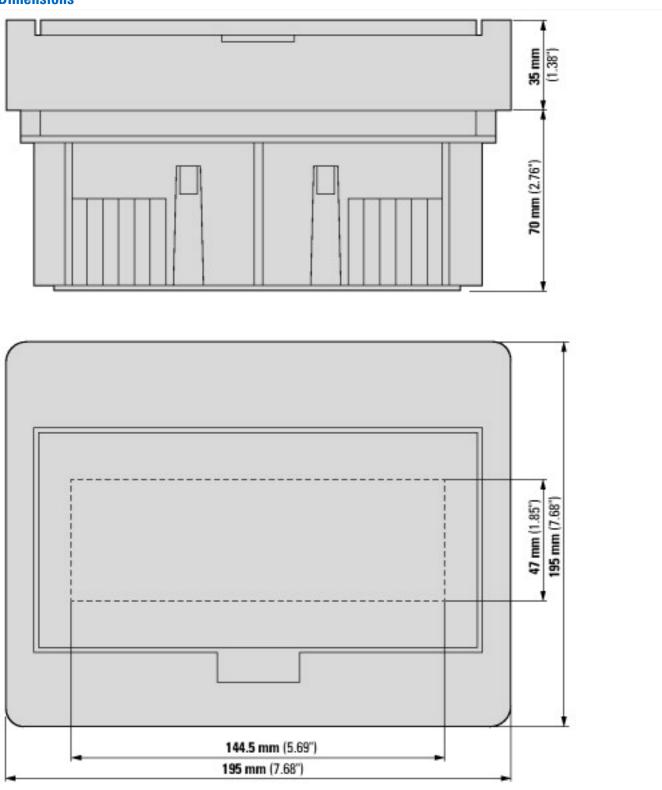

Additional product information (links)

 IL014002Z ECO compact distribution board
 ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL014002ZU2014_02.pdf

 Product overview (Web)
 http://www.eaton.eu/DE/Europe/Electrical/ProductsServices/Residential/index.htm