



Flange, through-hole foam rubber, IP54, HxWxD=116x329x23mm

Part no. **FL4-D**  
 Catalog No. **044879**  
 EL-Nummer (Norway) **2502207**


**Delivery program**

Product range			xEnergy Safety Ci
Basic function			Basic enclosures
Product function			Accessories for basic enclosures
Accessories			Sponge-rubber flange IP54
Single unit/Complete unit			Modular system
Protection type			IP54
For use with enclosure dimensions			375 mm
For use with			NYY, NYM 3 x 1.5 mm <sup>2</sup> - 5 x 2.5 mm <sup>2</sup> NYY, NYM 4 x 4 mm <sup>2</sup> - 5 x 10 mm <sup>2</sup> NYY, NYM 4 x 10 mm <sup>2</sup> - 4 x 50 mm <sup>2</sup>
Outer cable diameter		mm	42 x 10 - 13 4 x 15 - 19 2 x 20 - 30

**Technical data ETIM 7.0**

Distribution boards (EG000023) / Gland plate for small distribution boards/switchgear cabinets (EC000211)			
Electric engineering, automation, process control engineering / Electrical installation, device / Electrical distribution system (incl. small distribution board) / Gland plate for small distribution boards/switchgear cabinets (ecl@ss10.0.1-27-14-24-21 [ADI315007])			
Model			Cable screw gland
Type			Straight
Width		mm	375
Height		mm	120
Depth		mm	23
Material			Plastic
Surface protection			Untreated
Degree of protection (NEMA)			Other
Pre-stamping			Yes
Number of connector holes			0
Thread type			None
Suitable for nominal thread metric/PG			0 - 0

**Dimensions**

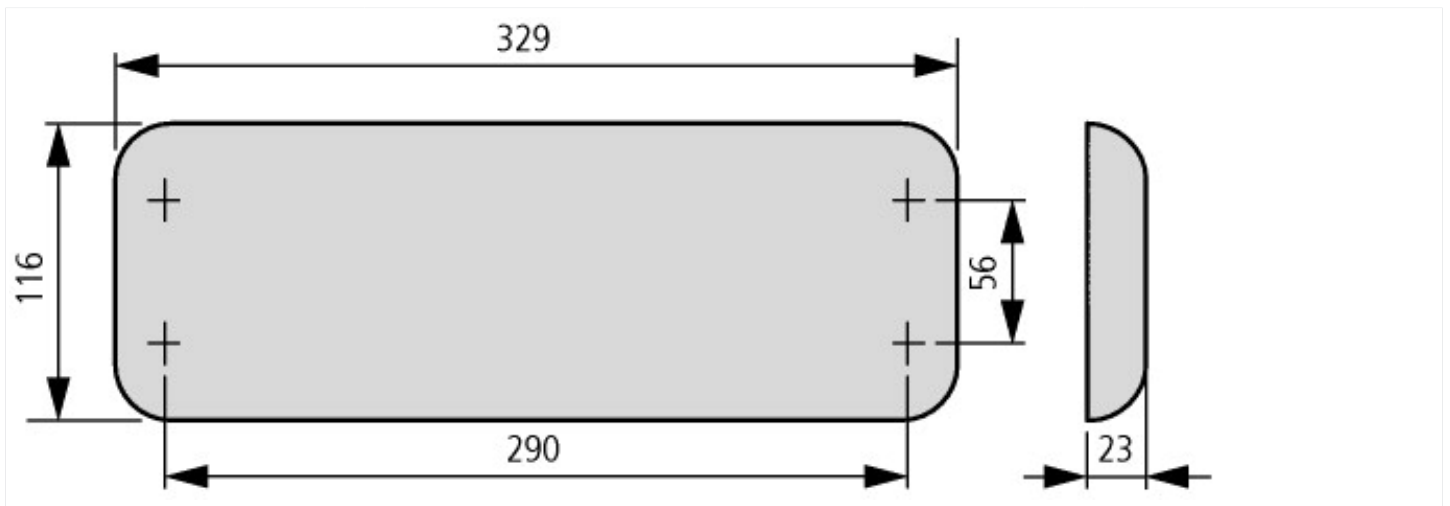

## Additional product information (links)

allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderii model certification xEnergy Safety Ci	<a href="http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;amp">http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;amp</a>
allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderii Save time – we assist you with expert pre-assembly	<a href="http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;amp">http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;amp</a>
allowInterrupt=1&RevisionSelectionMethod=LatestReleased&noSaveAs=0&Renderii product information xEnergy Safety Ci	<a href="http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;amp">http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&amp;amp</a>
tool for calculating the power loss for switching device combinations	<a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/TCTool/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/TCTool/index.htm</a>
configurator - xEnergy family	<a href="http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/xEnergyMainSupport/index.htm">http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/xEnergyMainSupport/index.htm</a>