




Housing, insulated material, for molded-case circuit-breaker NZM2 size,
HxWxD=375x250x225mm




Part no. **MCCB2-200/I43E-200**
Catalog No. **138541**

EL-Nummer **0002502397**
(Norway)

Delivery program

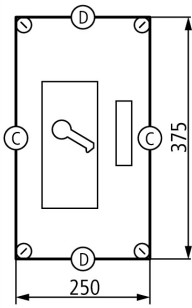Dimensions		mm	
Product range			xEnergy Safety Ci
Basic function			Prepared enclosures
Product function			Enclosures for circuit-breakers, switch-disconnectors
Single unit/Complete unit			Complete housing
Standards			EN 62208 EN 61439-2
Description			For use as individual enclosures (order insulated additional terminal for 4th or 5th pole separately) or in distribution boards Observe the technical data of other equipment when connecting distribution boards Metric cable entry knockouts in all sides Side walls can be knocked out or fitted next to other devices Mounting plate pre-drilled for switches and pre-drilled for a PE and N terminal Mounting plate made from galvanized sheet steel Sealable cover fasteners
Type cover			transparent, smoke gray, pre-drilled for door coupling rotary handle
Degree of Protection			IP65
Information about equipment supplied			With door coupling rotary handle NZM...-XTVD and extension shaft Fixing material for fixing material Including fixing straps for wall mounting can not be combined with remote operator NZM...-XR, plug-in unit NZM...-XSV or withdrawable unit NZM...-XAV
Rated operational voltage	U_e	V AC	690
Width		mm	250
Height		mm	375
Depth		mm	298.5
Rated uninterrupted current	I_u	A	200
For use with			
Basic device			NZM2(-4) N2(-4) PN2(-4) NS2 LZM2(-4) LN2(-4)
Terminals			K50/1 K95/1N... K150/1N...
Basic enclosure			CI43E-200

Notes
C




2 x M50/20

6 x M25/16

8 x M20

D



1 x M50/32

6 x M25/16

Design verification as per IEC/EN 61439


Technical data for design verification			
Heat dissipation, at an ambient temperature of 35°C, delta T: 20 degrees in top of the enclosure, calculated as per IEC 60890			
Individual enclosure for wall mounting	P _V	W	28
Starting enclosure for wall mounting	P _V	W	25
Middle enclosure for wall mounting	P _V	W	22
Heat dissipation, at an ambient temperature of 35°C, delta T: 35 degrees in top of the enclosure, calculated as per IEC 60890			
Individual enclosure for wall mounting	P _V	W	55
Starting enclosure for wall mounting	P _V	W	50
Middle enclosure for wall mounting	P _V	W	45
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			
			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			
			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			
			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			
			Lower part: 960 °C / cover: 850 °C; meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			
			Not relevant to indoor installations.
10.2.5 Lifting			
			10 kg per enclosure with support frame and lifting aid met; assembled and secured as per the latest applicable instruction leaflet.
10.2.6 Mechanical impact			
			IK10
10.2.7 Inscriptions			
			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			
			IP65
10.4 Clearances and creepage distances			
			Is the panel builder's responsibility.
10.5 Protection against electric shock			
			Protection class 2, therefore not applicable.
10.6 Incorporation of switching devices and components			
			Is the panel builder's responsibility.
10.7 Internal electrical circuits and connections			
			Is the panel builder's responsibility.
10.8 Connections for external conductors			
			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			
			U _i = 1000 V AC
10.9.3 Impulse withstand voltage			
			8 kV
10.9.4 Testing of enclosures made of insulating material			
			Meets the product standard's requirements.
10.10 Temperature rise			
			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			
			Is the panel builder's responsibility.
10.12 Electromagnetic compatibility			
			Is the panel builder's responsibility.
10.13 Mechanical function			
			Meets the product standard's requirements.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Empty enclosure for switchgear (EC000712)			
Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Empty housing for switch devices (ecl@ss10.0.1-27-37-13-01 [AKN343014])			
Material housing			Plastic
Width		mm	250
Height		mm	375
Depth		mm	298.5
With transparent cover			Yes
Suitable for emergency stop			Yes
Model			Surface mounting

Degree of protection (IP)		IP65
Degree of protection (NEMA)		Other

Dimensions

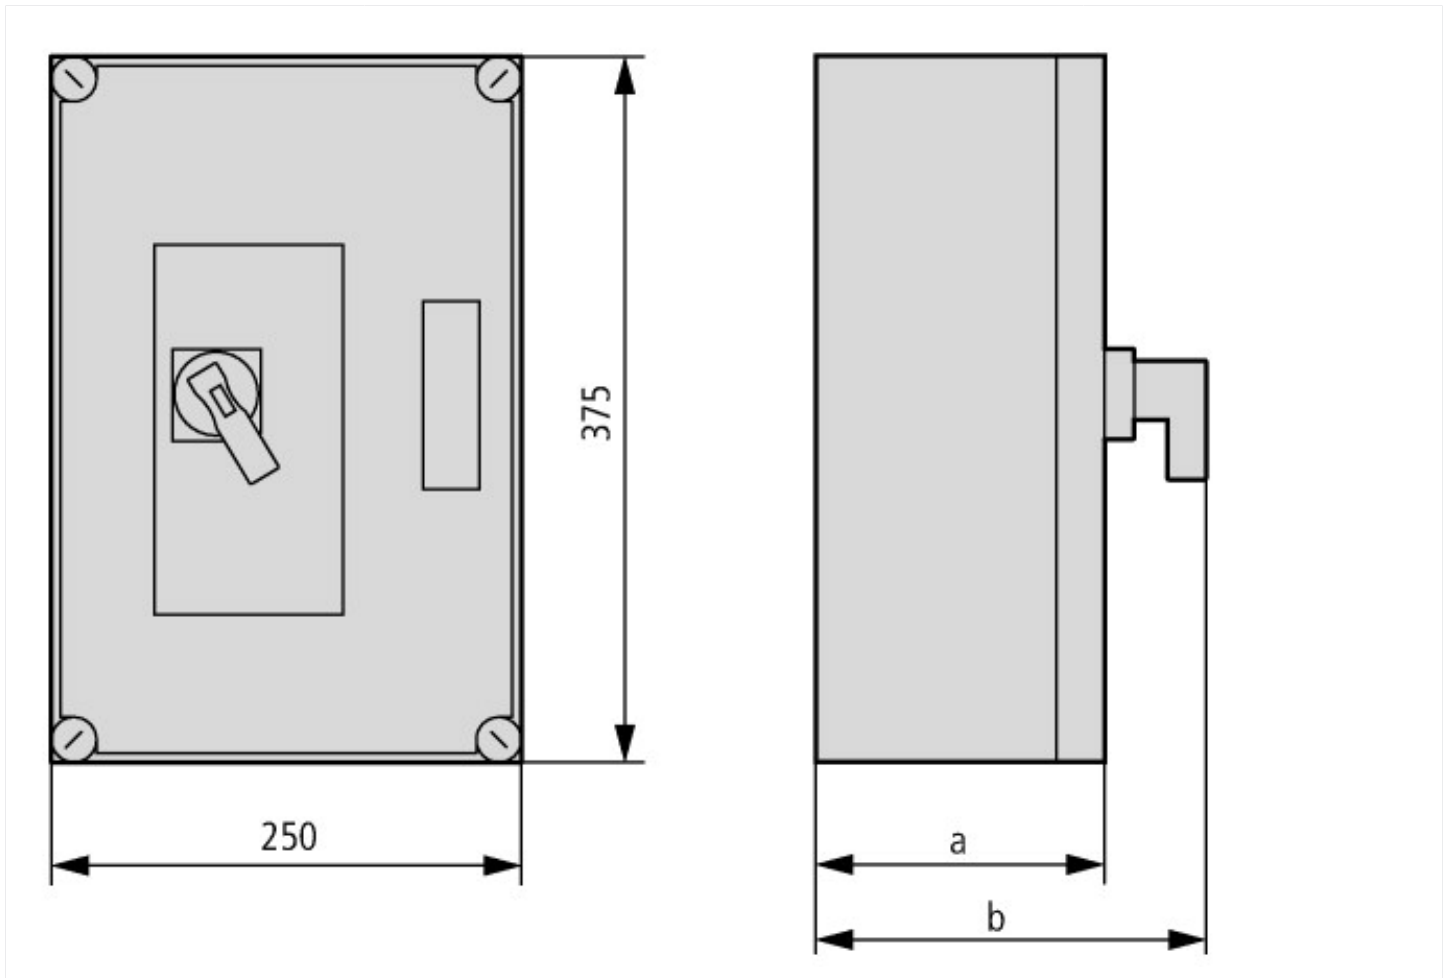

Additional product information (links)

AWA32-567 Ci insulated enclosure

AWA32-567 Ci insulated enclosure	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/05670392.pdf
Manufacturer's Declaration CI-RoHS	https://es-assets.eaton.com/DOCUMENTATION/PDF/2013-01-31_Ci_RoHS.pdf
Declaration of conformity	https://es-assets.eaton.com/DOCUMENTATION/PDF/ci_ce.pdf
allowInterrupt=1&RevisionSelectionMethod=La model certification xEnergy Safety Ci	http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&model certification xEnergy Safety Ci
allowInterrupt=1&RevisionSelectionMethod=La Save time – we assist you with expert pre-assembly	http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&Save time – we assist you with expert pre-assembly
allowInterrupt=1&RevisionSelectionMethod=La product information xEnergy Safety Ci	http://www.eaton.eu/DE/ecm/idcplg?IdcService=GET_FILE&product information xEnergy Safety Ci
tool for calculating the power loss for switching device combinations	http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/TCTool/index.htm
configurator - xEnergy family	http://www.eaton.eu/DE/Europe/Electrical/CustomerSupport/ConfigurationTools/xEnergyMainSupport/index.htm