DATASHEET - DX-EMC12-014-FS1



Radio interference suppression filter, Single-phase, ULN= max. 250 + 10% V, 14 A, For use with: DC1



DX-EMC12-014-FS1 Part no. 172273

Catalog No.

Alternate Catalog

DX-EMC12-014-FS1

No.

EL-Nummer 4110034

(Norway)

Delivery program

71 0			
Description			Single-phase
Mains voltage (50/60Hz)	U_{LN}	V	max. 250 + 10%
Rated operational current	l _e	Α	14
For use with			DC1
Degree of Protection			IP00 IP20 when connected
Connection type			Connection terminal, PE stud, prefabricated cables
Weight	m	kg	0,8
Notes			Base-mounted filter, side-mounting filter

IP00 IP20 when connected

Technical data General

Degree of Protection

Standards			EN 50178, IEC 61800-3, EN 61800-3 incl. A11
Environment	al conditions		
Altitude		m	Up to 2000 m a.s.l.; observe derating at higher altitudes

Design verification as per IEC/EN 61439

Design verification as per IEC/EN 61439	
Technical data for design verification	
Degree of Protection	IP20
IEC/EN 61439 design verification	
10.2 Strength of materials and parts	
10.2.2 Corrosion resistance	Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures	Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat	Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects	Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation	Meets the product standard's requirements.
10.2.5 Lifting	Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact	Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions	Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES	Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances	Meets the product standard's requirements.
10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.

10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction


Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Accessories for frequency controller (EC002025)

Electric engineering, automation, process control engineering / Electrical drive / Static frequency converter / Static frequency converter (accessory) (ecl@ss10.0.1-27-02-31-92 [AFR303003])

Type of accessory Filter

Dimensions

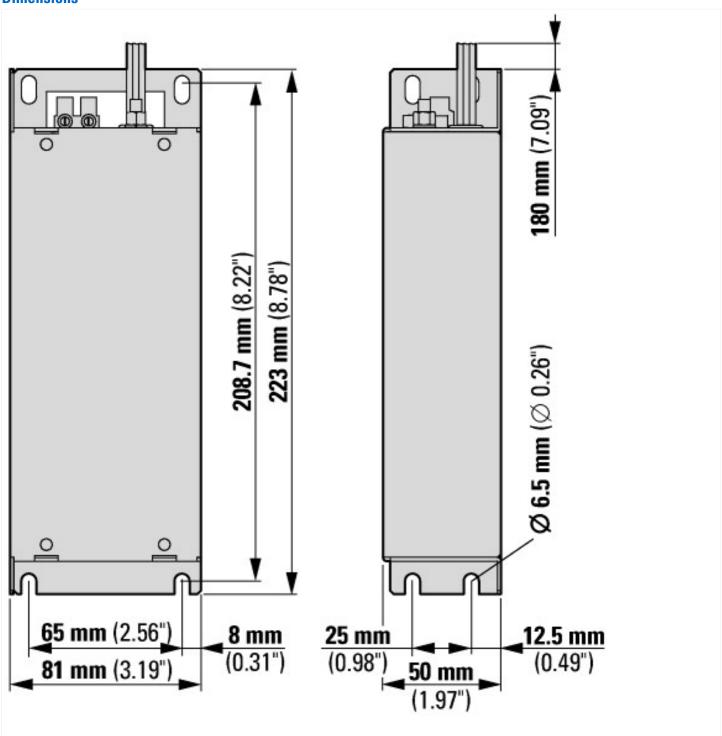

Additional product information (links)

· · · · · · · · · · · · · · · · · · ·	
IL04012017Z*.pdf EMC filter	
IL04012017Z*.pdf EMC filter	https://es-assets.eaton.com/DOCUMENTATION/AWA_INSTRUCTIONS/IL04012017Z2020_07.pdf
CA04020001Z-EN Product Range Catalog: Efficient Engineering for Starting and Controlling Motors	http://www.eaton.eu/DE/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1095238.pdf