DATASHEET - DX-EMC34-130



Radio interference suppression filter, three-phase, ULN= max. 520 + 10% V, 130 A, For use with: DA1

Powering Business Worldwide*

Part no. DX-EMC34-130 Catalog No. 172286

Alternate Catalog DX-EMC34-130

No

EL-Nummer 4110047

(Norway)

Delivery program

Description			three-phase
Mains voltage (50/60Hz)	U_{LN}	V	max. 520 + 10%
Rated operational current	l _e	Α	130
For use with			DA1
Degree of Protection			IP20
Connection type			Screw terminal, PE stud
Weight	m	kg	5,6
Notes			Separate mounting

Technical data

General

Standards			EN 50178, IEC 61800-3, EN 61800-3 incl. A11
Environmental conditions			
Altitude	n	n	Up to 2000 m a.s.l.; observe derating at higher altitudes
Degree of Protection			IP20
Rating data for approved types			
Short Circuit Current Rating	S	SCCR	
High fault rating	k	κA	100

Design verification as per IEC/EN 61439

Technical data for design verification Rated operational current for specified heat dissipation In A 130 Heat dissipation per pole, current-dependent Pvid W 90 Equipment heat dissipation, current-dependent Pvid W 90 Static heat dissipation, non-current-dependent Pvs W 0 Heat dissipation capacity Pdiss W 0 Operating ambient temperature min. C 25 Operating ambient temperature max.			
Heat dissipation per pole, current-dependent P _{vid} W 90 Static heat dissipation, non-current-dependent P _{vs} W 0 Heat dissipation capacity P _{diss} W 0 Operating ambient temperature min.	esign verification		
Equipment heat dissipation, current-dependent P_{vid} W 90 Static heat dissipation, non-current-dependent P_{vs} W 0 Heat dissipation capacity P_{diss} W 0 Operating ambient temperature min. °C -25	al current for specified heat dissipation	I _n A	130
Static heat dissipation, non-current-dependent P_{vs} W 0 Heat dissipation capacity P_{diss} W 0 Operating ambient temperature min. C C C C	per pole, current-dependent	P _{vid} W	0
Heat dissipation capacity Pdiss W 0 Operating ambient temperature min. °C -25	dissipation, current-dependent	P _{vid} W	90
Operating ambient temperature min. °C -25	pation, non-current-dependent	P _{vs} W	0
	capacity	P _{diss} W	0
Operating ambient temperature max. °C 50	ent temperature min.	°C	-25
	ent temperature max.	°C	50
Degree of Protection IP20	ction		IP20
IEC/EN 61439 design verification	ı verification		
10.2 Strength of materials and parts	materials and parts		
10.2.2 Corrosion resistance Meets the product standard's requirements.	sion resistance		Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures Meets the product standard's requirements.	ication of thermal stability of enclosures		Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat Meets the product standard's requirements.	ication of resistance of insulating materials to normal heat		Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects Meets the product standard's requirements.			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation Meets the product standard's requirements.	ance to ultra-violet (UV) radiation		Meets the product standard's requirements.
10.2.5 Lifting Does not apply, since the entire switchgear needs to be evaluated.			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact Does not apply, since the entire switchgear needs to be evaluated.	anical impact		Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions Meets the product standard's requirements.	otions		Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES Does not apply, since the entire switchgear needs to be evaluated.	rotection of ASSEMBLIES		Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances Meets the product standard's requirements.	and creepage distances		Meets the product standard's requirements.

10.5 Protection against electric shock	Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components	Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections	Is the panel builder's responsibility.
10.8 Connections for external conductors	Is the panel builder's responsibility.
10.9 Insulation properties	
10.9.2 Power-frequency electric strength	Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage	Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material	Is the panel builder's responsibility.
10.10 Temperature rise	The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility	Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.13 Mechanical function	The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

Technical data ETIM 7.0

Low-voltage industrial components (EG000017) / Accessories for frequency controller (EC002025)


Electric engineering, automation, process control engineering / Electrical drive / Static frequency converter / Static frequency converter (accessory) (ecl@ss10.0.1-27-02-31-92 [AFR303003])

Type of accessory Filter

Approvals

• •	
Product Standards	UL 1283
UL File No.	E192040
North America Certification	UL listed, certified by UL for use in Canada

Dimensions

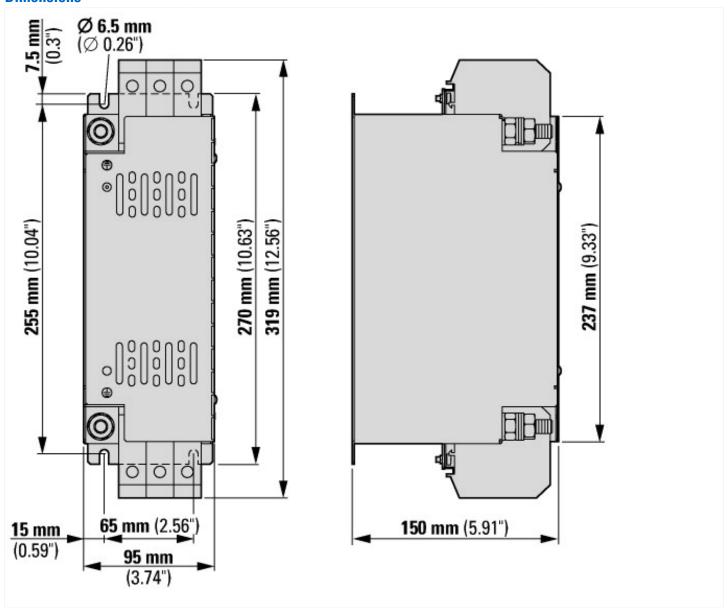

Additional product information (links)

 ${\bf CA04020001Z\text{-}EN\ Product\ Range\ Catalog:\ Efficient\ Engineering\ for\ Starting\ and\ Controlling\ Motors}$

 $http://www.eaton.eu/DE/ecm/groups/public/@pub/@europe/@electrical/documents/content/pct_1095238.pdf$