



Cassette 2000A, IZMX404 m. control cable connection



Part no. IZMX-CAS404-2000-SEC-1
Catalog No. 183959
Alternate Catalog No. 67C2762A51
EL-Nummer (Norway) 4398368

Delivery program

| | | | |
|--------------------------------------|-------|---|---|
| Product range | | | Accessories |
| Accessories | | | Withdrawable units |
| Accessories | | | Cassettes |
| | | | Equipment supplied: arcing chamber cover, terminal blocks fully populated |
| Rated current | I_n | A | 2000 |
| Pole | | | 4 |
| For use with | | | IZMX40...4-...W INX40...4-...W |
| Instructions | | | With control conductor terminals fully fitted. |
| Information about equipment supplied | | | with arcing chamber cover |
| | | | Control circuit terminal |
| Installation type | | | Withdrawable |


Design verification as per IEC/EN 61439

| | | | |
|--|--|----|-----|
| Technical data for design verification | | | |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 70 |

Technical data ETIM 7.0

| | | | |
|---|--|---|-----------------|
| Low-voltage industrial components (EG000017) / Chassis part power circuit breaker (EC002043) | | | |
| Electric engineering, automation, process control engineering / Low-voltage switch technology / Circuit breaker (LV < 1 kV) / Chassis part circuit breaker (ecl@ss10.0.1-27-37-04-22 [ACN955011]) | | | |
| Rated current I_n | | A | 2000 |
| Number of poles | | | 4 |
| Version as busbar adapter | | | No |
| Version as built-in device | | | Yes |
| Type of electrical connection of main circuit | | | Rail connection |

Dimensions

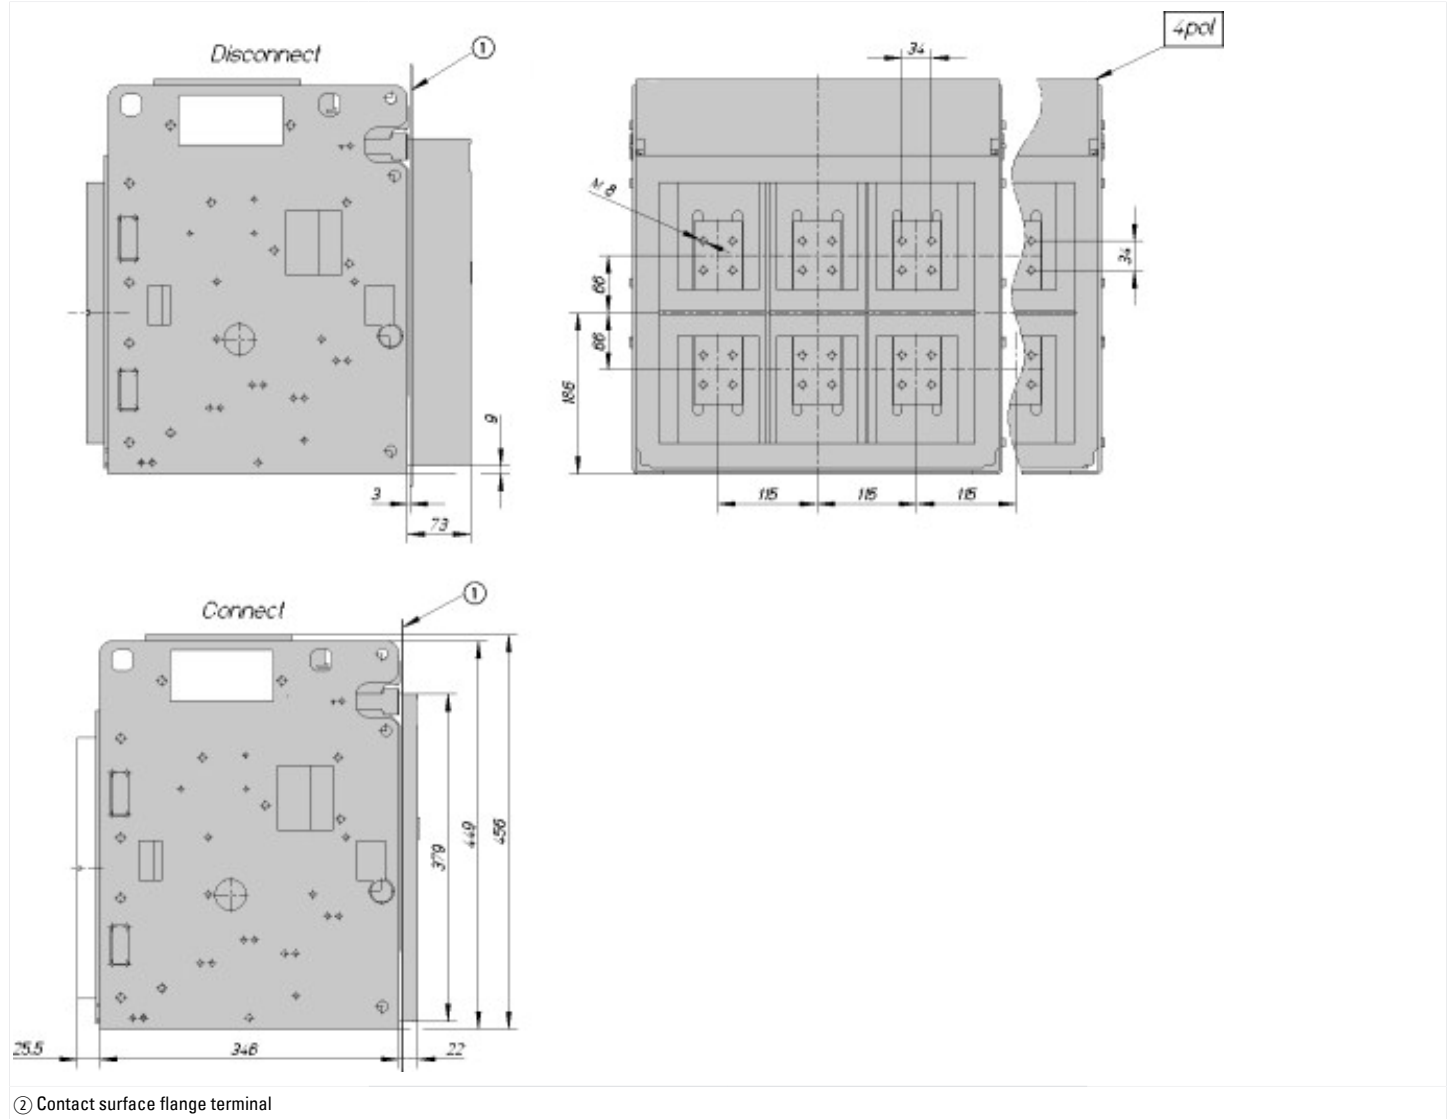

② Contact surface flange terminal