#### **DATASHEET - CI-K2-PKZ0-GV**



#### Insulated enclosure, for PKZO, +rotary handle, black/grey

CI-K2-PKZ0-GV 219657

Alternate Catalog XTPAXENCSEM65B

Part no.

Catalog No.



# **Delivery program**

Product range	Accessories				
Subrange	Surface mounting enclosures				
Accessories	Insulated enclosures for PKZ				
	with black-grey rotary knob				
Degree of Protection	IP65				
For use with	+NHI or AGM +U or A +L-PKZ0 (2 off)				
Notes With integrated N and PE terminal. In each case 2 metric M25 cable entry knockouts top and bottom. Additional cable insertion membrane as cable entry gland: 2 x in the rear wall and 1 x at the bottom.					

# IEC/EN 61/120

Design verification as per IEC/EN 61439			
Technical data for design verification			
Rated operational current for specified heat dissipation	In	Α	0
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	0
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	0
Heat dissipation capacity	P <sub>diss</sub>	W	12.5
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	70
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance			Meets the product standard's requirements.
10.2.3.1 Verification of thermal stability of enclosures			Meets the product standard's requirements.
10.2.3.2 Verification of resistance of insulating materials to normal heat			Meets the product standard's requirements.
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects			Meets the product standard's requirements.
10.2.4 Resistance to ultra-violet (UV) radiation			Please enquire
10.2.5 Lifting			Does not apply, since the entire switchgear needs to be evaluated.
10.2.6 Mechanical impact			Does not apply, since the entire switchgear needs to be evaluated.
10.2.7 Inscriptions			Meets the product standard's requirements.
10.3 Degree of protection of ASSEMBLIES			Does not apply, since the entire switchgear needs to be evaluated.
10.4 Clearances and creepage distances			Meets the product standard's requirements.
10.5 Protection against electric shock			Does not apply, since the entire switchgear needs to be evaluated.
10.6 Incorporation of switching devices and components			Does not apply, since the entire switchgear needs to be evaluated.
10.7 Internal electrical circuits and connections			Is the panel builder's responsibility.
10.8 Connections for external conductors			Is the panel builder's responsibility.
10.9 Insulation properties			
10.9.2 Power-frequency electric strength			Is the panel builder's responsibility.
10.9.3 Impulse withstand voltage			Is the panel builder's responsibility.
10.9.4 Testing of enclosures made of insulating material			Is the panel builder's responsibility.
10.10 Temperature rise			The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.
10.11 Short-circuit rating			Is the panel builder's responsibility. The specifications for the switchgear must be observed.
10.12 Electromagnetic compatibility			Is the panel builder's responsibility. The specifications for the switch gear must be observed.

## **Technical data ETIM 7.0**

Low-voltage industrial components (EG000017) / Empty enclosure for switchgear (EC000712)


Electric engineering, automation, process control engineering / Low-voltage switch technology / Component for low-voltage switching technology / Empty housing for switch devices (ecl@ss10.0.1-27-37-13-01 [AKN343014])


	Plastic
mm	100
mm	160
mm	130
	No
	No
	Surface mounting
	IP65
	Other
	mm

## **Approvals**

Specially designed for North America No

#### **Dimensions**

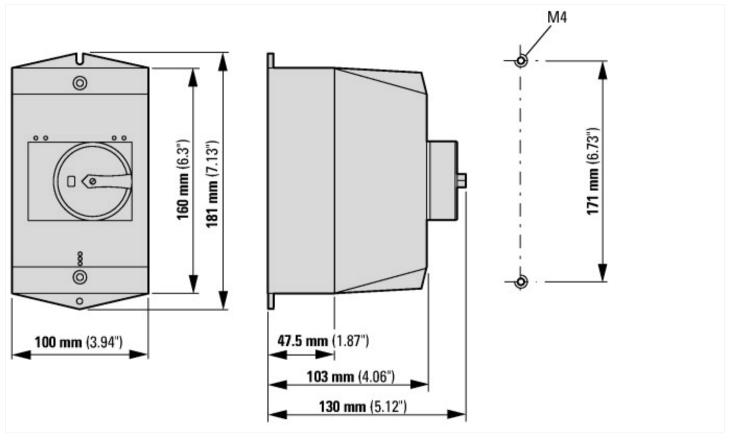

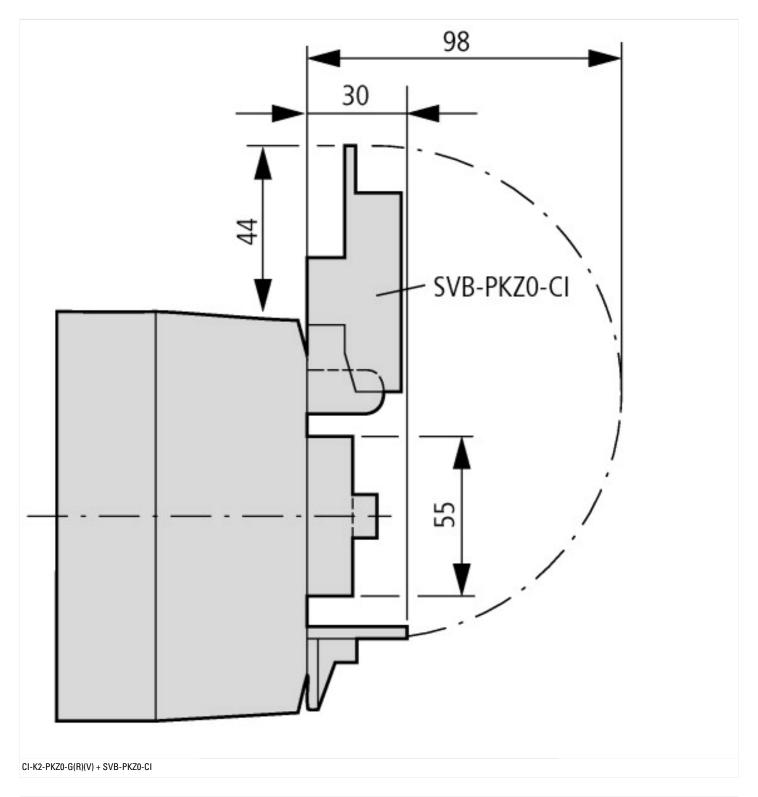

### **Additional product information (links)**

Motor starters and "Special Purpose Ratings" for the North American market
Busbar Component Adapters for modern Industrial control panels