

# DATASHEET - EASY819-AC-RC



**Control relay, 100-240VAC, 12DI, 6DO relays, display, time, expandable, easyNet**

**EATON**  
Powering Business Worldwide™

**Part no.** **EASY819-AC-RC**

**Catalog No.** **256267**

**EL-Nummer  
(Norway)** **4520973**

## Delivery program

Basic function		easy800 (expandable, easyNet)
Description		Expandable: Digital/analog inputs/outputs and AS-Interface, PROFIBUS-DP, CANopen®, DeviceNet bus systems Bus system easyNet on board customized laser inscription or delivery with user program possible with EASY-COMBINATION.* product (article No. 2010781)
<b>Inputs</b>		
Digital	12	
<b>Outputs</b>		
Quantity of outputs	Relays: 6	
Outputs	Number 6	
<b>Additional features</b>		
Real time clock	#	
Display & keypad	#	
Expansions	Expandable Networkable (easyNet)	
Supply voltage	100 - 240 V AC	
Software	EASY-SOFT-PRO	

## Technical data

<b>General</b>			
Standards		EN 55011, EN 55022, IEC/EN 61000-4, IEC 60068-2-6, IEC 60068-2-27	
Approvals		CSA UL EAC	
Dimensions (W x H x D)	mm	107.5 x 90 x 72 (6 PE)	
Weight	kg	0.3	
Mounting		Top-hat rail IEC/EN 60715, 35 mm or screw fixing using fixing brackets ZB4-101-GF1 (accessories)	

## Terminal capacities


Solid	mm <sup>2</sup>	0.2/4 (AWG 22 - 12)
Flexible with ferrule	mm <sup>2</sup>	0.2/2.5 (AWG 22 - 12)
Standard screwdriver	mm	0.8 x 3.5
Max. tightening torque	Nm	0.6

## Climatic environmental conditions

Operating ambient temperature	°C	In accordance with IEC 60068-2-1, -25 - +55
Condensation		Take appropriate measures to prevent condensation
LCD display (clearly legible)	°C	0 - 55
Storage	θ °C	In accordance with IEC 60068-2-1, -2, -14 -40 - +70
relative humidity	%	in accordance with IEC 60068-2-30, IEC 60068-2-78 5 - 95
Air pressure (operation)	hPa	795 - 1080

## Ambient conditions, mechanical

Protection type (IEC/EN 60529, EN50178, VBG 4)		IP20
Vibrations	Hz	In accordance with IEC 60068-2-6 constant amplitude 0.15 mm: 10 - 57 constant acceleration 2 g: 57 - 150
Mechanical shock resistance (IEC/EN 60068-2-27) semi-sinusoidal 15 g/11 ms	Impacts	18
Drop to IEC/EN 60068-2-31	Drop height mm	50

Free fall, packaged (IEC/EN 60068-2-32)	m	1	
Mounting position		Vertical or horizontal	
<b>Electromagnetic compatibility (EMC)</b>			
Overtoltage category/pollution degree		III/2	
Electrostatic discharge (ESD) applied standard		according to IEC EN 61000-4-2	
Air discharge	kV	8	
Contact discharge	kV	6	
Electromagnetic fields (RFI) to IEC EN 61000-4-3	V/m	0.8 - 1.0 GHz: 10 1.4 - 2 GHz: 3 2.0 - 2.7 GHz: 1	
Radio interference suppression		EN 55011 Class B	
Burst	kV	according to IEC/EN 61000-4-4	
power pulses (Surge)		according to IEC/EN 61000-4-5 1 kV (supply cables, symmetrical)	
Immunity to line-conducted interference to (IEC/EN 61000-4-6)	V	10	
<b>Insulation resistance</b>			
Clearance in air and creepage distances		EN 50178, UL 508, CSA C22.2, No. 142	
Insulation resistance		EN 50178	
<b>Back-up of real-time clock</b>			
Back-up of real-time clock			
		① Backup time (hours) with fully charged double layer capacitor ② Service life (years)	
Accuracy of real-time clock to inputs	s/day	typ. ± 2 (± 0.2 h/year)  depending on ambient air temperature fluctuations of up to ± 5 s/day (± 0.5 h/year) are possible	
<b>Repetition accuracy of timing relays</b>			
Accuracy of timing relays (of values)	%	± 0.02	
Resolution			
Range "S"	ms	5	
Range "M:S"	s	1	
Range "H:M"	min	1	
<b>Retentive memory</b>			
Write cycles of the retentive memory		10 <sup>12</sup> (read/write cycles)	
<b>Power supply</b>			
Rated operational voltage	U <sub>e</sub>	V	100/110/115/120/230/240 AC (-15/+10%)
Permissible range	U <sub>e</sub>		85 - 264 V AC
Frequency		Hz	50/60 (± 5%)
Input current			normally 70 mA at 115/120 V AC 60 Hz normally 35 mA at 230/240 V AC 50 Hz
Voltage dips		ms	≤ In accordance with IEC 61131-2 ≤ 20
Fuse		A	≥ 1A (T)
Power loss	P	W	Normally 10
<b>Digital inputs 24 V AC</b>			
Status Display		LCD-Display	
<b>Digital inputs 115/230 V AC</b>			
Number		12	
Status Display		LCD-Display	
Potential isolation			from power supply: no between digital inputs: no from the outputs: yes to the interface: yes to easyNet: yes to easyLink: yes
Input voltage (sinusoidal)	U <sub>e</sub>	V AC	Signal 0: 0 - 40 Signal 1: 79 - 264
Rated frequency		Hz	50/60
Input current at signal 1		mA	I1 - I6, I9 - I12: 10 x 0.25 (at 115 V AC, 60 Hz) I7, I8: 2 x 4 (at 115 V AC, 60 Hz) I1 - I6, I9 - I12: 10 x 0.5 (at 230 V AC, 50 Hz)

			I7, I8: 2 x 6 (at 230 V AC, 50 Hz)
Deceleration time	ms	80.66% (0 -> 1/1 -> 0, debounce ON 50/60Hz, I1 - I6, I9 - I12) 20.16% (0 -> 1/1 -> 0, debounce OFF 50/60Hz, I1 - I6, I9 - I12) 120/100 (1 -> 0, debounce ON 50/60Hz, I7, I8) 40.33% (1 -> 0, debounce OFF 50/60Hz, I7, I8) 80.66% (0 -> 1, debounce ON 50/60Hz, I7, I8) 20.16% (0 -> 1, debounce OFF 50/60Hz, I7, I8)	
Cable length	m	≤ 100 per input (I1 - I6, I9 - I12, Debounce ON) ≤ 60 per input (I1 - I6, I9 - I12, Debounce OFF) ≤ 100 per input (I7, I8)	
<b>Relay outputs</b>			
Number		6	
Outputs in groups of		1	
Parallel switching of outputs for increased output		Not permissible	
Protection of an output relay		Miniature circuit-breaker B16 or fuse 8 A (slow)	
Potential isolation		from power supply: yes From the inputs: yes between digital inputs: yes to the interface: yes to easyLink: yes to easyNet: yes Safe isolation according to EN 50178: 300 V AC Basic isolation: 600 V AC	
Lifespan, mechanical	Operations	x 10 <sup>6</sup>	10
Contacts			
Conventional thermal current (10 A UL)	A	8	
Recommended for load: 12 V AC/DC	mA	> 500	
Short-circuit-proof cos φ = 1, characteristic B16 at 600 A	A	16	
Short-circuit-proof cos φ = 0.5 to 0.7, characteristic B16 at 900 A	A	16	
Rated impulse withstand voltage U <sub>imp</sub> of contact coil	kV	6	
Rated operational voltage	U <sub>e</sub>	V AC	250
Rated insulation voltage	U <sub>i</sub>	V AC	250
Safe isolation according to EN 50178		V AC	300 between coil and contact 300 between two contacts
Making capacity			
AC-15, 250 V AC, 3 A (600 ops./h)	Operations	300000	
DC-13, L/R ≤ 150 ms, 24 V DC, 1 A (500 S/h)	Operations	200000	
Breaking capacity			
AC-15, 250 V AC, 3 A (600 Ops./h)	Operations	300000	
DC-13, L/R ≤ 150 ms, 24 V DC, 1 A (500 S/h)	Operations	200000	
Filament bulb load			
1000 W at 230/240 V AC	Operations	25000	
500 W at 115/120 V AC	Operations	25000	
Fluorescent lamp load			
Fluorescent lamp load 10 x 58 W at 230/240 V AC			
With upstream electrical device	Operations	25000	
Uncompensated	Operations	25000	
Fluorescent lamp load 1 x 58 W at 230/240 V AC, conventional, compensated	Operations	25000	
Switching frequency			
Mechanical operations		x 10 <sup>6</sup>	10
Switching frequency		Hz	10
Resistive load/lamp load		Hz	2
Inductive load		Hz	0.5
UL/CSA			
Uninterrupted current at 240 V AC	A	10	
Uninterrupted current at 24 V DC	A	8	
AC			
Control Circuit Rating Codes (utilization category)			B 300 Light Pilot Duty
Max. rated operational voltage	V AC	300	
max. thermal continuous current cos φ = 1 at B 300	A	5	
max. make/break cos φ ≠ capacity 1 at B 300	VA	3600/360	

DC			
Control Circuit Rating Codes (utilization category)		R 300 Light Pilot Duty	
Max. rated operational voltage		V DC	300
Max. thermal uninterrupted current at R 300		A	1
Max. make/break capacity at R 300		VA	28/28
Supply voltage $U_{Aux}$			
Power loss	P	W	10
Network easyNet			
Data transfer rate/distance		1000 KBit/s, 6 m 500 KBit/s, 25 m 250 Kbit/s, 40 m 125 Kbit/s, 300 m 50 KBit/s, 300 m 20 KBit/s, 700 m 10 KBit/s, 1000 m Lengths from 40 m can be obtained only with cables with reinforced cross-section and terminal adapter.	
Potential isolation		from power supply POW: yes From the inputs: yes from the outputs: yes to easyLink: yes to the interface: yes	
Bus termination (first and last station)		yes	
Terminal types		RJ45, 8-polig	
Terminal capacity		up to 1000 m, < 16 mΩ/m: 1.5 (AWG: 16) up to 600 m, < 26 mΩ/m: 0.75 - 0.8 (AWG: 18) up to 400 m, < 40 mΩ/m: 0.5 - 0.6 (AWG: 20, 19) up to 250 m, < 60 mΩ/m: 0.34 - 0.5 (AWG: 22, 21, 20) up to 175 m, < 70 mΩ/m: 0.25 - 0.34 (AWG: 23, 22) up to 40 m, < 140 mΩ/m: 0.13 (AWG: 26)	

## Design verification as per IEC/EN 61439

Technical data for design verification			
Rated operational current for specified heat dissipation	I <sub>n</sub>	A	0
Heat dissipation per pole, current-dependent	P <sub>vid</sub>	W	0
Equipment heat dissipation, current-dependent	P <sub>vid</sub>	W	0
Static heat dissipation, non-current-dependent	P <sub>vs</sub>	W	10
Heat dissipation capacity	P <sub>diss</sub>	W	0
Operating ambient temperature min.		°C	-25
Operating ambient temperature max.		°C	55
IEC/EN 61439 design verification			
10.2 Strength of materials and parts			
10.2.2 Corrosion resistance		Meets the product standard's requirements.	
10.2.3.1 Verification of thermal stability of enclosures		Meets the product standard's requirements.	
10.2.3.2 Verification of resistance of insulating materials to normal heat		Meets the product standard's requirements.	
10.2.3.3 Verification of resistance of insulating materials to abnormal heat and fire due to internal electric effects		Meets the product standard's requirements.	
10.2.4 Resistance to ultra-violet (UV) radiation		Meets the product standard's requirements.	
10.2.5 Lifting		Does not apply, since the entire switchgear needs to be evaluated.	
10.2.6 Mechanical impact		Does not apply, since the entire switchgear needs to be evaluated.	
10.2.7 Inscriptions		Meets the product standard's requirements.	
10.3 Degree of protection of ASSEMBLIES		Meets the product standard's requirements.	
10.4 Clearances and creepage distances		Meets the product standard's requirements.	
10.5 Protection against electric shock		Does not apply, since the entire switchgear needs to be evaluated.	
10.6 Incorporation of switching devices and components		Does not apply, since the entire switchgear needs to be evaluated.	
10.7 Internal electrical circuits and connections		Is the panel builder's responsibility.	
10.8 Connections for external conductors		Is the panel builder's responsibility.	
10.9 Insulation properties			
10.9.2 Power-frequency electric strength		Is the panel builder's responsibility.	
10.9.3 Impulse withstand voltage		Is the panel builder's responsibility.	
10.9.4 Testing of enclosures made of insulating material		Is the panel builder's responsibility.	
10.10 Temperature rise		The panel builder is responsible for the temperature rise calculation. Eaton will provide heat dissipation data for the devices.	

10.11 Short-circuit rating		Is the panel builder's responsibility.
10.12 Electromagnetic compatibility		Is the panel builder's responsibility.
10.13 Mechanical function		The device meets the requirements, provided the information in the instruction leaflet (IL) is observed.

## Technical data ETIM 7.0


PLC's (EG000024) / Logic module (EC001417)		
Electric engineering, automation, process control engineering / Control / Programmable logic control (SPS) / Logic module (ecl@ss10.0.1-27-24-22-16 [AKE539014])		
Supply voltage AC 50 Hz	V	85 - 264
Supply voltage AC 60 Hz	V	85 - 264
Supply voltage DC	V	0 - 0
Voltage type of supply voltage		AC
Switching current	A	8
Number of analogue inputs		0
Number of analogue outputs		0
Number of digital inputs		12
Number of digital outputs		6
With relay output		Yes
Number of HW-interfaces industrial Ethernet		0
Number of interfaces PROFINET		0
Number of HW-interfaces RS-232		0
Number of HW-interfaces RS-422		0
Number of HW-interfaces RS-485		0
Number of HW-interfaces serial TTY		0
Number of HW-interfaces USB		0
Number of HW-interfaces parallel		0
Number of HW-interfaces Wireless		0
Number of HW-interfaces other		3
With optical interface		No
Supporting protocol for TCP/IP		No
Supporting protocol for PROFIBUS		No
Supporting protocol for CAN		No
Supporting protocol for INTERBUS		No
Supporting protocol for ASI		No
Supporting protocol for KNX		No
Supporting protocol for MODBUS		No
Supporting protocol for Data-Highway		No
Supporting protocol for DeviceNet		No
Supporting protocol for SUCONET		No
Supporting protocol for LON		No
Supporting protocol for PROFINET IO		No
Supporting protocol for PROFINET CBA		No
Supporting protocol for SERCOS		No
Supporting protocol for Foundation Fieldbus		No
Supporting protocol for EtherNet/IP		No
Supporting protocol for AS-Interface Safety at Work		No
Supporting protocol for DeviceNet Safety		No
Supporting protocol for INTERBUS-Safety		No
Supporting protocol for PROFIsafe		No
Supporting protocol for SafetyBUS p		No
Supporting protocol for other bus systems		Yes
Radio standard Bluetooth		No
Radio standard WLAN 802.11		No
Radio standard GPRS		No
Radio standard GSM		No
Radio standard UMTS		No

IO link master	No
Redundancy	No
With display	Yes
Degree of protection (IP)	IP20
Basic device	Yes
Expandable	Yes
Expansion device	No
With timer	Yes
Rail mounting possible	Yes
Wall mounting/direct mounting	Yes
Front build in possible	No
Rack-assembly possible	No
Suitable for safety functions	No
Category according to EN 954-1	None
SIL according to IEC 61508	None
Performance level acc. EN ISO 13849-1	None
Appendant operation agent (Ex ia)	No
Appendant operation agent (Ex ib)	No
Explosion safety category for gas	None
Explosion safety category for dust	None
Width	mm 107.5
Height	mm 90
Depth	mm 72

## Approvals

Product Standards	IEC/EN see Technical Data; UL 508; CSA C22.2 No. 142-M1987; CSA C22.2 No. 213-M1987; CE marking
UL File No.	E135462
UL Category Control No.	NRAQ
CSA File No.	012528
CSA Class No.	2252-01 + 2258-02
North America Certification	UL listed, CSA certified
Degree of Protection	IEC: IP20, UL/CSA Type: -

## Dimensions

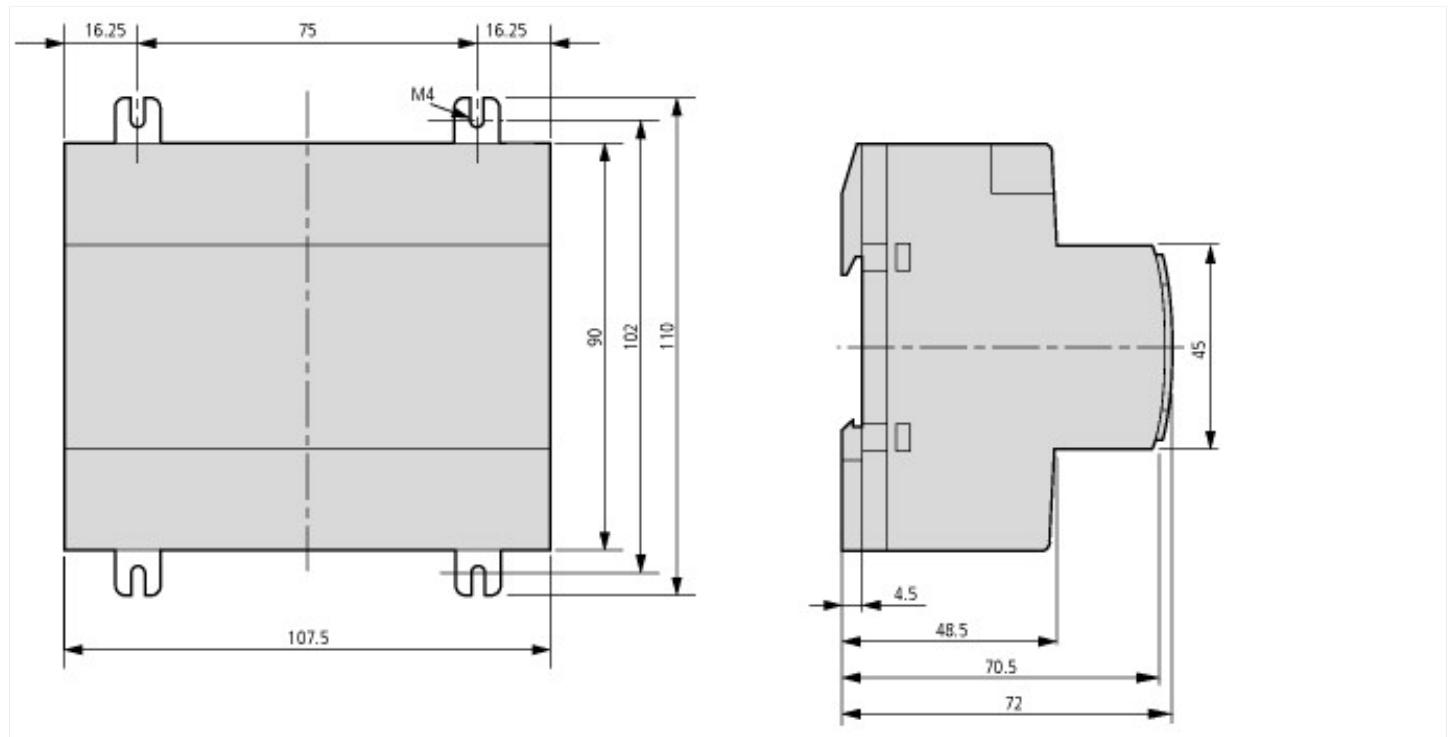

## Assets (links)

### Declaration of CE Conformity

00003063

### Instruction Leaflets

IL05013012Z2018\_02

### Manuals

MN04902001Z\_EN (English)

## Additional product information (links)

### Instruction leaflet "easy control relays" IL05013012Z (AWA2528-1979)

Instruction leaflet "easy control relays" IL05013012Z (AWA2528-1979)	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05013012Z2010_11.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05013012Z2010_11.pdf</a>
---	---

Instruction leaflet "easy control relays" IL05013012Z (AWA2528-1979)	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05013012Z2018_02.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWA_INSTRUCTIONS/IL05013012Z2018_02.pdf</a>
---	---

### Manual "easy800 control relays" MN04902001Z (AWB2528-1423)

Handbuch „Steuerrelais easy800“ MN04902001Z (AWB2528-1423) - Deutsch	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04902001Z_DE.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04902001Z_DE.pdf</a>
---	---

Manual "easy800 control relays" MN04902001Z (AWB2528-1423) - English	<a href="ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04902001Z_EN.pdf">ftp://ftp.moeller.net/DOCUMENTATION/AWB_MANUALS/MN04902001Z_EN.pdf</a>
---	---

f1=1454&f2=1174&f3=1718;Download Software easySoft V6	<a href="http://applications.eaton.eu/sdlc?LX=11&amp;amp">http://applications.eaton.eu/sdlc?LX=11&amp;amp</a>
--	---

f1=1454&f2=1179;Labeleditor	<a href="http://applications.eaton.eu/sdlc?LX=11&amp;amp">http://applications.eaton.eu/sdlc?LX=11&amp;amp</a>
-----------------------------	---