



Fuse link without blink application with D02 fuse, 35A, 400VAC, gL/gG, set consists of 3 pieces



Powering Business Worldwide™

Part no. Z-SLS/E-35A
Catalog No. 269010

Similar to illustration

Delivery program

| | | | |
|-------------------------|--|--|--|
| Product range | | | Fuse material |
| Basic function | | | Accessories |
| Basic function | | | Fuse sets |
| For use with | | | Z-SLS/NEOZ Z-SLK/NEOZ Z-SLS/CEK |
| | | | Snap-fit on DIN rail 1 set consists of: 3 fuse-links, 3 current codings, 1 plastic box in the colour of the indicator |
| Rated operating voltage | | | 400 V AC, 220 V DC |

Technical data

Electrical

| | | | |
|---------------------------|-------|------|---------|
| Rated operational voltage | U_e | V | |
| Rated operating voltage | U_e | V AC | 400 |
| | | V DC | 220 |
| Utilization category | | | gG (gL) |
| Test voltage | | kV | 5 |


Design verification as per IEC/EN 61439

| | | | |
|--|-----------|----|------|
| Technical data for design verification | | | |
| Rated operational current for specified heat dissipation | I_n | A | 35 |
| Heat dissipation per pole, current-dependent | P_{vid} | W | 3.42 |
| Equipment heat dissipation, current-dependent | P_{vid} | W | 3.42 |
| Static heat dissipation, non-current-dependent | P_{vs} | W | 0 |
| Operating ambient temperature min. | | °C | -25 |
| Operating ambient temperature max. | | °C | 40 |


Technical data ETIM 7.0

| | | | |
|---|--|---|---|
| Circuit breakers and fuses (EG000020) / D0-system fuse link (EC001642) | | | |
| Electric engineering, automation, process control engineering / Electrical installation, device / Safety fuse systems / Neozed fuse link (ecl@ss10.0.1-27-14-21-19 [ACN353011]) | | | |
| Construction size | | | D02 |
| Rated current | | A | 35 |
| Rated voltage | | V | 400 |
| Colour code | | | Black |
| Utilization category | | | gL/gG (cable protection/equipment protection) |

Characteristics

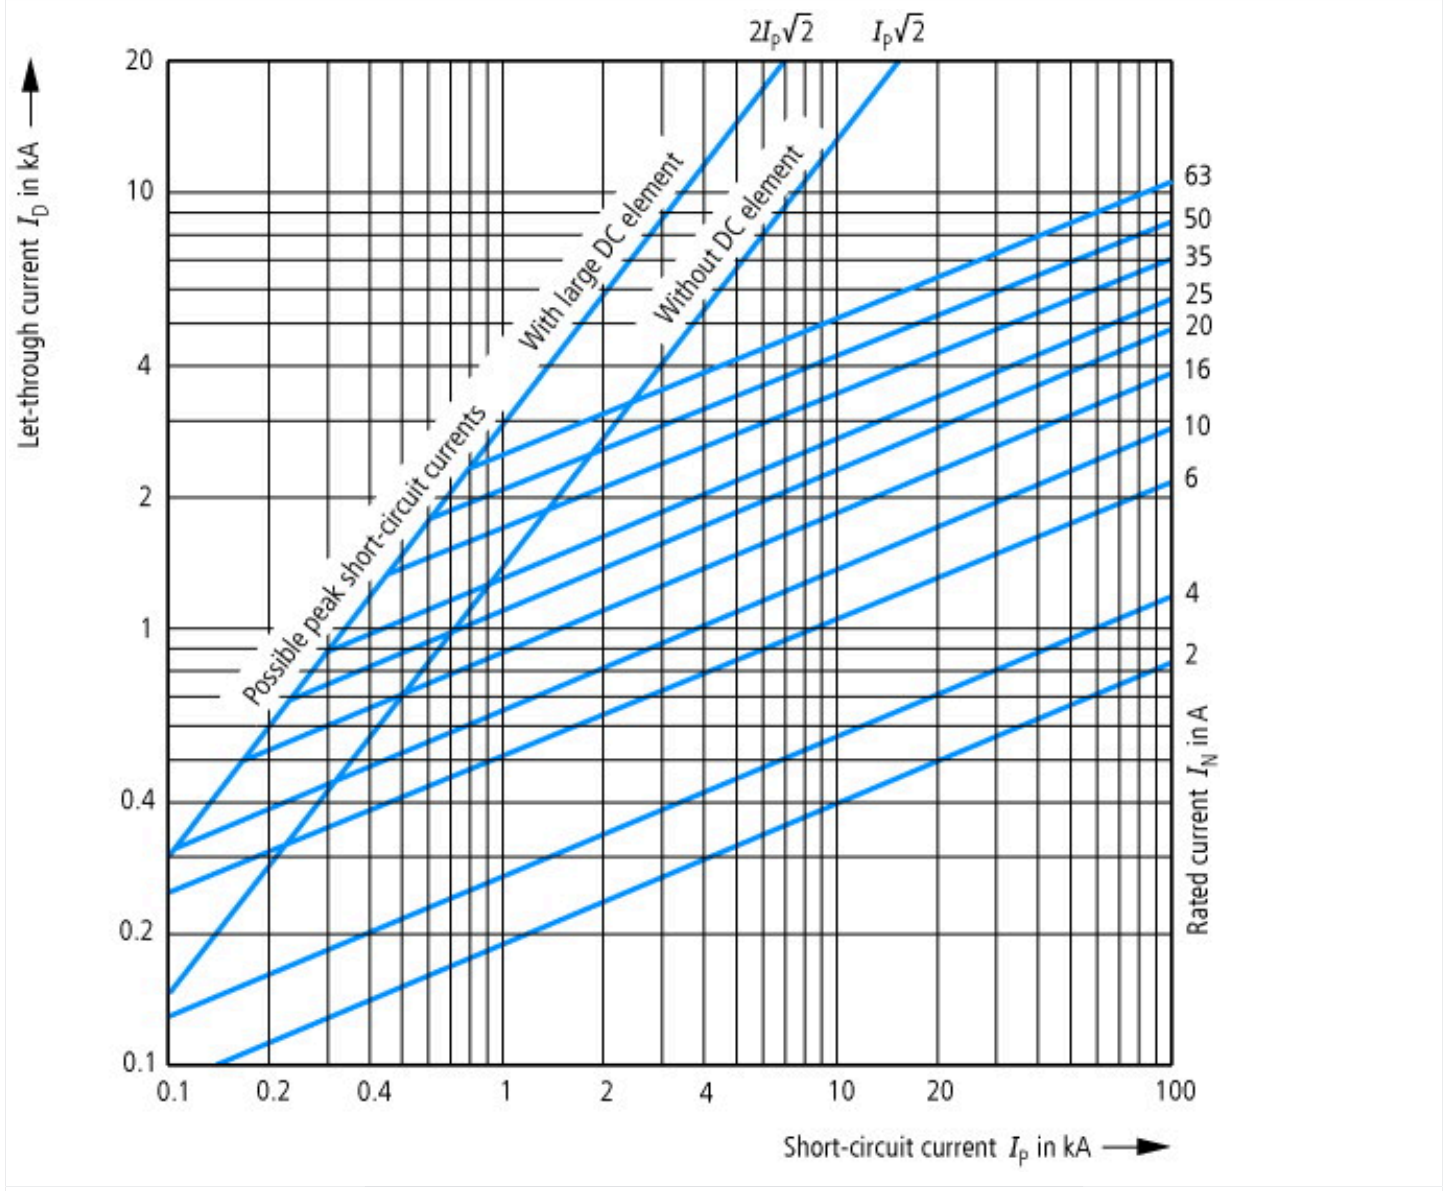

Let-through current characteristic, D0 fuse links 2...63 A gG(gL)

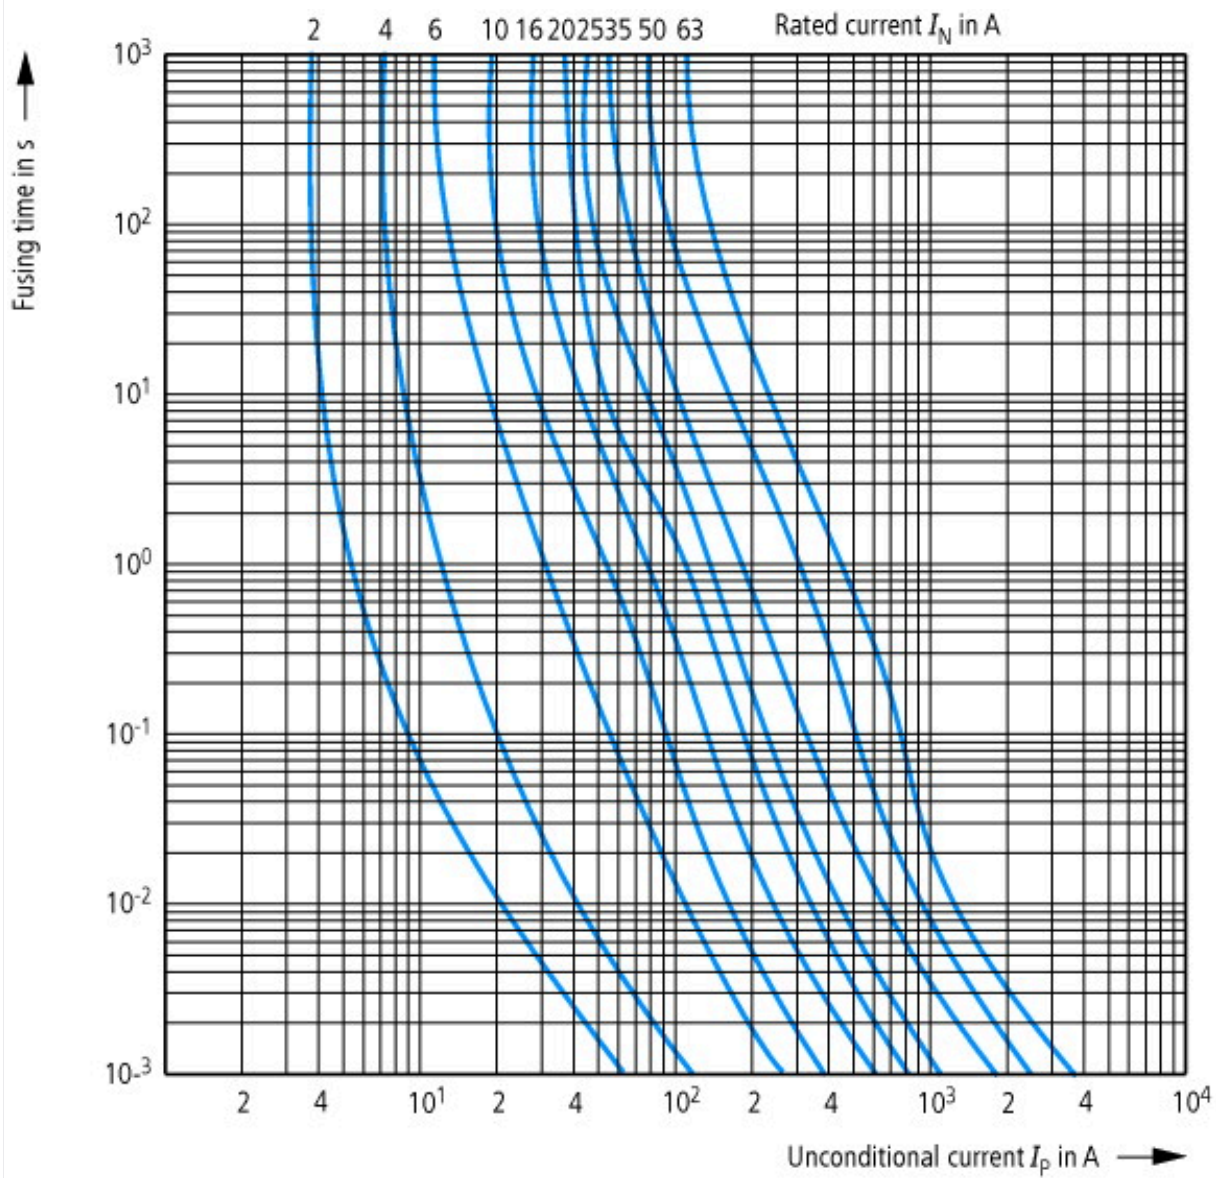

Time/current characteristic, D0 fuse links 2...63 A gG(gL)