


EPIC® H-B 16 TS-RO

Housing design H-B. The industry standard.

The robust low housing with a neck has a side cable entry and pivots for a single lever. It is suitable for use in investment construction.

Info

Non-slip ridges for comfortable disconnecting Protection rating UL50E tested

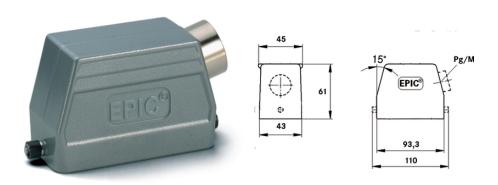





Supplementary automation components from Lapp



Mechanical and plant engineering



Mechanical resistance



Robust



Waterproof

Benefits

The housing standard. Wide choice for all applications

Application range

Plant engineering Light & sound technology Plastics industry

Product features

Last Update (07.10.2021) ©2021 Lapp Group - Technical changes reserved Product Management www.lappkabel.de You can find the current technical data in the corresponding data sheet. PN 0456 / 02_03.16



EPIC® H-B 16 TS-RO

Hood, low version Reels for single lever Side cable entry Versions with neck

Technical Data

Classification ETIM 5: ETIM 5.0 Class-ID: EC000437

ETIM 5.0 Class-Description: Housing for industrial connectors

Classification ETIM 6: ETIM 6.0 Class-ID: EC000437

ETIM 6.0 Class-Description: Housing for industrial connectors

Material: Housing: powder-coated aluminium alloy, grey

Lever: zinc-plated steel

Sealing: NBR

Protection rating: IP 65 (latched)

UL50 Type 12 (latched)

VDE-tested: Certified production control: VDE-REG. no.: B437

UL-tested:

UL File Number: E75770

Temperature range: -40°C to +100°C, short-term up to +125°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products. Prices are net prices without VAT and surcharges. Sale to business customers only.



EPIC® H-B 16 TS-RO

Article number	Article description	M	PG	Neck	Pieces / PU
H-B housing: hood (side cable entry, bolts for single lever)					
10082900	H-B 16 TS-RO 21	-	21	yes	5
10092900	H-B 16 TS-RO 29	-	29	yes	5
19082900	H-B 16 TS-RO M25	25	-	yes	5
19092900	H-B 16 TS-RO M32	32	-	yes	5