


DIN-Coil conductor end sleeves

Insulated conductor end sleeves in strips/coils

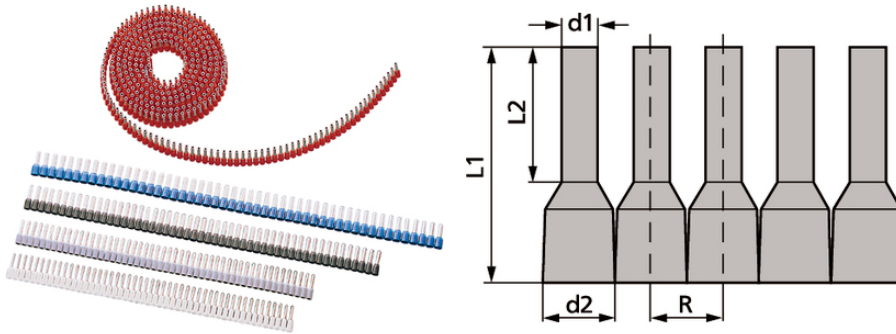

Halogen-free

Application range

Insulated conductor end sleeves in strips, DIN 46228, Part 4

DIN strips, available in coils of up to 3000 items for working with automatic crimping machines

Included

Coil diameter: approx. 25 cm

Technical Data

Classification ETIM 5:

ETIM 5.0 Class-ID: EC000005

ETIM 5.0 Class-Description: Cable end sleeve

Classification ETIM 6:

ETIM 6.0 Class-ID: EC000005

ETIM 6.0 Class-Description: Cable end sleeve

Material:

Copper/PP

Surface: tin-plated

Temperature range:

Permanent load -5°C up to +105°C, temporary load +120°C

Note

Photographs and graphics are not to scale and do not represent detailed images of the respective products.

Prices are net prices without VAT and surcharges. Sale to business customers only.

DIN-Coil conductor end sleeves

| Article number | Article designation | For mm ² | Colour | l1 mm | l2 mm | d1 mm | d2 mm | R mm | Contents (unit) |
|----------------|---------------------|---------------------|--------|-------|-------|-------|-------|------|-----------------|
| 61802052 | DIN coil 0.5 | 0.5 | white | 14.5 | 8 | 1.1 | 2.6 | 3.5 | 3000 x 1 |
| 61802054 | DIN coil 0.75 | 0.75 | grey | 14.5 | 8 | 1.3 | 2.8 | 3.6 | 3000 x 1 |
| 61802056 | DIN coil 1.0 | 1 | red | 14.5 | 8 | 1.5 | 3 | 3.9 | 3000 x 1 |
| 61802058 | DIN coil 1.5 | 1.5 | black | 14.5 | 8 | 1.8 | 3.4 | 4.2 | 2500 x 1 |
| 61802060 | DIN coil 2.5 | 2.5 | blue | 14.5 | 8 | 2.3 | 4.2 | 5 | 1500 x 1 |

Last Update (03.02.2021)

©2021 Lapp Group - Technical changes reserved

Product Management www.lappkabel.de

You can find the current technical data in the corresponding data sheet.
PN 0456 / 02_03_16