

381166319	DATA SHEET	
Valid from: 28.06.2024	EPIC® SENSOR M12A 4-PIN SCREW	

Description:

- Circular connector for signal transmission
- Straight and angled version with cable aperture 4 mm - 8 mm
- High-quality gold-plated contacts



Product variants:

Article number	Type	Pole image	Cable diameter
381166319	Cable plug with male contacts (F6)	A-coded; 4 pole	4 mm - 8 mm
381166326	Cable socket with female contacts (D6)	A-coded; 4 pole	4 mm - 8 mm
381166333	Angled cable plug with male contacts (F1)	A-coded; 4 pole	4 mm - 8 mm
381166339	Angled cable socket with female contacts (D7)	A-coded; 4 pole	4 mm - 8 mm

General characteristic values:

Series	Sensor M12
Coding	A-coded
Execution	Cable plug/cable socket (angled or straight)
Pole image	4-PIN
Rated voltage	250 V
Rated impulse voltage	2.5 kV
Degree of soiling	3
Rated current in A	4 A
Insulation resistance	≥100 MΩ
Contact resistance	≤ 10 mΩ
Connection cross-section	Screw terminal contacts up to 1.5 mm² (AWG 16)
Cable connection	4 mm - 8 mm
Protection class	IP 67 according to IEC 60529
Mating cycles	>100
Temperature range	-25°C to +85°C
Tightening torque Contact:	0.3 Nm
Tightening torque cable clamp:	0.6 Nm
Tightening torque for connector locking	0.3 Nm

Materials/surface:

Contacts	Copper alloy
Contact surface	Au (gold)
Contact body material	PA

Standards:

Product standard	DIN EN 61076-2-101
------------------	--------------------

Authorisations:

In preparation


Creator: STKU3/BU EPIC Released: IVSE1/BU EPIC	Document: DB381166319EN Version: 01	Page 1 from 3
---	--	---------------

381166319	DATA SHEET	
Valid from: 28.06.2024	EPIC® SENSOR M12A 4-PIN SCREW	

Technical drawings

Cable plug F6

Technical drawing

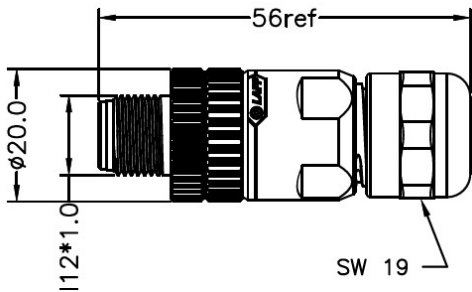


Pole image



Cable socket D6

Technical drawing

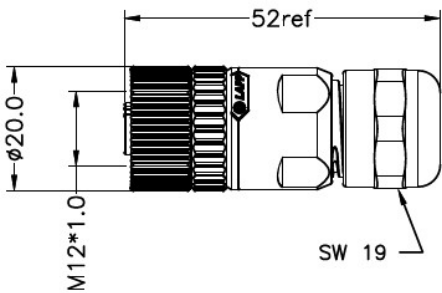


Pole image



Angled cable connector F1

Technical drawing

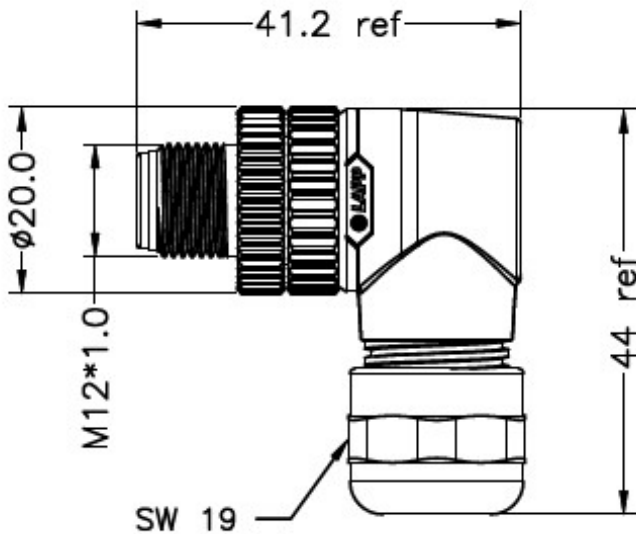

Pole image

