

ENERGY AND AUTOMATION

MODULES LUMINEUX ÀSOURCE FIXE CULOT BA15D BLANC (LAMPE NON FOURNIE)



Product designation

Signal tower Ø70mm/2.75" 8TL7EL - Light mudules

Product type designation


General characteristics	
Diameter	mm - inch 70 / 2.75
Supply voltage (DC)	V 24
Colour	White
IEC degree of protection	IP65
Mechanical features	
Weight	g 82
Ambient conditions	
Tomporaturo	


Temperature

Operating temperature

min	°С	-20
max	°C	+50


Dimensions







Wiring diagrams

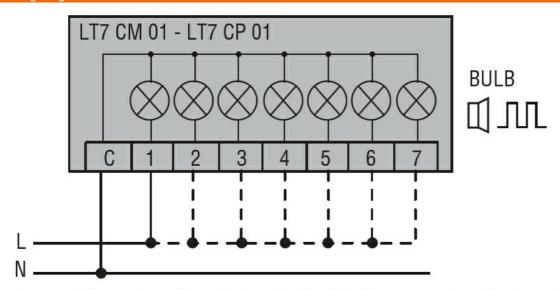

Connect terminals C and 1 as indicated to power the first module. If other modules are fitted, the respective terminals must be connected accordingly.

Certifications and co	mpliance
Compliance	
	CSA C22.2 n° 14
	IEC/EN 60947-1
	IEC/EN 60947-5-1
	UL508
Certificates	
	cULus
	EAC

ETIM classification

ETIM 8.0

EC000232 -Optical module for signal tower