

CUBE67 I/O EXTENSION MODULE

32 multifunction channels

Expansion module


DIO32 - 0.5 A (E) 16×M12

Digital inputs/outputs (multifunctional)

Connection cables are in the online shop under "Connection Technology". Housing fully potted.

[Link to Product](#)

Illustration

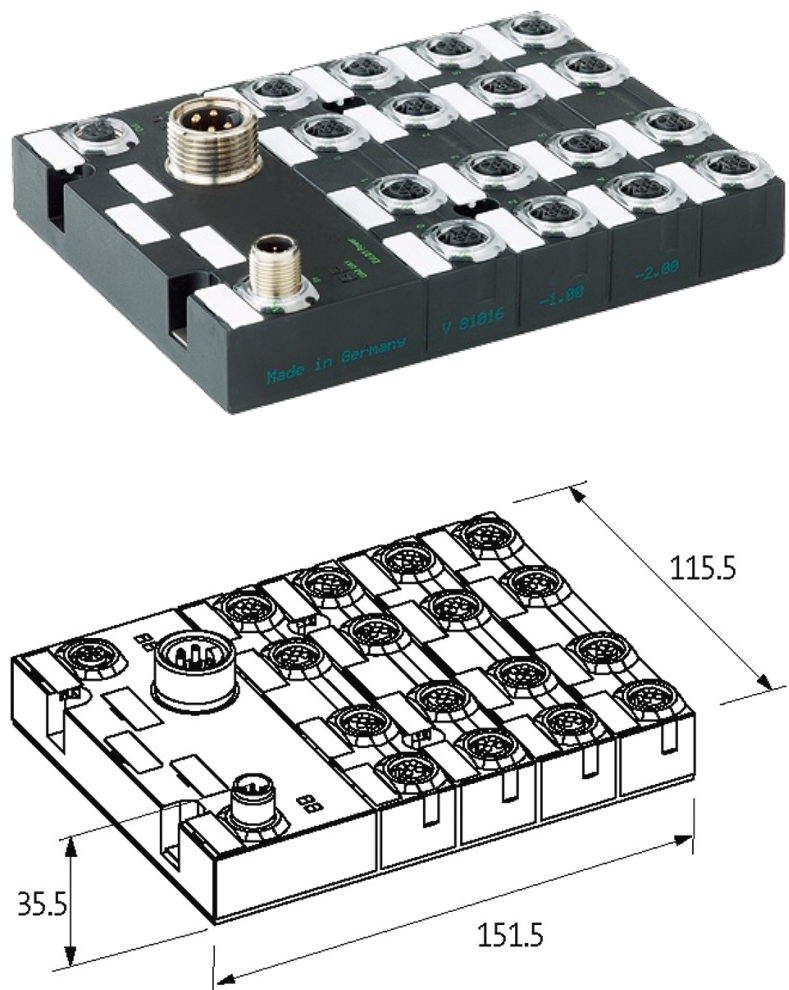

Product may differ from Image

Input

Sensor supply US	24 V DC (EN 61131-2), max. 200 mA (M12 female), short-circuit and overload protected
Type	for 3-wire sensors or mechanical switches, PNP
Input filter	1 ms

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 04/19

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Internal communication

Current consumption	max. 60 mA
LED display	US: sensor supply and internal supply voltage (green: OK); UA: actuator supply (green: OK)

Connections

Fieldbus	via internal system connection
Sensor-system/actuator supply	via internal system connection (max. 2×4 A)
I/O ports	M12 (female) 5-pole, A-coded

General data

Protection	IP67
Mounting method	4 hole screw mounting
Temperature range	0...+55 °C (storage temperature -20...+75 °C)
Dimensions H × W × D	151.5×115.5×35.5 mm

Output

Actuator supply (8×M12 left side)	24 V DC (EN 61131-2), via 7/8" male (max. 1 × 9 A)
Actuator supply (8×M12 right side)	24 V DC (EN 61131-2), via 7/8" male (max. 1 × 9 A)
Switching current per output (8×M12 left)	max. 0.5 A (short-circuit and overload protected)
Switching current per output (8×M12 right)	max. 0.5 A (short-circuit and overload protected)
Lamp load (8×M12 left)	10 W
Lamp load (8×M12 right)	10 W

Parameterization

PIN 2 (8 × M12 left side)	Input/Output/Diagnostic
PIN 4 (8 × M12 left side)	Input/Output
PIN 2 (8 × M12 right side)	Input/Output/Diagnostic
PIN 4 (8 × M12 right side)	Input/Output

Diagnostic

Communication status	via LED
Diagnostic via LED	per module and channel
Diagnostic via BUS	per module and channel
Monitoring - under voltage	yes
Monitoring - no voltage	yes
Short-circuit and overload	yes
Actuator warning	per channel via LED and BUS

Commercial data

country of origin	DE
customs tariff number	85389099
EAN	4048879353083
eClass	27242604
Packaging unit	1