

M8 FEMALE 0° FIELD-WIREABLE SCREW TERM.4-pol. 0,14...0.5mm²



Female straight


M8, 4-pole

Screw terminals

Connection cross section: 0.14...0.5 mm²[Link to Product](#)**Illustration**

Female

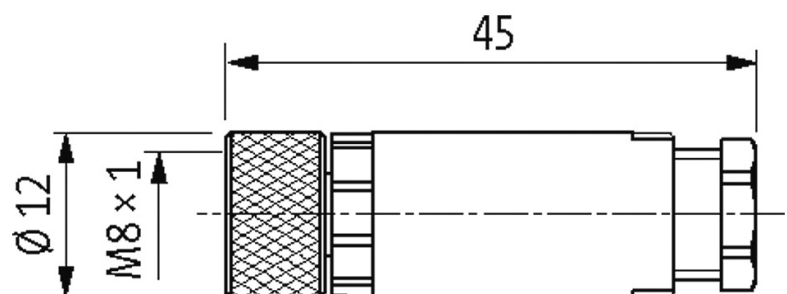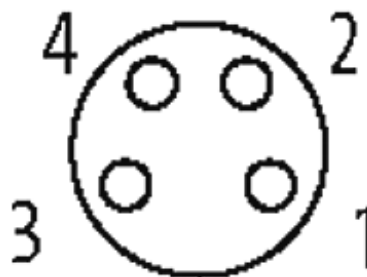

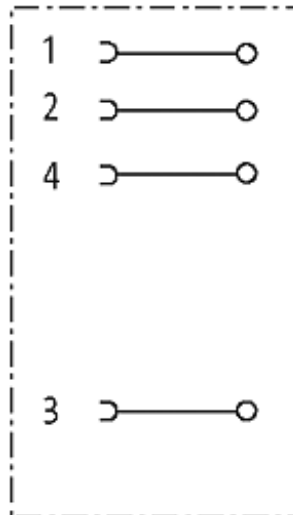

Product may differ from Image

Approvals



Form

Form 08631

Technical Data

Operating voltage	max. 30 V AC/DC
Rated surge voltage	0.8 kV
Operating current per contact	max. 4 A
Connection cross section	0.14...0.5 mm ²
Sealing range (cable Ø)	2.5...5.0 mm
Protection	IP67 inserted and tightened (EN 60529)

General data

Temperature range	-25...+85 °C
Dimensions H × W × D	45×12×12 mm

Commercial data

country of origin	DE
customs tariff number	85369010
EAN	4048879224505
eClass	27279221
Packaging unit	1