
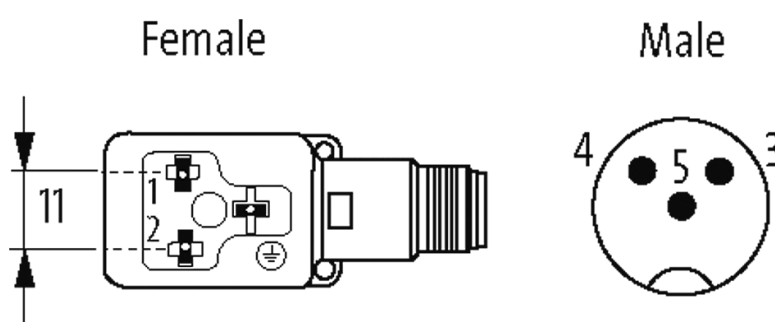
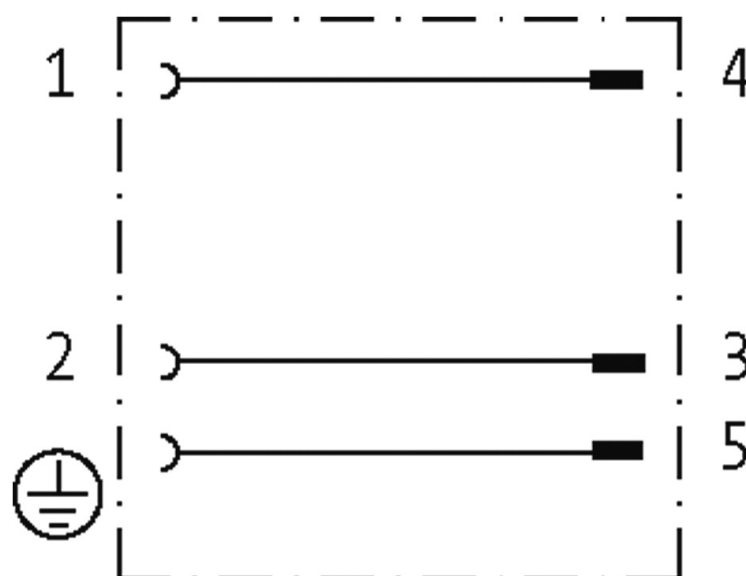


M12 MALE ON REAR OF MSUD VALVE PLUG FORM BI 11MM

Form BI (11 mm) – M12, connector at the rear
max. 125 V AC/DC
without components
3-pole

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

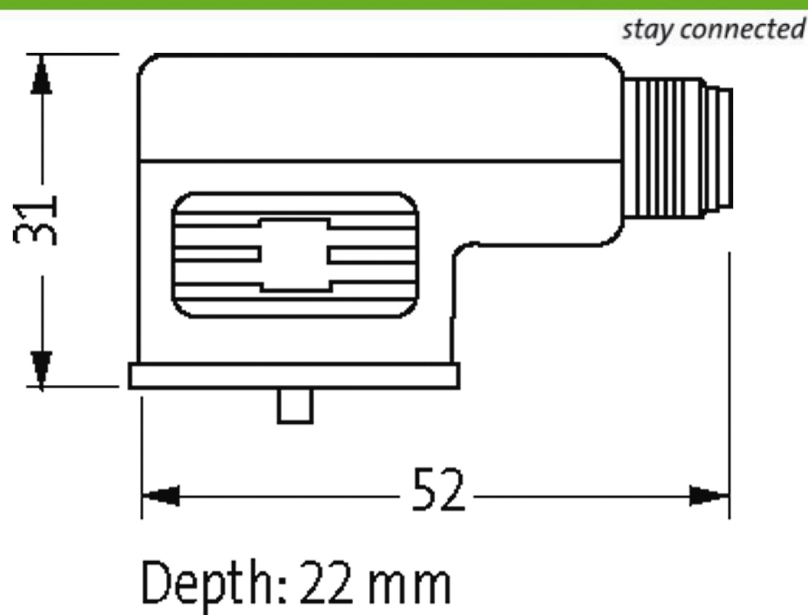

Product may differ from Image

Approvals



Form

Form 42041

Technical Data

Operating voltage max. 125 V AC/DC

Rated surge voltage 1.5 kV

Operating current per contact max. 4 A

Configuration 2 contacts + PE

Material group IEC 60664-1, category I

Coding	M12, A-coded
LED display	no
Locking of ports	M3/M12 × 1 mm (recommended torque 0.4/0.6 Nm)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	Steel (galvanized)

General data

Pollution Degree	3
Mounting method	inserted, tightened
Temperature range	-25...+85 °C

Commercial data

country of origin	CZ
customs tariff number	85369010
EAN	4048879143295
eClass	27143423
Packaging unit	1