

**7/8" MALE 0° FIELD-WIREABLE SCREW**


5-pol. clamp section 10-12 mm



Male straight  
7/8", 5-pole  
Screw terminals

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)**Illustration**

Male

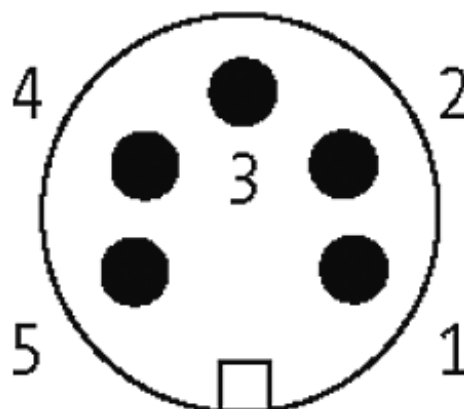

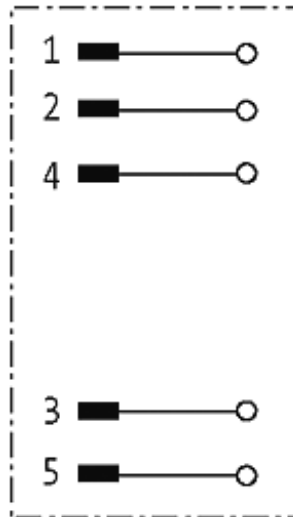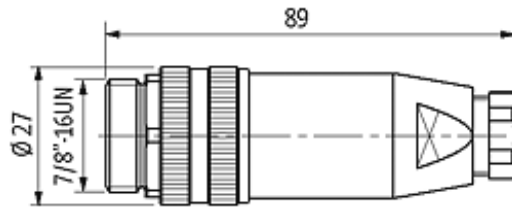

Product may differ from Image

### Approvals



### Form

Form 78101

### Technical Data

Operating voltage	max. 250 V AC/DC
Operating current per contact	max. 9 A
Connection cross section	max. 1.5 mm <sup>2</sup>
Sealing range (cable Ø)	10...12 mm
Locking of ports	Screw thread 7/8" (recommended torque 1.5 Nm) self-securing
Protection	IP67 inserted and tightened (EN 60529)

### General data

Temperature range -25...+85 °C

### Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879134767
eClass	27279218

Packaging unit

1