

T COUPLER M12 MALE / M8 FEMALE 0° LITE

T-coupler

Male straight – females straight

M12, 4-pole – M8, 3-pole


Distribution function (NO)



7005 - plastic hexagonal screw (M12/M8 Lite)

Plastic housings with good resistance against chemicals and oils. The resistance to aggressive media should be individually tested for your application. Further details on request.

[Link to Product](#)

Illustration

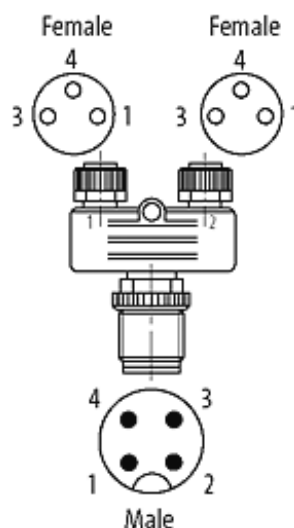

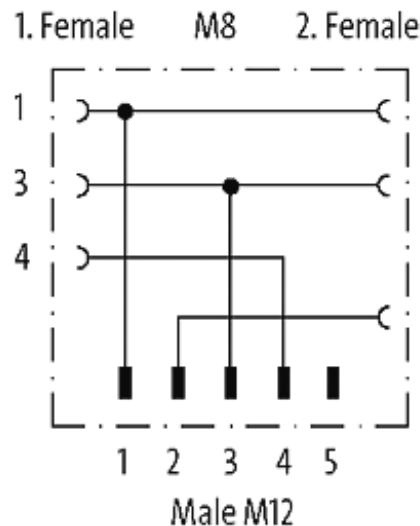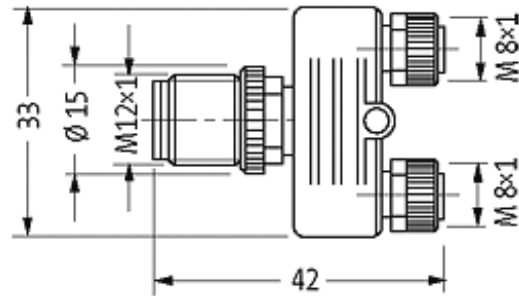

Product may differ from Image

Approvals



Form

Form 41201

Technical Data

Operating voltage	max. 50 V AC/60 V DC
Operating voltage (only UL listed)	max. 30 V AC/DC
Rated surge voltage	1.5 kV
Operating current per contact	max. 4 A
Material group	IEC 60664-1, category I
Coding	A-coded
Locking of ports	Screw thread M8/M12 × 1 mm (recommended torque 0.4/0.6 Nm) self-securing
Compression gland	M8 (SW9), M12 (SW13)
Protection	IP67 inserted and tightened (EN 60529)
Locking material	PA
Material	PUR

General data

Pollution Degree	3
Temperature range	-25...+85 °C
Material (gasket)	FKM

Commercial data

country of origin	DE
customs tariff number	85366990
EAN	4048879413947
eClass	27279218
Packaging unit	1