

MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 3000VA IN: 400VAC+/- 5% OUT: 230VAC

Single-phase - Control and Isolation Transformers
 3000 VA
 Spring clamp terminals
 Isolation class T 40/B

[Link to Product](#)**Illustration**

Product may differ from Image

Approvals**General data**

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Test isolation voltage	4 kV (prim./sec.)
Dimensions H×W×D	195×198×250 mm
Fixing centers a×b×c	200×174×9 mm
Drill hole Ø	9×14 mm
Mounting method	Long-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

Output voltage	230 V AC
Output rating	3000 VA

Input

Input voltage	400 V AC ±5%
Frequency	50...60 Hz
Input current	7.66 A (400 V AC)
Short-circuit current	356 A (400 V AC)
Inrush current	208 A (400 V AC)

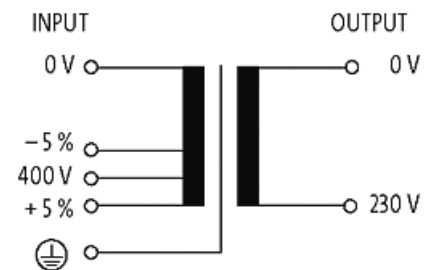
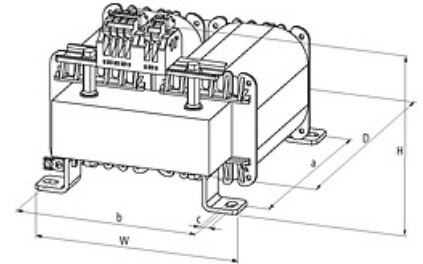
Commercial data

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/21

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

country of origin	CZ
customs tariff number	85043200
EAN	4048879066297
eClass	27031302
Packaging unit	1

Sketch

Product may differ from Image