

## MET 1-PHASE CONTROL AND ISOLATION TRANSFORMER

P: 2000VA IN: 230VAC+/- 5% OUT: 230VAC

Single-phase - Control and Isolation Transformers  
2000 VA  
Isolation class T 40/B

### [Link to Product](#)

#### Illustration



Product may differ from Image

#### Approvals



#### General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Test isolation voltage	4 kV (prim./sec.)
Dimensions H×W×D	170×195×250 mm
Fixing centers a×b×c	200×174×9 mm
Drill hole Ø	9×14 mm
Mounting method	Long-hole mounting
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

#### Output

Output voltage	230 V AC
Output rating	2000 VA



#### Input

Input voltage	230 V AC ±5%
Frequency	50...60 Hz
Short-circuit current	334.8 A (230 V AC)
Input current	9.2 A (230 V AC)
Inrush current	142.2 A (230 V AC)

#### Commercial data

country of origin	CZ
customs tariff number	85043200
EAN	4048879078832
eClass	27031302
Packaging unit	1

### Sketch

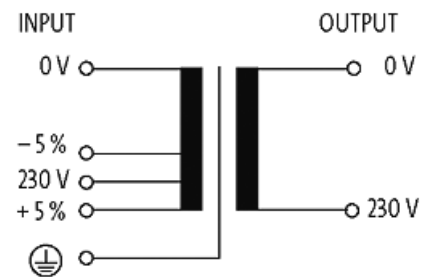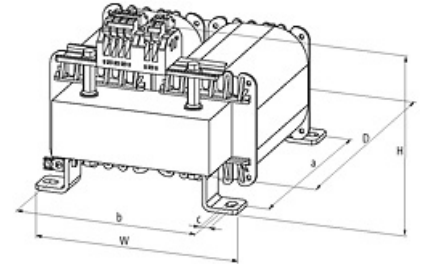

Product may differ from Image