

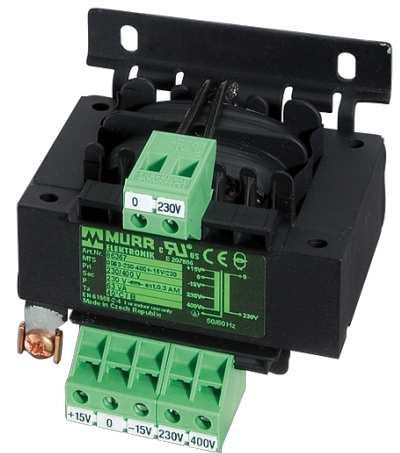
MST SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:125VA IN:230VAC±5% OUT:60VAC

Single-phase - Control and Isolation Transformers
125 VA
Isolation class T 40/B

[Link to Product](#)

Illustration



Product may differ from Image

Approvals



General data

| | |
|------------------------|---|
| Standards | EN 61558-1, EN 61558-2-4, EN 62041 category 0 |
| Test isolation voltage | 3.8 kV |
| Fixing centers a×b×c | 65.3×64×4.8 mm |
| Dimensions H×W×D | 88×84×95 mm |
| Drill hole Ø | 4.8×12 mm |
| Mounting method | Key-hole mounting |
| Temperature range | -20...+40 °C (storage temperature -40...+80 °C) |

Output

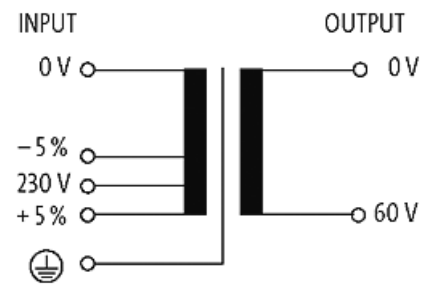
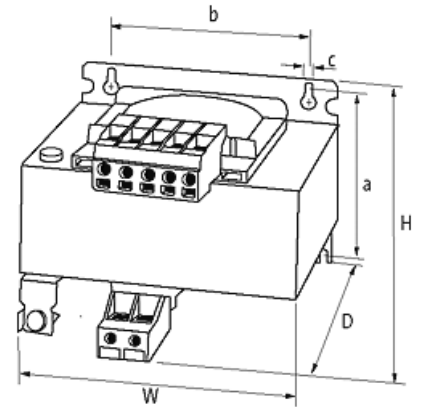
| | |
|----------------|---------|
| Output voltage | 60 V AC |
| Output rating | 125 VA |

Input

| | |
|-----------------------|-------------------|
| Input voltage | 230 V AC ±5% |
| Input current | 0.65 A (230 V AC) |
| Inrush current | 7.1 A (230 V AC) |
| Short-circuit current | 9.6 A (230 V AC) |
| Frequency | 50...60 Hz |

Commercial data

| | |
|-----------------------|---------------|
| country of origin | CZ |
| customs tariff number | 85043180 |
| EAN | 4048879073790 |
| eClass | 27031202 |
| Packaging unit | 1 |

Sketch

Product may differ from Image