

MST SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER

P:2500VA IN:690VAC OUT:230VAC

Single-phase - Control and Isolation Transformers
 2500 VA
 Isolation class T 40/B
 Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

General data

Standards	EN 61558-1, EN 61558-2-4, EN 62041 category 0
Test isolation voltage	6.5 kV
Mounting method	Long-hole mounting
Dimensions H×W×D	250×197×174 mm
Fixing centers a×b×c	130×150×10 mm
Drill hole Ø	18×10 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

Output

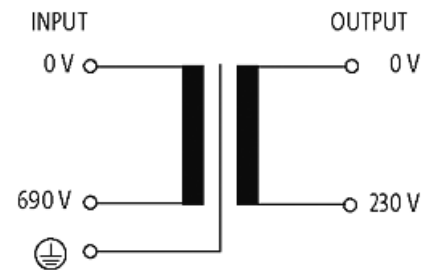
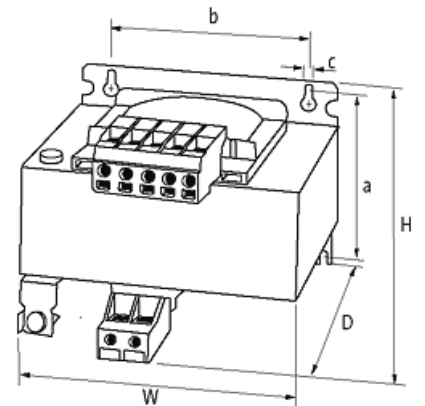
Output voltage	230 V AC
Output rating	2500 VA

Input

Input voltage	690 V AC
Input current	3.9 A (690 V AC)
Inrush current	64 A (690 V AC)
Short-circuit current	127 A (690 V AC)
Frequency	50...60 Hz

Commercial data

country of origin	CZ
customs tariff number	85043200
EAN	4048879283229
eClass	27031202
Packaging unit	1

Sketch

Product may differ from Image