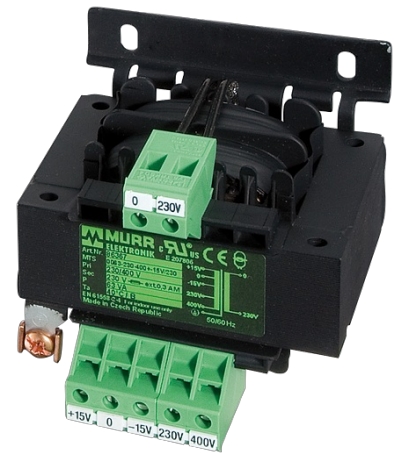


**MTS SINGLE-PHASE CONTROL AND ISOLATION TRANSFORMER**

P:150VA IN:440/460/480/500VAC OUT:24VAC/230VAC

Single-phase - Control and Isolation Transformers  
 3000 VA  
 Isolation class T 40/B  
 150 VA (440; 460; 480; 500 V AC)  
 Other voltages on request.

[Link to Product](#)**Illustration**

Product may differ from Image

**General data**

Standards	EN 61558-2-4, EN 61558-2-6, EN 62041 category 0
Test isolation voltage	6.1 kV
Mounting method	Long-hole mounting
Dimensions H×W×D	101×96×106 mm
Fixing centers a×b×c	86.5×84×4.8 mm
Drill hole Ø	4.8×8.4 mm
Temperature range	-20...+40 °C (storage temperature -40...+80 °C)

**Output**

Output voltage	24/230 V AC
Output rating	150 VA

**Input**

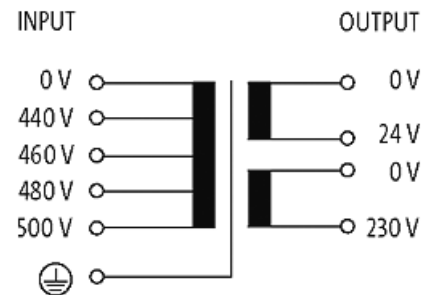
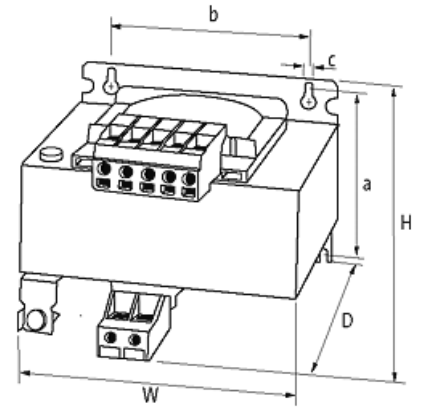
Input voltage	440, 460, 480, 500 V AC
Input current	0.41 A (440 V AC); 0.36 A (500 V AC)
Inrush current	4.2 A (440 V AC)
Short-circuit current	5.4 A (440 V AC)
Frequency	50...60 Hz

**Commercial data**

country of origin	CZ
customs tariff number	85043180
EAN	4048879322812
eClass	27031202

Packaging unit

1

**Sketch**

Product may differ from Image