

Mico Pro electronic circuit protection, 2 channels

IN: 24 V DC OUT: 24 V DC / 4 A

Mico Pro® fix 2.4

2 channels


Current adjustment 4 A

Build your own Mico Pro® online:

<https://micopro.murrelektronik.com>

[Link to Product](#)

Illustration

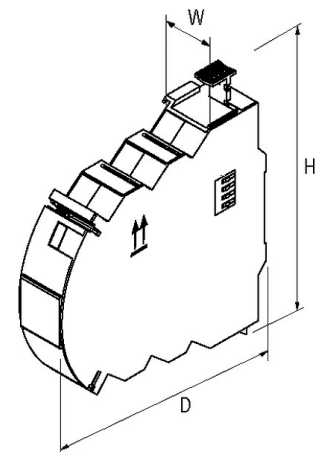

Product may differ from Image

Approvals



General data

Protection	IP20
Bridging concept	Bridge set (max. 40 A)
Mounting method	DIN-rail mountable TH35 (EN 60715)

The information in this brochure has been compiled with the utmost care.

Liability for the correctness completeness and topicality of the information is restricted to gross negligence. Version: 02/21

Murrelektronik GmbH | Falkenstraße 3 | 71570 Oppenweiler | Fon +49 (71 91) 47-0 | Fax +49 (71 91) 47-491000 | shop@murrelektronik.com | shop.murrelektronik.com

Temperature range	-25...+55 °C (storage temperature -40...+80 °C)
-------------------	---

Dimensions H×W×D	130×12×114 mm
------------------	---------------

Output

Current adjustment	4 A
--------------------	-----

No. of channels	2
-----------------	---

Inrush capacity	max. 30 mF
-----------------	------------

Tolerance	0...+20%
-----------	----------

Parallel usage/serial usage	-/Selectivity in 2 levels
-----------------------------	---------------------------

Input

Operating voltage	12 V DC; 24 V DC (9...30 V DC)
-------------------	--------------------------------

Total current	max. 40 A
---------------	-----------

Connections (IN)

Connection	Bridge system
------------	---------------

Connections (OUT)

Connection	Push-In spring clamp terminals
------------	--------------------------------

Cross section (rigid)	0.2...2.5 mm ² (AWG 24...14)
-----------------------	---

Cross section (flex)	0.2...4 mm ² (AWG 24...12)
----------------------	---------------------------------------

Control inputs

Input voltage (ON)	via power module
--------------------	------------------

Impulse length (ON)	via power module
---------------------	------------------

Input voltage (CTRL)	via power module
----------------------	------------------

Impulse length (CTRL)	via power module
-----------------------	------------------

Control outputs

Group alarm output	via power module
--------------------	------------------

Early warning (90%)	via power module
---------------------	------------------

Commercial data

country of origin	CZ
-------------------	----

customs tariff number	85363010
-----------------------	----------

EAN	4048879552646
-----	---------------

eClass	27141901
--------	----------

Packaging unit	1
----------------	---