


Product Technical Sheet

21 feb 2022 18:35

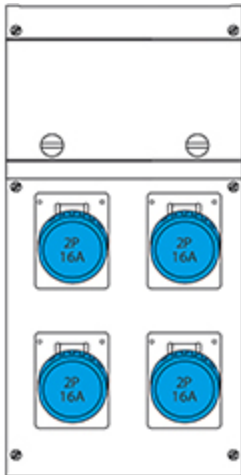

630.4509-711 CUADRO DE OBRA

4 NR IP66 212x415x105mm

Product Approvals

TECHDATA		STANDARDS AND LAWS	
Grado de protección	Splash proof	EN 61439-4 (2013-03)	[European Standard] Low-voltage switchgear and controlgear assemblies - Part 4: Particular requirements for assemblies for construction sites (ACS)
Tipo de instalación	PORTÁTIL	DIRECTIVE LOW VOLTAGE 2014/35 /UE	[European Directives] Low Voltage Directive
Serie comercial	Serie BLOCK	DIRECTIVE EMC 2014/30/UE	[European Directives] Electromagnetic Compatibility Directive
Tipo de producto	CUADRO DE OBRA		
Descripción	CUADRO DE OBRA		
Material	TERMOPLÁSTICO		
Dimensiones	212x415x105mm		
Grado de protección IP	IP66		
Grado de protección IK	IK08		
Unidad de alimentación	Clavija movil		
N.º de salidas disponibles	4 NR		
N.bases 24V	4 NR		
Tipo de aparato	Interrupt. magnetot. 1P+N 3a		
Potencia máx	Transf. 300 VA (230/24V)		