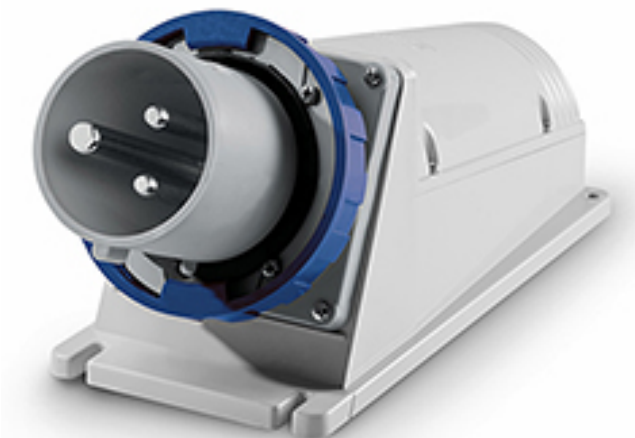


Article**245.12593**

APPLIANCE INLET 2P+E IP67 125A 6h

Picture**Master data**

Minimum order	8 NR
Net Weight	1.474 KG
EAN code	8001636172361
Harmonized System Code (HSCode)	85366990

TechData

Commercial series	OPTIMA Series
Synthetical description	SURFACE MOUNT. APPLIANCE INLET
Rated current	125A
Poles	2P+E
Hour position	6h
Rated voltage	200-250V
Working frequency	50Hz
Working frequency	60Hz
Colour	BLUE
Protection degree IP	IP66/IP67
Types of available outlets	ANGLED
Cable outlet	PG 48

Approvals and Certifications

UE

Declaration of conformity

Standards and Laws

EN 60309-1 (1999)

[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 1: General requirements



EN 60309-2 (1999)

[European Standard] Plugs, socket-outlets and couplers for industrial purposes. Part 2: Dimensional interchangeability requirements for pin and contact-tube accessories of harmonized configurations

Packaging

Description	Carton
-------------	--------

Annexed

Quantity	8
EAN code	8001636618456
Gross weight	14.24 KG
Volume	100188 CCM
Dimensions	360x460x605 (MM)
Description	Box
Quantity	1
EAN code	8001636618449
Gross weight	1.78 KG
Volume	9652.5 CCM
Dimensions	150x390x165 (MM)



Technical drawing [DWG]

.dwg



Technical drawing [PDF]

.pdf



Technical drawing [STP]

.stp

Note:

Cable gland included

**Articoli Collegati:**

	570.1125	MECHANIC LOCKING DEVICE 3P+N+E 125A IP67
	570.9125	PLUG CAP 100A 125A GREY