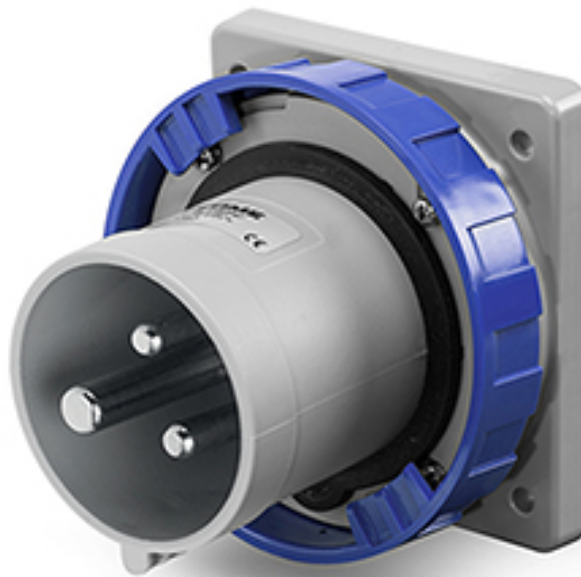


Article**248.6393**

APPLIANCE INLET 2P+E 6H 63A IP67

Picture**Master data**

Minimum order	10 NR
Net Weight	0.443 KG
EAN code	8001636288383
Harmonized System Code (HSCode)	85366990

TechData

Commercial series	OPTIMA Series
Synthetical description	FLUSH MOUNTING APPLIANCE INLET
Rated current	63A
Poles	2P+E
Hour position	6h
Rated voltage	200-250V
Working frequency	50Hz
Working frequency	60Hz
Colour	BLUE
Protection degree IP	IP66/IP67/IP69
Types of available outlets	STRAIGHT
Terminals	Mantle terminals
Flange	100X110MM

Approvals and Certifications
 UE
 Declaration of conformity

 EAC
 Eurasian Conformity
Standards and Laws
 EN 60309-1 (1999)
 [European Standard] Plugs, socket-outlets
 and couplers for industrial purposes. Part 1:
 General requirements

 EN 60309-2 (1999)
 [European Standard] Plugs, socket-outlets
 and couplers for industrial purposes. Part 2:
 Dimensional interchangeability requirements
 for pin and contact-tube accessories of
 harmonized configurations



EN 60309-1/A1 (2007)
 [European Standard] Plugs, socket-outlets
 and couplers for industrial purposes. Part 1:
 General requirements



EN 60309-2/A1 (2007)
 [European Standard] Plugs, socket-outlets
 and couplers for industrial purposes. Part 2:
 Dimensional interchangeability requirements
 for pin and contact-tube accessories of
 harmonized configurations



EN 60309-1/A2 (2012)
 [European Standard] Plugs, socket-outlets
 and couplers for industrial purposes. Part 1:
 General requirements



EN 60309-2/A2 (2012)
 [European Standard] Plugs, socket-outlets
 and couplers for industrial purposes. Part 2:
 Dimensional interchangeability requirements
 for pin and contact-tube accessories of
 harmonized configurations

Packaging

Description	Carton
Quantity	10
EAN code	8001636738536
Gross weight	4.91 KG
Volume	21756 CCM
Dimensions	370x420x140 (MM)

Annexed



Technical drawing [DWG]

.dwg



Technical drawing [PDF]

.pdf



Technical drawing [STP]

.stp