

SIRIUS Compact load feeder Reversing starter 690 V 110...240 V  
 AC/DC 50...60 Hz 1...4 A IP20 Connection main circuit: Screw  
 terminal Connection control circuit: screw terminal



product brand name	SIRIUS
Product designation	compact starter
Design of the product	reversing starter
Product type designation	3RA62

General technical data	
<b>Product function</b>	
• Control circuit interface to parallel wiring	Yes
<b>Product extension</b>	
• Auxiliary switch	Yes
<b>Power loss [W] for rated value of the current</b>	
• at AC in hot operating state	1 W
• at AC in hot operating state per pole	0.33 W
<b>Power loss [W] for rated value of the current without load current share typical</b>	6 W
• Insulation voltage rated value	690 V
<b>Degree of pollution</b>	3
<b>Surge voltage resistance rated value</b>	6 000 V
<b>maximum permissible voltage for safe isolation</b>	
• between main and auxiliary circuit	400 V

<ul style="list-style-type: none"> <li>• between auxiliary and auxiliary circuit</li> </ul>	250 V
<ul style="list-style-type: none"> <li>• between control and auxiliary circuit</li> </ul>	300 V
<ul style="list-style-type: none"> <li>• <b>Protection class IP</b></li> </ul>	IP20
<b>Degree of protection NEMA rating</b>	other
<b>Shock resistance</b>	a=60 m/s <sup>2</sup> (6g) with 10 ms per 3 shocks in all axes
<b>Vibration resistance</b>	f= 4 ... 5.8 Hz, d= 15 mm; f= 5.8 ... 500 Hz, a= 20 m/s <sup>2</sup> ; 10 cycles
<b>Mechanical service life (switching cycles)</b>	
<ul style="list-style-type: none"> <li>• of the main contacts typical</li> </ul>	10 000 000
<ul style="list-style-type: none"> <li>• of auxiliary contacts typical</li> </ul>	10 000 000
<ul style="list-style-type: none"> <li>• of the signaling contacts typical</li> </ul>	10 000 000
<b>Electrical endurance (switching cycles) of auxiliary contacts</b>	
<ul style="list-style-type: none"> <li>• at DC-13 at 6 A at 24 V typical</li> </ul>	30 000
<ul style="list-style-type: none"> <li>• at AC-15 at 6 A at 230 V typical</li> </ul>	200 000
<b>Type of assignment</b>	continous operation according to IEC 60947-6-2
<b>Reference code acc. to DIN EN 81346-2</b>	Q

### Ambient conditions

<b>Installation altitude at height above sea level</b>	
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	2 000 m
<b>Ambient temperature</b>	
<ul style="list-style-type: none"> <li>• during operation</li> </ul>	-20 ... +60 °C
<ul style="list-style-type: none"> <li>• during storage</li> </ul>	-55 ... +80 °C
<ul style="list-style-type: none"> <li>• during transport</li> </ul>	-55 ... +80 °C
Relative humidity during operation	10 ... 90 %

### Main circuit

<b>Number of poles for main current circuit</b>	3
<b>adjustable pick-up value current of the current-dependent overload release</b>	1 ... 4 A
<b>Formula for making capacity limit current</b>	12 x I <sub>e</sub>
<b>Formula for interruption capacity limit current</b>	10 x I <sub>e</sub>
<b>Mechanical power output for 4-pole AC motor</b>	
<ul style="list-style-type: none"> <li>• at 400 V rated value</li> </ul>	1.5 kW
<ul style="list-style-type: none"> <li>• at 500 V rated value</li> </ul>	2.2 kW
<ul style="list-style-type: none"> <li>• at 690 V rated value</li> </ul>	3 kW
<b>Operating voltage</b>	
<ul style="list-style-type: none"> <li>• at AC-3 rated value maximum</li> </ul>	690 V
<b>Operating current</b>	
<ul style="list-style-type: none"> <li>• at AC at 400 V rated value</li> </ul>	4 A
<ul style="list-style-type: none"> <li>• at AC-43</li> </ul>	
<ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul>	3.6 A
<ul style="list-style-type: none"> <li>— at 500 V rated value</li> </ul>	3.9 A
<ul style="list-style-type: none"> <li>— at 690 V rated value</li> </ul>	3.8 A

<b>Operating power</b>	
<ul style="list-style-type: none"> <li>• at AC-3 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> </ul> </li> <li>• at AC-43 <ul style="list-style-type: none"> <li>— at 400 V rated value</li> <li>— at 500 V rated value</li> <li>— at 690 V rated value</li> </ul> </li> </ul>	<p>1 500 W</p> <p>1 500 W</p> <p>2 200 W</p> <p>3 000 W</p>
<b>No-load switching frequency</b>	3 600 1/h
<b>Operating frequency</b>	
<ul style="list-style-type: none"> <li>• at AC-41 acc. to IEC 60947-6-2 maximum</li> <li>• at AC-43 acc. to IEC 60947-6-2 maximum</li> </ul>	<p>750 1/h</p> <p>250 1/h</p>

<b>Control circuit/ Control</b>	
<b>type of voltage</b>	AC/DC
<b>Control supply voltage 1 at AC</b>	
<ul style="list-style-type: none"> <li>• at 50 Hz</li> <li>• at 60 Hz</li> </ul>	<p>110 ... 240 V</p> <p>110 ... 240 V</p>
<b>control supply voltage frequency</b>	
<ul style="list-style-type: none"> <li>• 1 rated value</li> <li>• 2 rated value</li> </ul>	<p>50 Hz</p> <p>60 Hz</p>
<b>Control supply voltage 1</b>	
<ul style="list-style-type: none"> <li>• at DC</li> </ul>	110 ... 240 V
<b>Holding power</b>	
<ul style="list-style-type: none"> <li>• at AC maximum</li> <li>• at DC maximum</li> </ul>	<p>6 W</p> <p>5.1 W</p>

<b>Auxiliary circuit</b>	
<b>Number of NC contacts for auxiliary contacts</b>	0
<b>Number of NO contacts for auxiliary contacts</b>	2
<b>Number of NO contacts</b>	
<ul style="list-style-type: none"> <li>• of instantaneous short-circuit trip unit for signaling contact</li> </ul>	1
<b>Number of CO contacts</b>	
<ul style="list-style-type: none"> <li>• of the current-dependent overload release for signaling contact</li> </ul>	1
<b>Operating current of auxiliary contacts at AC-12 maximum</b>	10 A
<ul style="list-style-type: none"> <li>• operating current of auxiliary contacts at DC-13 at 250 V</li> </ul>	0.27 A

<b>Protective and monitoring functions</b>	
<b>Trip class</b>	CLASS 10 and 20 adjustable
<b>Operational short-circuit current breaking capacity (Ics)</b>	
<ul style="list-style-type: none"> <li>• at 400 V</li> </ul>	53 kA

- at 500 V rated value
- at 690 V rated value

3 kA

3 kA

### UL/CSA ratings

<b>Full-load current (FLA) for three-phase AC motor</b>	
• at 480 V rated value	4 A
• at 600 V rated value	4 A
<b>Yielded mechanical performance [hp]</b>	
• for three-phase AC motor	
— at 200/208 V rated value	0.75 hp
— at 220/230 V rated value	0.75 hp
— at 460/480 V rated value	2 hp
— at 575/600 V rated value	3 hp
<b>Contact rating of auxiliary contacts according to UL</b>	contacts 21-22, 13-14, 43-44 Q600 / A600, contacts 77-78 R300 / B300, contacts 95-96-98 R300 / D300

### Short-circuit protection

<b>Product function Short circuit protection</b>	Yes
<b>Design of short-circuit protection</b>	electromagnetic
<b>Design of the fuse link</b>	
• for short-circuit protection of the auxiliary switch required	fuse gL/gG: 10 A
• for short-circuit protection of the signaling switch of the short-circuit release required	6A gL/gG/400V
• for short-circuit protection of the signaling switch of the overload release required	4A gL/gG/400V

### Installation/ mounting/ dimensions

• <b>mounting position</b>	any
• Mounting position recommended	vertical, on horizontal standard mounting rail
<b>Mounting type</b>	screw and snap-on mounting
<b>Height</b>	170 mm
<b>Width</b>	90 mm
<b>Depth</b>	165 mm

### Connections/ Terminals

<b>Product function</b>	
• removable terminal for main circuit	Yes
• removable terminal for auxiliary and control circuit	Yes
• Type of electrical connection for main current circuit	screw-type terminals
• Type of electrical connection for auxiliary and control current circuit	screw-type terminals
<b>Type of connectable conductor cross-sections</b>	
• for main contacts	

— solid	2x (1.5 ... 6 mm <sup>2</sup> ), 1x 10 mm <sup>2</sup>
— finely stranded with core end processing	2x (1.5 ... 6 mm <sup>2</sup> )
• at AWG conductors for main contacts	2x (16 ... 10), 1x 8
<b>Type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid	0.5 ... 4 mm <sup>2</sup> , 2x (0.5 ... 2.5 mm <sup>2</sup> )
— finely stranded with core end processing	0.5 ... 2.5 mm <sup>2</sup> , 2x (0.5 ... 1.5 mm <sup>2</sup> )
• at AWG conductors for auxiliary contacts	2x (20 ... 14)

### Safety related data

<b>B10 value</b>	
• with high demand rate acc. to SN 31920	3 000 000
<b>Proportion of dangerous failures</b>	
• with low demand rate acc. to SN 31920	40 %
• with high demand rate acc. to SN 31920	50 %
<b>Failure rate [FIT]</b>	
• with low demand rate acc. to SN 31920	100 FIT
<b>T1 value for proof test interval or service life acc. to IEC 61508</b>	20 y

### Communication/ Protocol

<b>product function bus communication</b>	No
<b>Protocol is supported</b>	
• AS-Interface protocol	No
• IO-Link protocol	No
Product function Control circuit interface with IO link	No

### Electromagnetic compatibility

<b>Conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	4 kV main contacts, 2 kV auxiliary contacts
• due to conductor-earth surge acc. to IEC 61000-4-5	4 kV main contacts, 2 kV auxiliary contacts
• due to conductor-conductor surge acc. to IEC 61000-4-5	2 kV main contacts, 1 kV auxiliary contacts
• due to high-frequency radiation acc. to IEC 61000-4-6	0.15-80MHz at 10V
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	8 kV
<b>Conducted HF-interference emissions acc. to CISPR11</b>	150 kHz ... 30 MHz Class A
<b>Field-bound HF-interference emission acc. to CISPR11</b>	30 ... 1000 MHz Class A

### Supply voltage

<b>Supply voltage required Auxiliary voltage</b>	No
--	----

## Display

number of LEDs

3

## Certificates/ approvals

General Product Approval	EMC	Functional Safety/Safety of Machinery
--------------------------	-----	---------------------------------------



## Declaration of Conformity

## Test Certificates

## Marine / Shipping



EG-Konf.

[Miscellaneous](#)

[Type Test Certificates/Test Report](#)



ABS



BUREAU VERITAS



LRS

## Marine / Shipping

## other



PRS



RINA



RMRS



DNVGL.COM/AF

[Confirmation](#)

## Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RA6250-1CP32>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RA6250-1CP32>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3RA6250-1CP32>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)



[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RA6250-1CP32&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA6250-1CP32&lang=en)

Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current


<https://support.industry.siemens.com/cs/ww/en/ps/3RA6250-1CP32/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RA6250-1CP32&objecttype=14&gridview=view1>

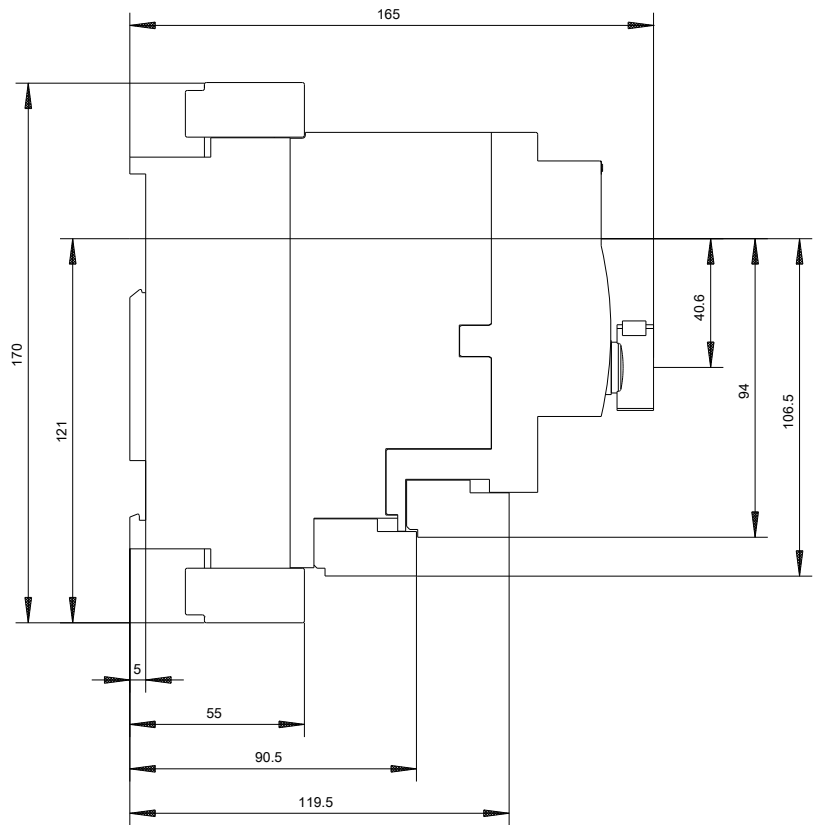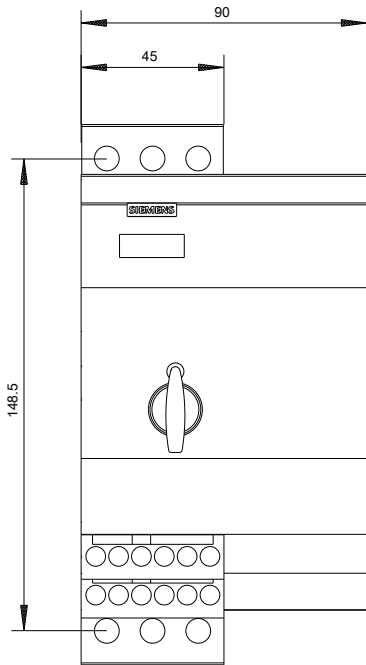



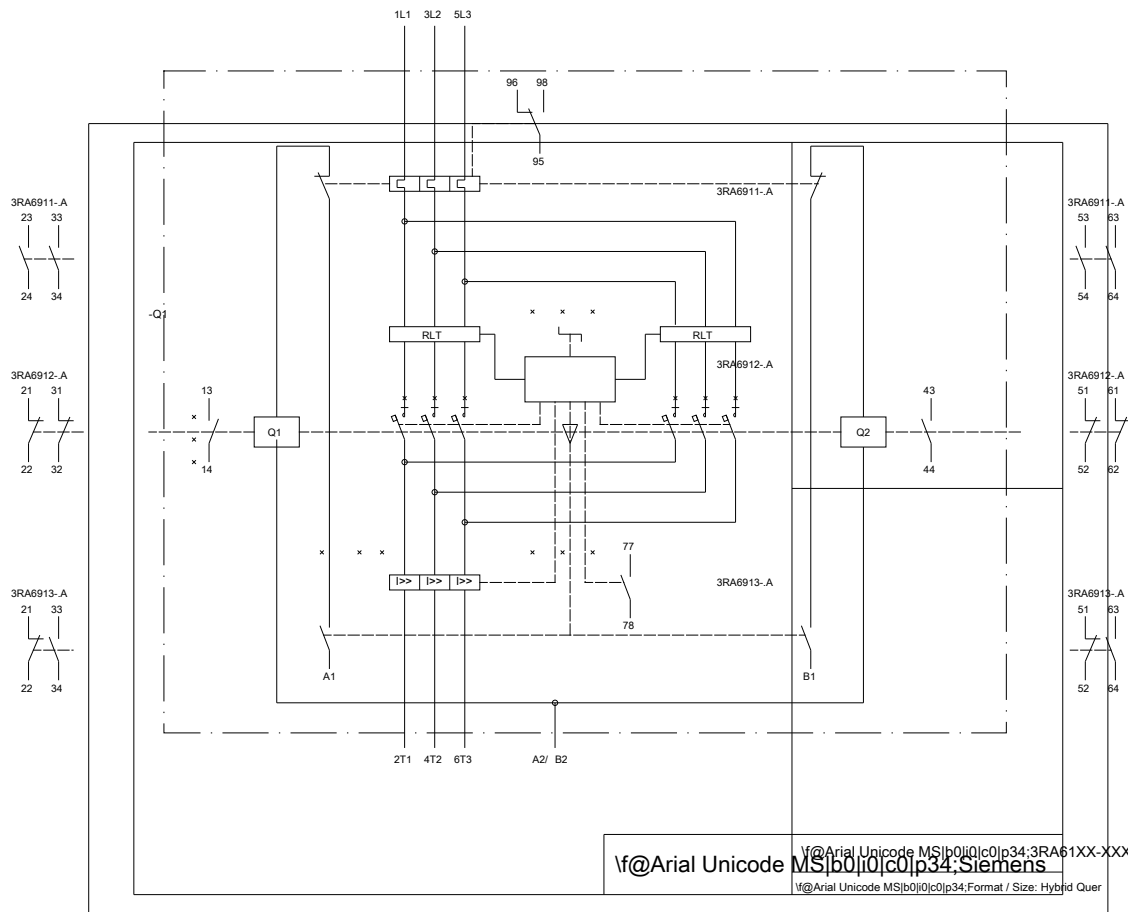

last modified:

08/13/2020