

Timing relay, electronic ansprechverzögert 1 change-over contact 24 V AC/DC, 200 to 240 V AC at 50/60 Hz AC 0.05 s to 100 h Overall width 45 mm Spring-type terminal



product brand name	SIRIUS
Product designation	timing relay
Design of the product	slow-operating
Product type designation	3RP20

General technical data	
Product component	
• Relay output	Yes
• semi-conductor output	No
Product extension required remote control	No
Product extension optional remote control	No
• — insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value	300 V
Test voltage for isolation test	2 kV
Degree of pollution	3
Surge voltage resistance rated value	4 000 V
• Protection class IP	IP20
Shock resistance	

• acc. to IEC 60068-2-27	11g / 15 ms
Vibration resistance	
• acc. to IEC 60068-2-6	10 ... 55 Hz / 0.35 mm
Mechanical service life (switching cycles)	
• typical	10 000 000
Electrical endurance (switching cycles)	
• at AC-15 at 230 V typical	100 000
adjustable time	0.05 s ... 100 h
Relative setting accuracy relating to full-scale value	5 %
thermal current	5 A
• recovery time	150 ms
Reference code acc. to DIN EN 81346-2	K
relative repeat accuracy	1 %

Control circuit/ Control

Type of voltage of the control supply voltage	AC/DC
Control supply voltage 1 at AC	
• at 50 Hz rated value	24 V
• at 60 Hz rated value	24 V
Control supply voltage 2 at AC	
• at 50 Hz	200 ... 240 V
• at 60 Hz	200 ... 240 V
control supply voltage frequency 1	50 ... 60 Hz
Control supply voltage 1	
• at DC rated value	24 V
operating range factor control supply voltage rated value at DC	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 50 Hz	
• initial value	0.85
• full-scale value	1.1
operating range factor control supply voltage rated value at AC at 60 Hz	
• initial value	0.85
• full-scale value	1.1

Switching Function

• switching function ON-delay	Yes
• switching function ON-delay/instantaneous contact	No
• switching function passing make contact	No

• switching function passing make contact/instantaneous contact	No
• Switching function OFF delay	No
Switching function	
• flashing symmetrically starting with interval/instantaneous	No
• flashing symmetrically starting with interval	No
• flashing symmetrically starting with pulse/instantaneous	No
• flashing symmetrically starting with pulse	No
• flashing asymmetrically starting with interval	No
• flashing asymmetrically starting with pulse	No
Switching function	
• star-delta circuit with delay time	No
• star-delta circuit	No
• Switching function with control signal additive ON delay	No
• Switching function with control signal passing break contact	No
• Switching function with control signal passing break contact/instantaneous	No
• Switching function with control signal OFF delay	No
• Switching function with control signal OFF delay/instantaneous	No
• Switching function with control signal pulse delayed	No
• Switching function with control signal pulse delayed/instantaneous	No
• switching function with control signal pulse-shaping	No
• Switching function with control signal pulse-shaping/instantaneous	No
• Switching function with control signal additive ON delay/instantaneous	No
• Switching function with control signal ON-delay/OFF-delay/instantaneous	No
• Switching function with control signal passing make contact	No
• Switching function with control signal passing make contact/instantaneous contact	No
Switching function of interval relay with control signal	
• retrotriggerable with deactivated control signal/instantaneous contact	No

- retrotriggerable with activated control signal
- retrotriggerable with activated control signal/instantaneous contact
- retriggerable with deactivated control signal

No
No
No

Short-circuit protection

Design of the fuse link

- for short-circuit protection of the auxiliary switch required

fuse gL/gG: 4 A

Auxiliary circuit

Material of switching contacts

AgSnO₂

Number of NC contacts

- delayed switching

0

Number of NO contacts

- delayed switching

0

Number of CO contacts

- delayed switching

1

- operating current of auxiliary contacts at AC-15 at 24 V

3 A

- operating current of auxiliary contacts at AC-15 at 250 V

3 A

- operating current of auxiliary contacts at DC-13 at 24 V

1 A

- operating current of auxiliary contacts at DC-13 at 125 V

0.2 A

- operating current of auxiliary contacts at DC-13 at 250 V

0.1 A

operating frequency with 3RT2 contactor maximum

5 000 1/h

contact reliability of auxiliary contacts

one incorrect switching operation of 100 million switching operations (17 V, 5 mA)

Contact rating of auxiliary contacts according to UL

R300 / B300

influence of the surrounding temperature

±5 %

Power supply influence

±1 %

Inputs/ Outputs

- Product function non-volatile

No

Electromagnetic compatibility

EMI immunity

- acc. to IEC 61812-1

EN 61000-6-2

Conducted interference

- due to burst acc. to IEC 61000-4-4

2 kV network connection / 1 kV control connection

- due to conductor-earth surge acc. to IEC 61000-4-5

2 kV

• due to conductor-conductor surge acc. to IEC 61000-4-5	1 kV
Field-bound parasitic coupling acc. to IEC 61000-4-3	10 V/m
Electrostatic discharge acc. to IEC 61000-4-2	4 kV contact discharge / 8 kV air discharge

Safety related data

Protection against electrical shock	finger-safe
Type of insulation	Basic insulation
Category acc. to EN 954-1	none

Connections/ Terminals

Product function	
• removable terminal for auxiliary and control circuit	No
• Type of electrical connection for auxiliary and control current circuit	spring-loaded terminals
• type of connectable conductor cross-sections solid	2x (0,25 ... 2,5 mm ²)
• Type of connectable conductor cross-sections finely stranded with core end processing	2 x (0.25 ... 1.5 mm ²)
• Type of connectable conductor cross-sections finely stranded without core end processing	2x (0.25 ... 2.5 mm ²)
• Type of connectable conductor cross-sections at AWG conductors solid	2x (24 ... 14)
• Type of connectable conductor cross-sections at AWG conductors stranded	2x (24 ... 14)
• connectable conductor cross-section solid	0.25 ... 2.5 mm ²
• connectable conductor cross-section finely stranded with core end processing	0.25 ... 1.5 mm ²
• connectable conductor cross-section finely stranded without core end processing	2.5 ... 2.5 mm ²
AWG number as coded connectable conductor cross section	
• solid	24 ... 14
• stranded	24 ... 14

Installation/ mounting/ dimensions

• mounting position	any
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail
Height	57 mm
Width	45 mm
Depth	73 mm
Required spacing	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm

— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	0 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +60 °C
• during storage	-40 ... +85 °C
• during transport	-40 ... +85 °C
Relative humidity	
• during operation	10 ... 95 %

Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



[Miscellaneous](#)

Test Certificates	Marine / Shipping
-------------------	-------------------

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
-------------------	-------

[Confirmation](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RP2025-2AP30>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RP2025-2AP30>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RP2025-2AP30>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RP2025-2AP30&lang=en

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RP2025-2AP30/manual>

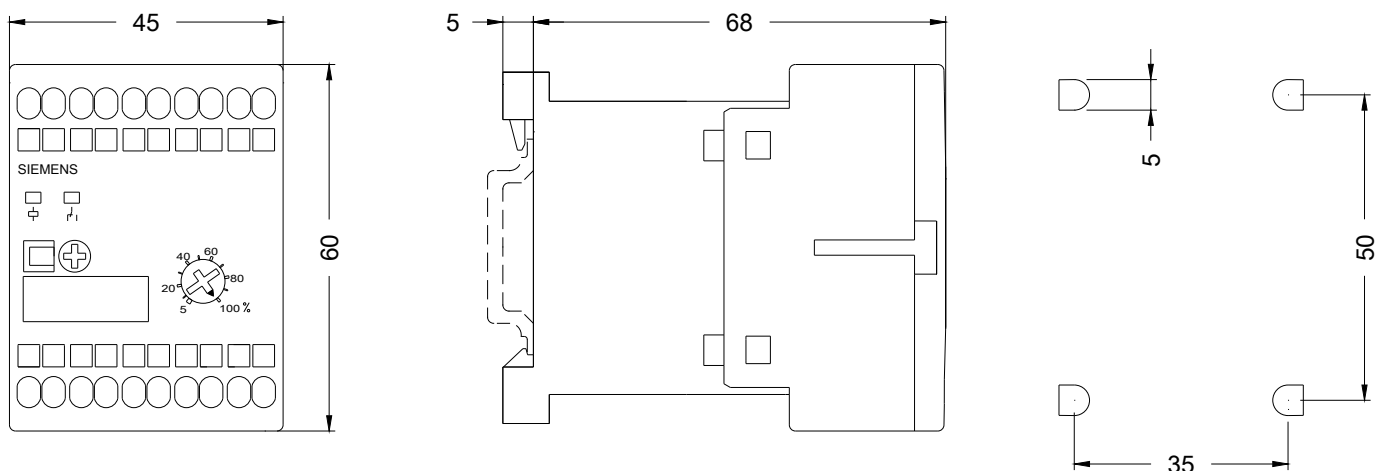

last modified:

08/14/2020