



Current monitoring relay for IO-Link, can be mounted to Contactor, 3RT2, Size S0 Apparant/active current monitoring 4-40 A, 20-400 Hz, 3-phase Supply voltage 24 V DC 1 change-over contact Monitoring for Current overshoot and undershoot Current asymmetry Phase failure, Cable break Phase sequence, Residual current Blocking current, Switching cycle and Operating hours counter Warning and alarm thresholds Auto-reset or manual reset ON delay 0-9999.9 s OFF delay 0-9999.9 s Reclosing delay 0-300 min spring-type connection system

product brand name	SIRIUS
product designation	Monitoring relays
design of the product	digitally adjustable, 3-phase current monitoring, IO-Link
product type designation	3RR2
General technical data	
size of contactor can be combined company-specific	S0
operating apparent power rated value	2.5 VA
insulation voltage for overvoltage category III according to IEC 60664	
<ul style="list-style-type: none"> with degree of pollution 3 rated value 	690 V
surge voltage resistance rated value	6 kV
protection class IP	
<ul style="list-style-type: none"> on the front of the terminal 	IP20 IP20
shock resistance	15g / 11 ms
vibration resistance	10 ... 55 Hz / 0.35 mm
mechanical service life (switching cycles) typical	10 000 000
electrical endurance (switching cycles) at AC-15 at 230 V typical	100 000
reference code according to IEC 81346-2	K
relative repeat accuracy	2 %
Substance Prohibitance (Date)	10/01/2009
Supply voltage	
type of voltage of the supply voltage	DC
supply voltage 1 at DC rated value	24 V
relative negative tolerance of the supply voltage	25 %
relative positive tolerance of the supply voltage	25 %
Measuring circuit	
type of current for monitoring	AC
adjustable current response value current	
<ul style="list-style-type: none"> 1 2 	4 ... 40 A 4 ... 40 A
adjustable response delay time	
<ul style="list-style-type: none"> when starting with lower or upper limit violation 	0 ... 999.9 s 0 ... 999.9 s
adjustable switching hysteresis for measured current value	0.1 ... 8 A
accuracy of digital display	+/-1 digit
Precision	
temperature drift per °C	0.1 %/°C

Communication/ Protocol	
protocol is supported IO-Link protocol	Yes
IO-Link transfer rate	COM2 (38,4 kBaud)
point-to-point cycle time between master and IO-Link device minimum	10 ms
type of voltage supply via input/output link master	Yes
data volume	
<ul style="list-style-type: none"> of the address range of the inputs with cyclical transfer total 	4 byte
<ul style="list-style-type: none"> of the address range of the outputs with cyclical transfer total 	2 byte
Auxiliary circuit	
number of CO contacts	
<ul style="list-style-type: none"> for auxiliary contacts 	1
operational current of auxiliary contacts at AC-15	
<ul style="list-style-type: none"> at 24 V 	3 A
<ul style="list-style-type: none"> at 230 V 	3 A
operational current of auxiliary contacts at DC-13	
<ul style="list-style-type: none"> at 24 V 	1 A
<ul style="list-style-type: none"> at 125 V 	0.2 A
<ul style="list-style-type: none"> at 250 V 	0.1 A
contact rating of auxiliary contacts according to UL	B300 / R300
Main circuit	
operating power rated value	2.5 W
ampacity of the semiconductor output in SIO mode	200 mA
operational current at 17 V minimum	5 mA
Electromagnetic compatibility	
EMC emitted interference according to IEC 60947-1	ambience A (industrial sector)
EMC immunity according to IEC 60947-1	ambience A (industrial sector)
Connections/ Terminals	
product component removable terminal for main circuit	No
product component removable terminal for auxiliary and control circuit	Yes
type of electrical connection	
<ul style="list-style-type: none"> for main current circuit 	spring-loaded terminals
<ul style="list-style-type: none"> for auxiliary and control circuit 	spring-loaded terminals
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> for main contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing — finely stranded without core end processing 	2x (1 ... 2.5 mm ²), 2x (2.5 ... 10 mm ²) 2x (1 ... 2.5 mm ²), 2x (2.5 ... 6 mm ²), 1x 10 mm ² 1x (1 ... 6 mm ²)
<ul style="list-style-type: none"> at AWG cables for main contacts 	2 x (16 ... 14), 2x (14 ... 8)
connectable conductor cross-section for main contacts	
<ul style="list-style-type: none"> solid or stranded 	1 ... 10 mm ²
<ul style="list-style-type: none"> finely stranded with core end processing 	1 ... 6 mm ²
<ul style="list-style-type: none"> finely stranded without core end processing 	1 ... 6 mm ²
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> for auxiliary contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing — finely stranded without core end processing 	1x (0.5 ... 4 mm ²), 2x (0.5 ... 2.5 mm ²) 2x (0.25 ... 1.5 mm ²) 2x (0.25 ... 1.5 mm ²)
<ul style="list-style-type: none"> at AWG cables for auxiliary contacts 	2x (24 ... 16)
AWG number as coded connectable conductor cross section for main contacts	18 ... 8
tightening torque with screw-type terminals	0.8 ... 1.2 N·m
Installation/ mounting/ dimensions	
mounting position	any
fastening method	direct mounting
height	109 mm

width	45 mm
depth	92 mm
required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards 0 mm — backwards 0 mm — upwards 0 mm — downwards 0 mm — at the side 0 mm • for grounded parts <ul style="list-style-type: none"> — forwards 6 mm — backwards 0 mm — upwards 6 mm — at the side 6 mm — downwards 6 mm • for live parts <ul style="list-style-type: none"> — forwards 6 mm — backwards 0 mm — upwards 6 mm — downwards 6 mm — at the side 6 mm 	

Ambient conditions	
installation altitude at height above sea level maximum	2 000 m
ambient temperature	
<ul style="list-style-type: none"> • during operation -25 ... +60 °C • during storage -40 ... +80 °C 	

Certificates/ approvals

General Product Approval



[Confirmation](#)



[Manufacturer Declaration](#)



EMC	Declaration of Conformity	Test Certificates	Marine / Shipping
------------	----------------------------------	--------------------------	--------------------------



EG-Konf.

[Type Test Certificates/Test Report](#)

[Special Test Certificate](#)



ABS



LRS

Marine / Shipping	other
--------------------------	--------------



PRS



RINA



DNV-GL

[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RR2442-2AA40>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RR2442-2AA40>



Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<https://support.industry.siemens.com/cs/ww/en/ps/3RR2442-2AA40>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)

Characteristic: Derating

<https://support.industry.siemens.com/cs/ww/en/ps/3RR2442-2AA40/manual>

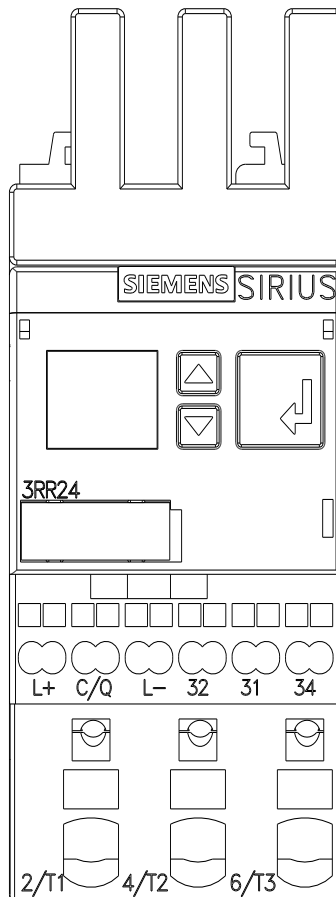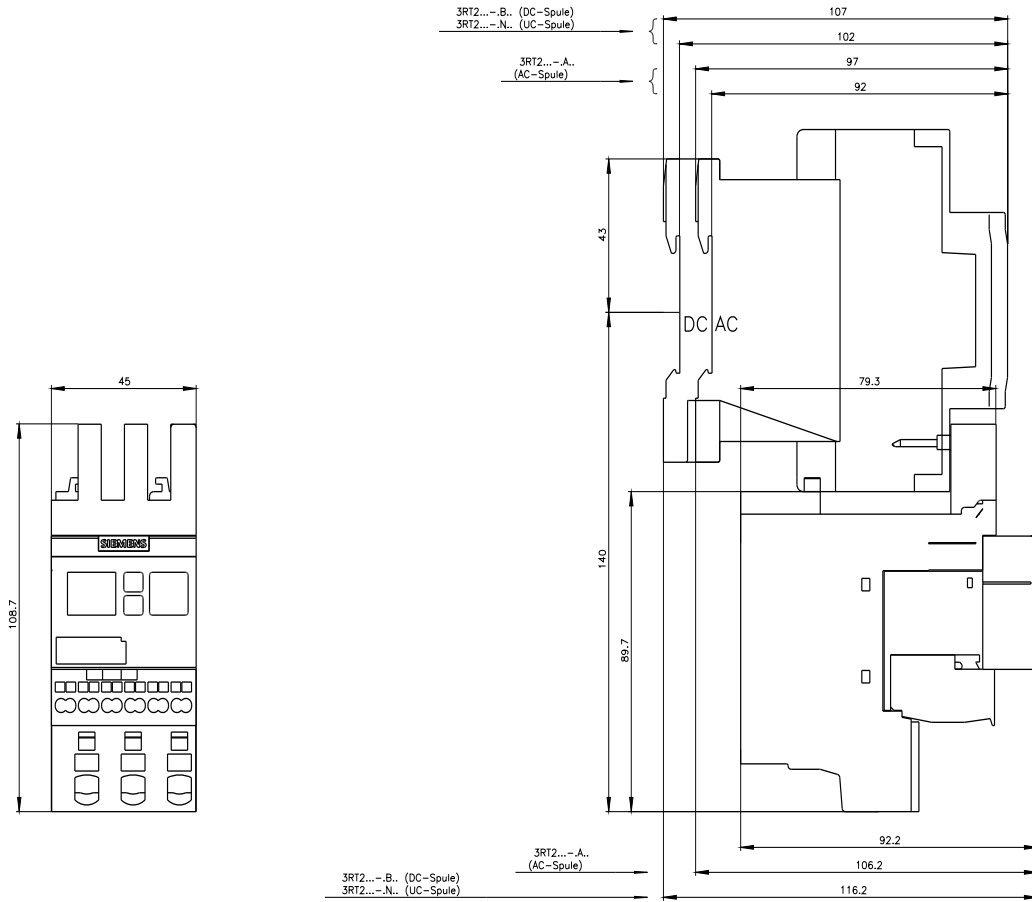

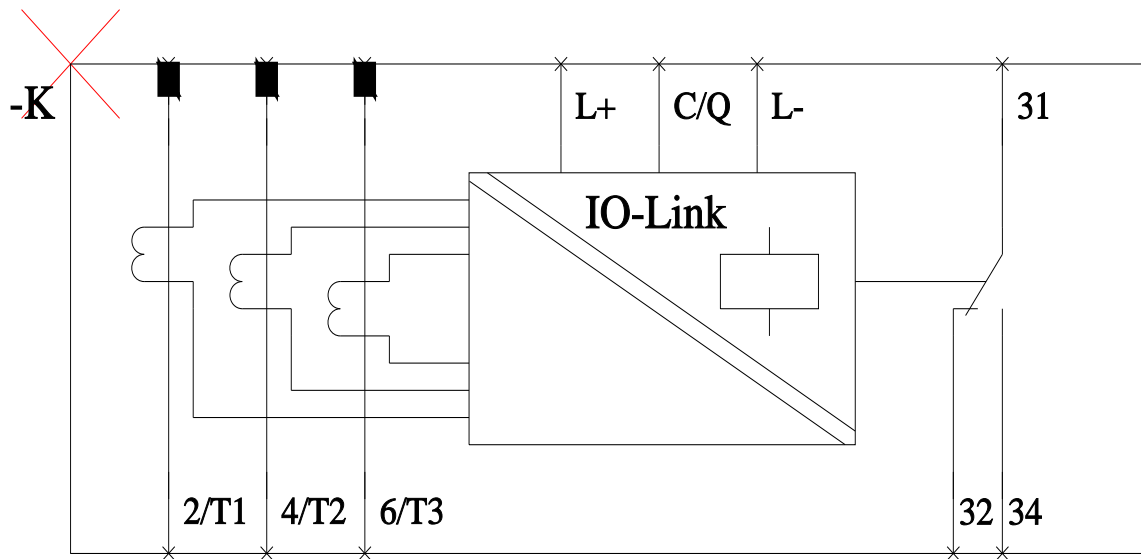

last modified:

12/21/2020 