



Safety position switch with tumbler Locking force 1300 N 5 directions of approach Spring-locked Front auxiliary release Magnet voltage 24 V DC Monitoring actuator 2 NC/1 NO Monitoring magnet 2 NC/1 NO Use for -40 °C, vibration and shock test according to EN 61373. Supplied without actuator, Actuator 3SE5000-0AV../-0AW5. Please order separately

product brand name	SIRIUS
product designation	Mechanical safety switches
design of the product	with separate actuator and with tumbler
product type designation	3SE5
manufacturer's article number	3SE5000-0AV01 standard actuator, 3SE5000-0AV02 actuator with vertical fixing, 3SE5000-0AV03 actuator with transverse fixing, 3SE5000-0AV04 radius actuator, approach from left, 3SE5000-0AV05 universal actuator, 3SE5000-0AV06 radius actuator, approach from right, 3SE5000-0AV07 Heavy Duty actuator, 3SE5000-0AW42 actuator with vertical fixing, stainless steel socket, 3SE5000-0AW43 actuator with transverse fixing, stainless steel socket, 3SE5000-0AW51 stainless steel actuator, 3SE5000-0AW52 stainless steel actuator with vertical fixing, 3SE5000-0AW53 stainless steel actuator with transverse fixing
<ul style="list-style-type: none"> <li>of the optional actuators</li> </ul>	
suitability for use safety switch	Yes

General technical data	
product function	Yes
<ul style="list-style-type: none"> <li>positive opening</li> </ul>	
insulation voltage	

<ul style="list-style-type: none"> <li>• rated value</li> </ul>	250 V
<b>degree of pollution</b>	class 3
<b>surge voltage resistance rated value</b>	4 kV
<b>protection class IP</b>	IP66/IP67
<b>shock resistance</b>	30g / 11 ms
<ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-27</li> <li>• for railway applications acc. to DIN EN 61373</li> </ul>	30g / 11 ms Category 1, Class B
<b>vibration resistance</b>	0.35 mm / 5g
<ul style="list-style-type: none"> <li>• acc. to IEC 60068-2-6</li> </ul>	0.35 mm/5g
<b>mechanical service life (switching cycles)</b>	
<ul style="list-style-type: none"> <li>• typical</li> </ul>	1 000 000
<b>electrical endurance (switching cycles) with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026 typical</b>	1 000 000
<b>Electrical operating cycles in one hour with contactor 3RH11, 3RT1016, 3RT1017, 3RT1024, 3RT1025, 3RT1026</b>	6 000
<b>thermal current</b>	10 A
<b>material of the enclosure of the switch head</b>	plastic
<b>reference code acc. to DIN EN 81346-2</b>	B
<b>continuous current of the C characteristic MCB</b>	1 A; for a short-circuit current smaller than 400 A
<b>continuous current of the quick DIAZED fuse link</b>	10 A; for a short-circuit current smaller than 400 A
<b>continuous current of the DIAZED fuse link gG</b>	6 A; for a short-circuit current smaller than 400 A
<b>locking force</b>	1 300 N
<ul style="list-style-type: none"> <li>• acc. to DIN EN ISO 14119</li> </ul>	1 000 N
<b>repeat accuracy</b>	0.05 mm
<b>minimum actuating force in activation direction</b>	30 N
<b>length of the sensor</b>	185 mm
<b>width of the sensor</b>	54 mm
<ul style="list-style-type: none"> <li>• operating current at AC-15 at 24 V rated value</li> <li>• operating current at AC-15 at 120 V rated value</li> <li>• operating current at AC-15 at 240 V rated value</li> </ul>	6 A 6 A 3 A
<b>operating current at DC-13</b>	
<ul style="list-style-type: none"> <li>• at 24 V rated value</li> <li>• at 125 V rated value</li> <li>• at 250 V rated value</li> </ul>	3 A 0.55 A 0.27 A
design of the interface for safety-related communication	without

#### Enclosure

<b>design of the housing</b>	special design
<b>material of the enclosure</b>	plastic
<b>design of the housing acc. to standard</b>	No

#### Drive Head

design of the operating mechanism	5 directions of approach
design of the switching function	positive opening
number of actuation directions	5
circuit principle	slow-action contacts
number of switching contacts safety-related	4

### Connections/ Terminals

type of electrical connection	screw-type terminals
type of connectable conductor cross-sections	
<ul style="list-style-type: none"> <li>• solid</li> </ul>	1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 0.75 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded with core end processing</li> </ul>	1x (0.5 ... 1.5 mm <sup>2</sup> ), 2x (0.5 ... 0.75 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• at AWG conductors solid</li> </ul>	1x (20 ... 16), 2x (20 ... 18)
<ul style="list-style-type: none"> <li>• at AWG conductors stranded</li> </ul>	1x (20 ... 16), 2x (20 ... 18)
cable entry type	3 x (M20 x 1.5)
locking mechanism design	spring-actuated lock (closed-circuit principle) with auxiliary release

### Communication/ Protocol

design of the interface	without
-------------------------	---------

### Ambient conditions

explosion protection category for dust	none
--	------

### Supply voltage

supply voltage of magnet coil	24 V
-------------------------------	------

### Installation/ mounting/ dimensions

mounting position	any
<ul style="list-style-type: none"> <li>• mounting type</li> </ul>	screw fixing

### Certificates/ approvals

General Product Approval			Declaration of Conformity		
				<a href="#">Miscellaneous</a>	
CCC	CSA	UL			EG-Konf.

Test Certificates	other
<a href="#">Type Test Certificates/Test Report</a>	<a href="#">Confirmation</a>

### Further information

Information- and Downloadcenter (Catalogs, Brochures,...)  
<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mfb=3SE5322-0SD21-1AJ0>

**Cax online generator**


<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mfb=3SE5322-0SD21-1AJ0>


**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**



<https://support.industry.siemens.com/cs/ww/en/ps/3SE5322-0SD21-1AJ0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mfb=3SE5322-0SD21-1AJ0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mfb=3SE5322-0SD21-1AJ0&lang=en)

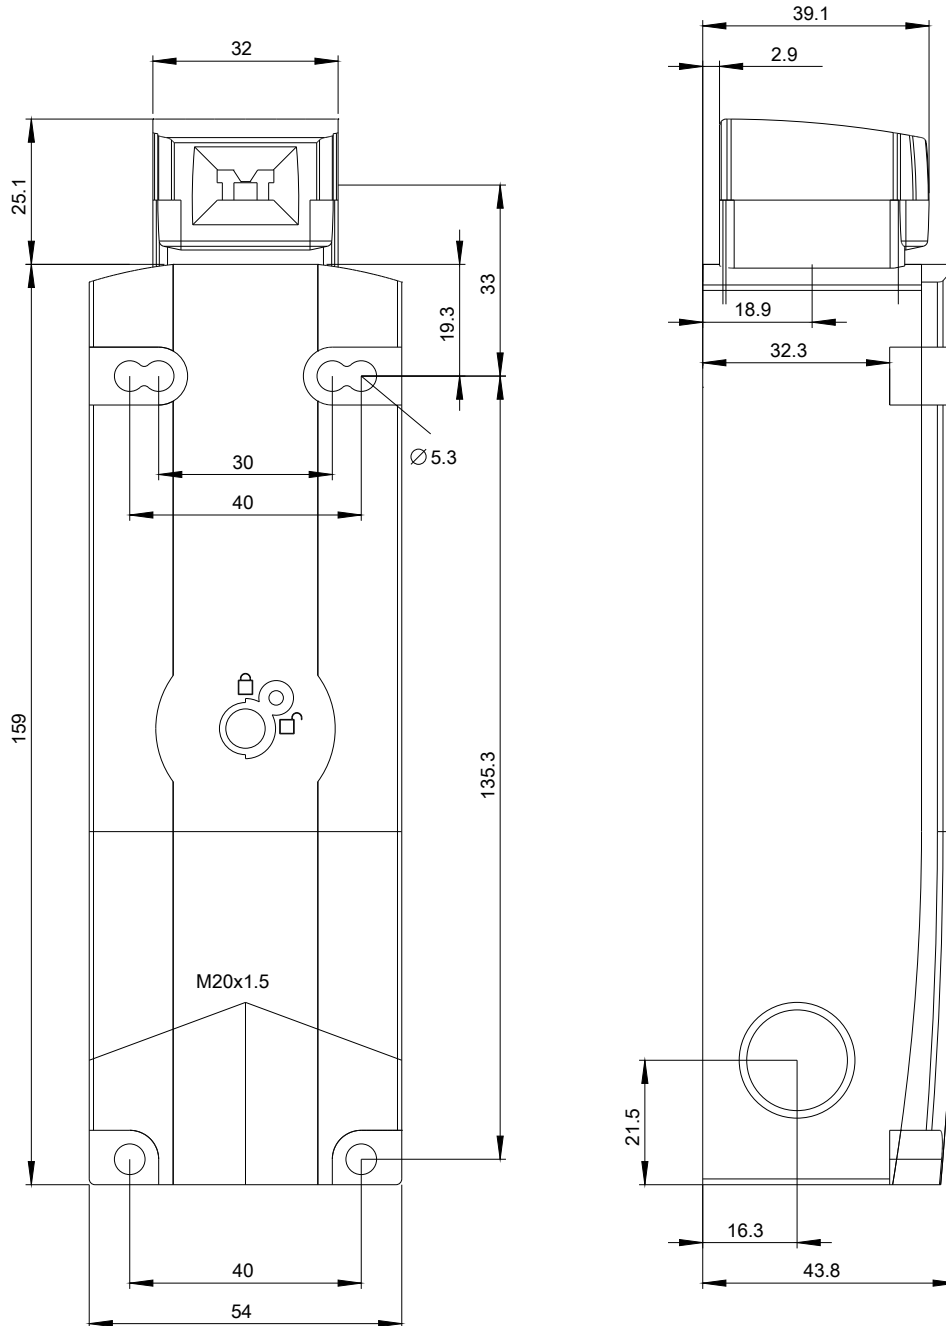

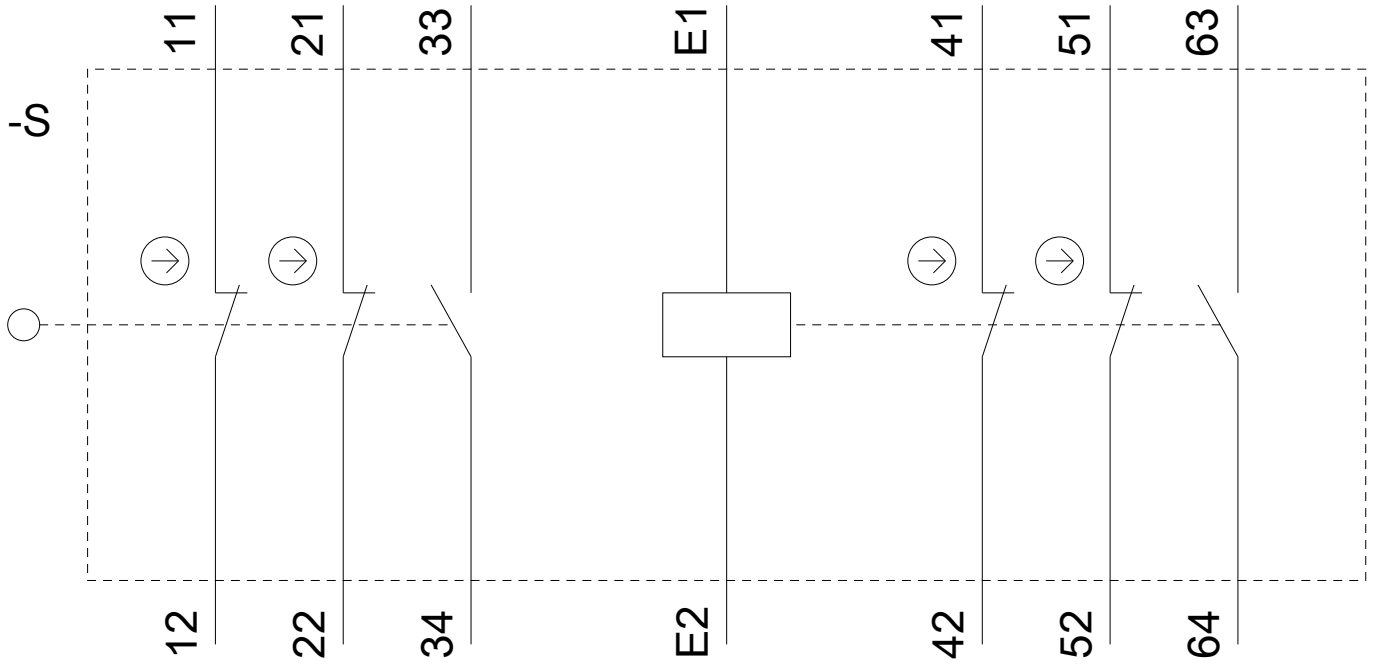

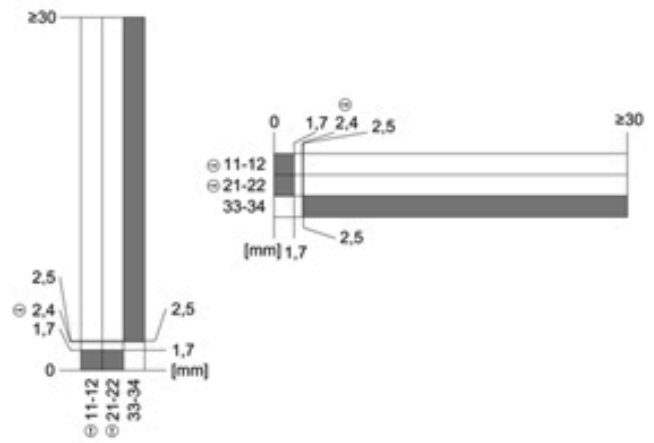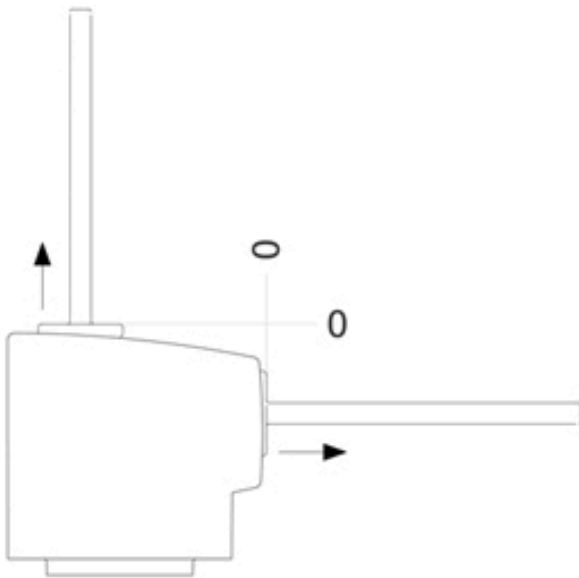

last modified:

09/29/2020