

Contactor, Size 14, 3-pole, AC-3, 450 kW, 400/380 V (1000 V)
 Auxiliary switch 33 (3 NO+3 NC) with reversing contactor 3TC4417-4A and series resistor DC economy circuit 220 V DC



Product designation	Vacuum contactor
Product type designation	3TF6
General technical data	
Size of contactor	14
Product extension	
<ul style="list-style-type: none"> • function module for communication • Auxiliary switch 	No
<ul style="list-style-type: none"> • Insulation voltage of main circuit with degree of pollution 3 rated value • Insulation voltage of auxiliary circuit with degree of pollution 3 rated value 	1 000 V 690 V
Surge voltage resistance	
<ul style="list-style-type: none"> • of main circuit rated value • of auxiliary circuit rated value 	8 kV 6 kV
maximum permissible voltage for safe isolation in networks with grounded star point	
<ul style="list-style-type: none"> • between auxiliary and auxiliary circuit • between main and auxiliary circuit • protection class IP on the front 	300 V 500 V IP00

Shock resistance at rectangular impulse	
• at DC	8.6g / 5 ms, 5.1g / 10 ms
Shock resistance with sine pulse	
• at DC	13.5 g / 5 ms, 7.8 g / 10 ms
Mechanical service life (switching cycles)	
• of contactor typical	5 000 000
Reference code acc. to DIN EN 81346-2	Q

Ambient conditions

Installation altitude at height above sea level	
• maximum	2 000 m
Ambient temperature	
• during operation	-25 ... +55 °C
• during storage	-55 ... +80 °C
Relative humidity during operation	10 ... 100 %

Main circuit

Number of poles for main current circuit	3
Number of NO contacts for main contacts	3
Number of NC contacts for main contacts	0
Type of voltage for main current circuit	AC
Operating voltage	
• at AC	
— at 50 Hz rated value	1 000 V
— at 60 Hz rated value	1 000 V
Operating current	
• at AC-1	
— up to 690 V at ambient temperature 40 °C rated value	910 A
— up to 690 V at ambient temperature 55 °C rated value	850 A
— up to 1000 V at ambient temperature 55 °C rated value	800 A
• at AC-3	
— at 400 V rated value	820 A
— at 500 V rated value	820 A
— at 690 V rated value	820 A
— at 1000 V rated value	580 A
• at AC-4 at 400 V rated value	690 A
• at AC-6a	
— up to 500 V for current peak value n=20 rated value	675 A
— up to 690 V for current peak value n=20 rated value	675 A

<ul style="list-style-type: none"> — up to 1000 V for current peak value n=20 rated value 	580 A
<ul style="list-style-type: none"> • at AC-6a <ul style="list-style-type: none"> — up to 400 V for current peak value n=30 rated value — up to 500 V for current peak value n=30 rated value — up to 690 V for current peak value n=30 rated value — up to 1000 V for current peak value n=30 rated value 	450 A
<ul style="list-style-type: none"> — up to 500 V for current peak value n=30 rated value 	450 A
<ul style="list-style-type: none"> — up to 690 V for current peak value n=30 rated value 	450 A
<ul style="list-style-type: none"> — up to 1000 V for current peak value n=30 rated value 	450 A
Connectable conductor cross-section in main circuit at AC-1	
<ul style="list-style-type: none"> • at 40 °C minimum permissible 	600 mm ²
Operating current for approx. 200000 operating cycles at AC-4	
<ul style="list-style-type: none"> • at 400 V rated value 	360 A
<ul style="list-style-type: none"> • at 690 V rated value 	360 A
Operating power	
<ul style="list-style-type: none"> • at AC-3 <ul style="list-style-type: none"> — at 230 V rated value — at 400 V rated value — at 690 V rated value — at 1000 V rated value 	260 kW
	450 kW
	800 kW
	800 kW
Operating apparent output at AC-6a	
<ul style="list-style-type: none"> • up to 400 V for current peak value n=20 rated value 	445 kV·A
<ul style="list-style-type: none"> • up to 690 V for current peak value n=20 rated value 	771 kV·A
<ul style="list-style-type: none"> • up to 1000 V for current peak value n=20 rated value 	1 003 kV·A
Operating apparent output at AC-6a	
<ul style="list-style-type: none"> • up to 400 V for current peak value n=30 rated value 	297 kV·A
<ul style="list-style-type: none"> • up to 690 V for current peak value n=30 rated value 	514 kV·A
<ul style="list-style-type: none"> • up to 1000 V for current peak value n=30 rated value 	778 kV·A
Thermal short-time current limited to 10 s	7 000 A
Power loss [W] at AC-3 at 400 V for rated value of the operating current per conductor	70 W
No-load switching frequency at AC	1 000 1/h
Operating frequency	
<ul style="list-style-type: none"> • at AC-1 maximum 	700 1/h

- at AC-2 at AC-3 maximum

200 1/h

Control circuit/ Control

Type of voltage of the control supply voltage	DC
Control supply voltage at DC	
• rated value	220 V
Operating range factor control supply voltage rated value of magnet coil at DC	
• initial value	0.8
• Full-scale value	1.1
Closing power of magnet coil at DC	960 W
Holding power of magnet coil at DC	20.6 W
Closing delay	
• at DC	90 ... 125 ms
Opening delay	
• at DC	19 ... 25 ms
Arcing time	10 ... 15 ms
Control version of the switch operating mechanism	Standard A1 - A2

Auxiliary circuit

Number of NC contacts for auxiliary contacts	
• attachable	3
• instantaneous contact	3
Number of NO contacts for auxiliary contacts	
• attachable	3
• instantaneous contact	3
Operating current at AC-12 maximum	10 A
Operating current at AC-15	
• at 230 V rated value	5.6 A
• at 400 V rated value	3.6 A
• at 500 V rated value	2.5 A
• at 690 V rated value	2.3 A
Operating current at DC-12 at 440 V rated value	0.33 A
Operating current at DC-12	
• at 24 V rated value	10 A
• at 48 V rated value	10 A
• at 110 V rated value	3.2 A
• at 125 V rated value	2.5 A
• at 220 V rated value	0.9 A
• at 600 V rated value	0.22 A
Operating current at DC-13	
• at 24 V rated value	10 A
• at 48 V rated value	5 A

<ul style="list-style-type: none"> • at 110 V rated value • at 125 V rated value • at 220 V rated value • at 600 V rated value 	<p>1.14 A</p> <p>0.98 A</p> <p>0.48 A</p> <p>0.07 A</p>
contact reliability of auxiliary contacts	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)

UL/CSA ratings	
Full-load current (FLA) for three-phase AC motor	
<ul style="list-style-type: none"> • at 480 V rated value • at 600 V rated value 	<p>820 A</p> <p>820 A</p>
Yielded mechanical performance [hp]	
<ul style="list-style-type: none"> • for three-phase AC motor <ul style="list-style-type: none"> — at 200/208 V rated value — at 220/230 V rated value — at 460/480 V rated value — at 575/600 V rated value 	<p>290 hp</p> <p>350 hp</p> <p>700 hp</p> <p>860 hp</p>
Contact rating of auxiliary contacts according to UL	A600 / Q600

Short-circuit protection	
Design of the fuse link	
<ul style="list-style-type: none"> • for short-circuit protection of the main circuit <ul style="list-style-type: none"> — with type of coordination 1 required — with type of assignment 2 required • for short-circuit protection of the auxiliary switch required 	<p>gG: 1250 A (690 V, 100 kA)</p> <p>gG: 630 A (690 V, 50 kA), aM: 630 A (690 V, 50 kA), BS88: 630 A (690 V, 50 kA)</p> <p>fuse gG: 10 A</p>

Installation/ mounting/ dimensions	
<ul style="list-style-type: none"> • mounting position 	with vertical mounting surface +/-90° rotatable, with vertical mounting surface +/- 22.5° tiltable to the front and back
Mounting type	screw fixing
<ul style="list-style-type: none"> • Side-by-side mounting 	Yes
Height	295 mm
Width	230 mm
Depth	237 mm
Required spacing	
<ul style="list-style-type: none"> • with side-by-side mounting <ul style="list-style-type: none"> — forwards — upwards — downwards — at the side • for grounded parts <ul style="list-style-type: none"> — forwards 	<p>20 mm</p> <p>10 mm</p> <p>10 mm</p> <p>10 mm</p> <p>20 mm</p>

— upwards	10 mm
— at the side	10 mm
— downwards	10 mm
• for live parts	
— forwards	20 mm
— upwards	10 mm
— downwards	10 mm
— at the side	10 mm

Connections/ Terminals

Width of connection bar	40 mm
Thickness of connection bar	6 mm
Diameter of holes	13.5 mm
Number of holes	1
<ul style="list-style-type: none"> • Type of electrical connection for main current circuit • Type of electrical connection for auxiliary and control current circuit • Type of electrical connection at contactor for auxiliary contacts 	<p>Connection bar</p> <p>screw-type terminals</p> <p>Screw-type terminals</p>
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for main contacts <ul style="list-style-type: none"> — stranded — finely stranded with core end processing • at AWG conductors for main contacts 	<p>50 ... 240 mm²</p> <p>50 ... 240 mm²</p> <p>2/0 ... 500 kcmil</p>
Connectable conductor cross-section for main contacts	
<ul style="list-style-type: none"> • finely stranded with core end processing 	240 ... 50 mm ²
Connectable conductor cross-section for auxiliary contacts	
<ul style="list-style-type: none"> • single or multi-stranded • finely stranded with core end processing 	<p>0.5 ... 2.5 mm²</p> <p>0.5 ... 2.5 mm²</p>
Type of connectable conductor cross-sections	
<ul style="list-style-type: none"> • for auxiliary contacts <ul style="list-style-type: none"> — solid — finely stranded with core end processing • at AWG conductors for auxiliary contacts 	<p>2x (0.5 ... 1.0 mm²), 2x (1.0 ... 2.5 mm²)</p> <p>2x (0.5 ... 1.0 mm²), 2x (0.75 ... 2.5 mm²)</p> <p>2x (18 ... 12)</p>
AWG number as coded connectable conductor cross section	
<ul style="list-style-type: none"> • for main contacts • for auxiliary contacts 	<p>500</p> <p>18 ... 12</p>

Safety related data



Product function


- Mirror contact acc. to IEC 60947-4-1
- positively driven operation acc. to IEC 60947-5-1

Yes; One NC contact each must be connected in series for the right and left auxiliary switch block respectively
No

Certificates/ approvals

General Product Approval				Functional Safety/Safety of Machinery	Declaration of Conformity
				Type Examination Certificate	
CCC	CSA	UL			EG-Konf.

Declaration of Conformity	Test Certificates			Marine / Shipping	
Miscellaneous	Type Test Certificates/Test Report	Special Test Certificate	Miscellaneous		
				BUREAU VERITAS	RMRS

Marine / Shipping	other	Railway	
	Miscellaneous	Confirmation	Special Test Certificate
DNV-GL DNVGL.COM/AF			

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<https://www.siemens.com/ic10>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3TF6933-8DM4>

Cax online generator

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3TF6933-8DM4>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3TF6933-8DM4>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)




http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3TF6933-8DM4&lang=en

Characteristic: Tripping characteristics, I^t, Let-through current

<https://support.industry.siemens.com/cs/ww/en/ps/3TF6933-8DM4/char>

Further characteristics (e.g. electrical endurance, switching frequency)

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3TF6933-8DM4&objecttype=14&gridview=view1>

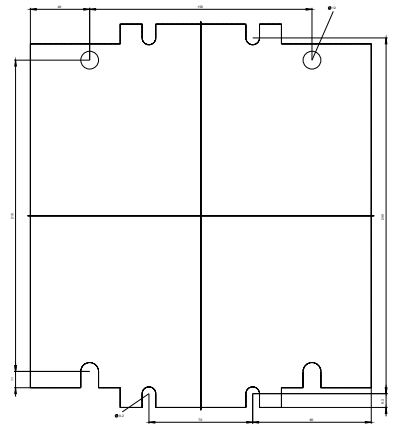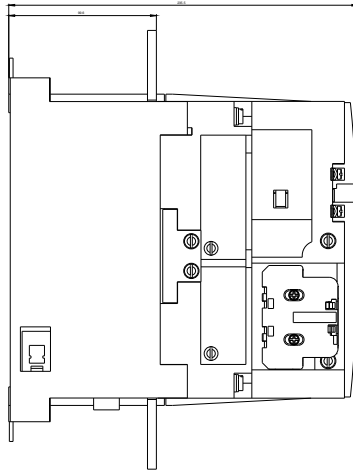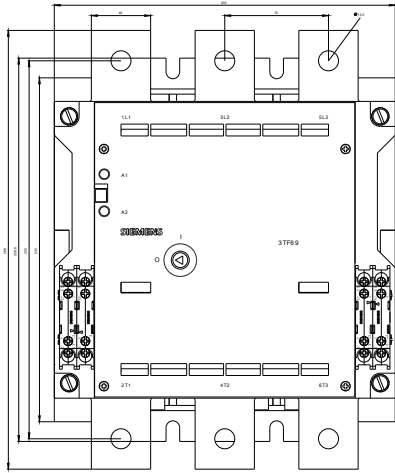

last modified:

08/13/2020