


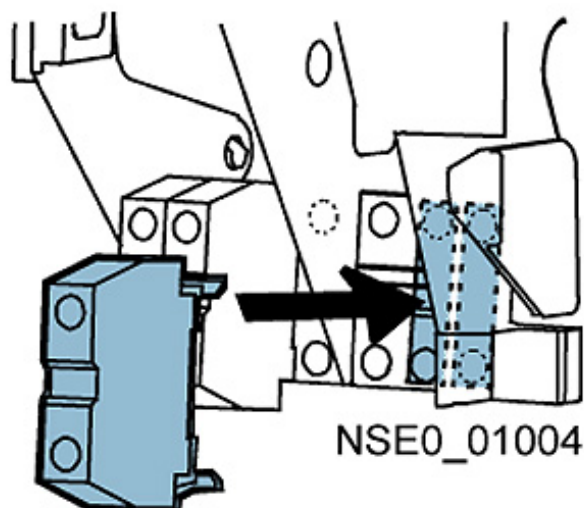

Model	
product brand name	SENTRON
Design of the product	Accessories
General technical data	
Degree of pollution	3
Voltage	
Surge voltage resistance / rated value	4 kV
Supply voltage	
Operating voltage	
• at AC / at 50 Hz / rated value / maximum	500 V
• at DC / rated value / maximum	500 V
Current	
Operating current	
• at AC-12 / at 110 V / rated value	10 A
• at AC-12 / at 24 V / rated value	10 A
• at AC-12 / at 48 V / rated value	10 A
• at AC-12 / at 400 V / rated value	10 A

• at AC-12 / at 230 V / rated value	10 A
• at AC-15 / at 24 V / rated value	4 A
• at AC-15 / at 48 V / rated value	4 A
• at AC-15 / at 110 V / rated value	4 A
• at AC-15 / at 230 V / rated value	4 A
• at AC-15 / at 400 V / rated value	3 A
• at DC-12 / at 230 V / rated value	1 A
• at DC-13 / at 220 V / rated value	0.4 A
• at DC-12 / at 110 V / rated value	3.5 A
• at DC-12 / at 48 V / rated value	8 A
• at DC-13 / at 110 V / rated value	1.2 A
• at DC-13 / at 48 V / rated value	4 A
• at DC-12 / at 24 V / rated value	10 A
• at DC-13 / at 24 V / rated value	8 A

Certificates

Declaration of Conformity	Test Certificates	other		
 EG-Konf.	Miscellaneous	Environmental Con- firmations	Manufacturer De- claration	Miscellaneous

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3WL9111-0AG03-0AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/3WL9111-0AG03-0AA0>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL9111-0AG03-0AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>