

Auxiliary current switch 2 NO for circuit breaker 5SL, 5SY, 5SP
 Incorporated switch 5TL1, RCBO 5SU1, FI 5SV (for 5SU1 handle coupler 5ST3805-1 is required)



Model	
product brand name	SENTRON
Product designation	Auxiliary current switch
Design of the product	Mountable
Electrical endurance (switching cycles) / typical	20 000
Voltage	
Insulation voltage / rated value	440 V
Surge voltage resistance / rated value	4 kV
Supply voltage	
Operating frequency	50/60 Hz
Protection class IP	IP20
Product details	
Product component	
• Auxiliary switch	Yes
Number of fault signal contacts	0
Number of NC contacts	0
Number of NO contacts	2
Number of CO contacts	0

Product extension	auxiliary switch
-------------------	------------------

Connections

Connectable conductor cross-section	
<ul style="list-style-type: none"> • minimum • maximum 	0.5 mm ² 2.5 mm ²
Tightening torque / with screw-type terminals	
<ul style="list-style-type: none"> • maximum 	0.5 N·m
Type of connectable conductor cross-sections / at AWG conductors	24 ... 12





Mechanical Design


Height	90 mm
Width	9 mm
Depth	70 mm
net weight	66 g

Environmental conditions

Ambient temperature / during operation	
<ul style="list-style-type: none"> • minimum • maximum 	-25 °C 55 °C
Ambient temperature / during storage	
<ul style="list-style-type: none"> • minimum permissible • maximum permissible 	-40 °C 75 °C

Certificates

General Product Approval			Declaration of Conformity	Test Certificates
				
CCC	UR	VDE	EG-Konf.	
			Miscellaneous	Miscellaneous

Shipping Approval	other	Railway
	Miscellaneous	Vibration and Shock
LRS		Confirmation

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=5ST3011>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<https://support.industry.siemens.com/cs/ww/en/ps/5ST3011>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3011

CAx-Online-Generator


<http://www.siemens.com/cax>

Tender specifications

<http://www.siemens.com/specifications>

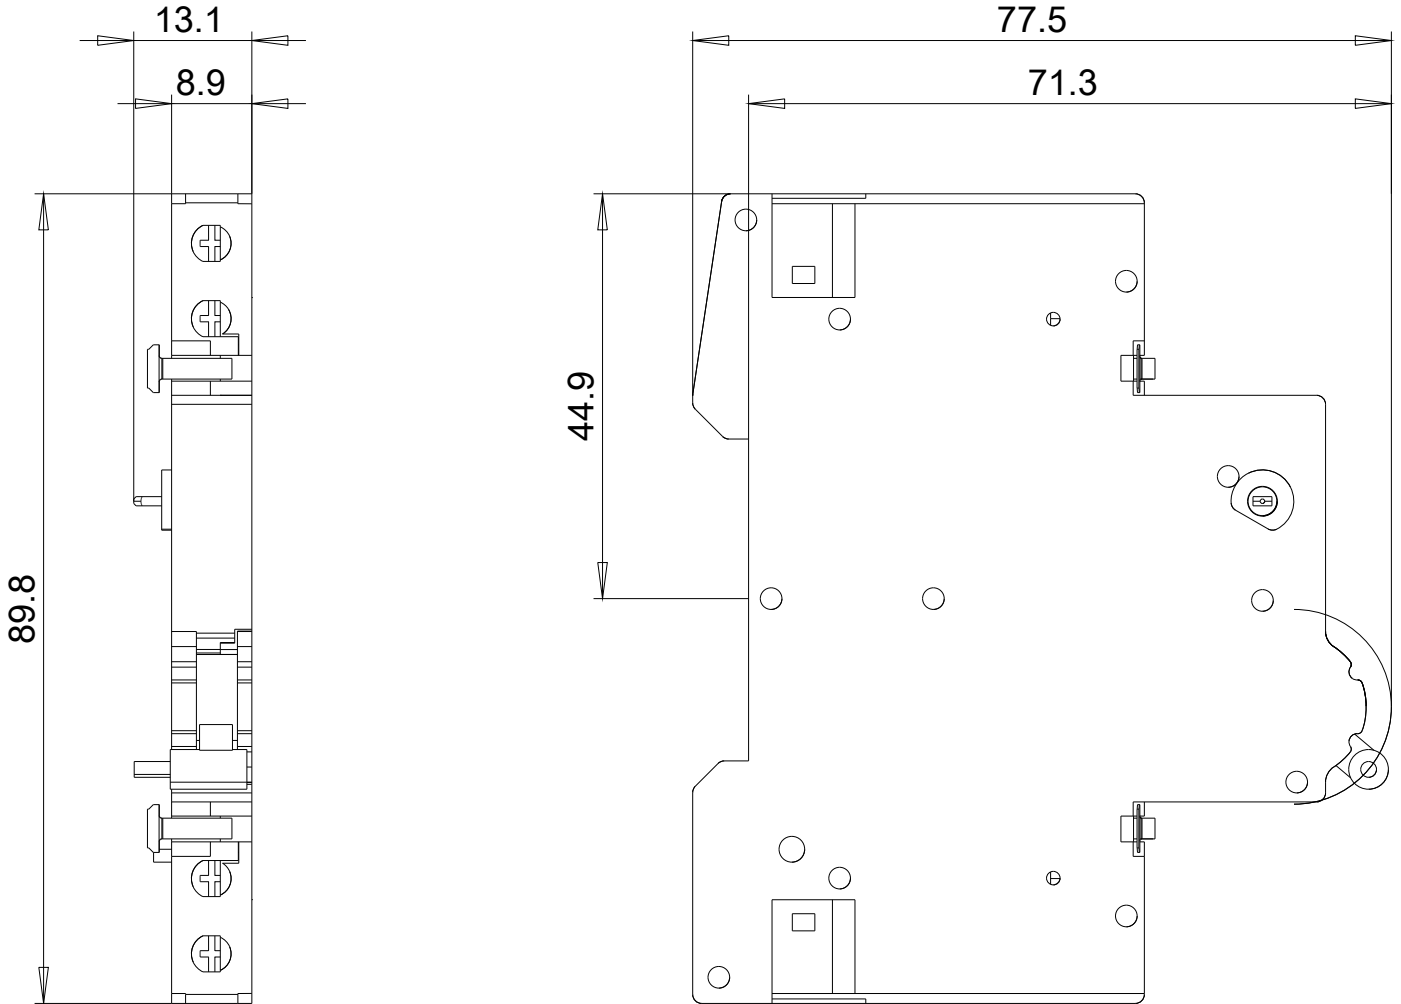

13 | 23

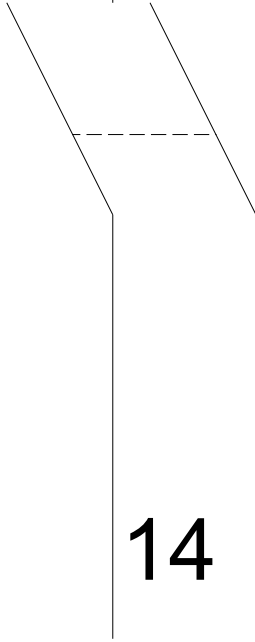

14 | 24

