

Timing relay, electronic OFF delay with control signal, 1 change-over contact 7 time ranges, 0.05 s...100 h 12-240 V AC/DC with LED, Screw terminal



product brand name	SIRIUS
Product designation	timing relay
Design of the product	off-delayed with auxiliary voltage
Product type designation	7PV15

General technical data	
<b>Product component</b>	
<ul style="list-style-type: none"> <li>• semi-conductor output</li> </ul>	No
<b>Product extension required remote control</b>	No
<b>Product extension optional remote control</b>	No
<ul style="list-style-type: none"> <li>• — insulation voltage for overvoltage category III according to IEC 60664 with degree of pollution 3 rated value</li> </ul>	300 V
<b>Test voltage for isolation test</b>	2.2 kV
<b>Degree of pollution</b>	2
<b>Surge voltage resistance rated value</b>	4 000 V
<b>Test voltage for surge voltage test</b>	4 800 V
<ul style="list-style-type: none"> <li>• Protection class IP</li> </ul>	IP20
<b>Shock resistance</b>	

• acc. to IEC 60068-2-27	11g / 15 ms
<b>Vibration resistance</b>	
• acc. to IEC 60068-2-6	10 ... 55 Hz: 0.35 mm
<b>Mechanical service life (switching cycles)</b>	
• typical	10 000 000
<b>Electrical endurance (switching cycles)</b>	
• at AC-15 at 230 V typical	100 000
<b>adjustable time</b>	0.05 s ... 100 h
<b>Relative setting accuracy relating to full-scale value</b>	5 %
<b>minimum ON period</b>	35 ms
• recovery time	500 ms
<b>Reference code acc. to DIN EN 81346-2</b>	K
<b>relative repeat accuracy</b>	2 %

### Control circuit/ Control

<b>Type of voltage of the control supply voltage</b>	AC/DC
<b>Control supply voltage 1 at AC</b>	
• at 50 Hz	12 ... 240 V
• at 60 Hz	12 ... 240 V
<b>control supply voltage frequency 1</b>	50 ... 60 Hz
<b>Control supply voltage 1</b>	
• at DC	12 ... 240 V
<b>operating range factor control supply voltage rated value at DC</b>	
• initial value	0.85
• full-scale value	1.1
<b>operating range factor control supply voltage rated value at AC at 50 Hz</b>	
• initial value	0.85
• full-scale value	1.1
<b>operating range factor control supply voltage rated value at AC at 60 Hz</b>	
• initial value	0.85
• full-scale value	1.1

### Switching Function

• switching function ON-delay	No
• switching function ON-delay/instantaneous contact	No
• switching function passing make contact	No
• switching function passing make contact/instantaneous contact	No
• Switching function OFF delay	No
<b>Switching function</b>	

• flashing symmetrically starting with interval/instantaneous	No
• flashing symmetrically starting with interval	No
• flashing symmetrically starting with pulse/instantaneous	No
• flashing symmetrically starting with pulse	No
• flashing asymmetrically starting with interval	No
• flashing asymmetrically starting with pulse	No
<b>Switching function</b>	
• star-delta circuit with delay time	No
• star-delta circuit	No
• Switching function with control signal additive ON delay	No
• Switching function with control signal passing break contact	No
• Switching function with control signal passing break contact/instantaneous	No
• Switching function with control signal OFF delay	Yes
• Switching function with control signal OFF delay/instantaneous	No
• Switching function with control signal pulse delayed	No
• Switching function with control signal pulse delayed/instantaneous	No
• switching function with control signal pulse-shaping	No
• Switching function with control signal pulse-shaping/instantaneous	No
• Switching function with control signal additive ON delay/instantaneous	No
• Switching function with control signal ON-delay/OFF-delay	No
• Switching function with control signal ON-delay/OFF-delay/instantaneous	No
• Switching function with control signal passing make contact	No
• Switching function with control signal passing make contact/instantaneous contact	No
<b>Switching function of interval relay with control signal</b>	
• retrotriggerable with deactivated control signal/instantaneous contact	No
• retrotriggerable with activated control signal	No
• retrotriggerable with activated control signal/instantaneous contact	No

• retriggerable with deactivated control signal	No
<b>Design of the control terminal non-floating</b>	Yes
<b>Short-circuit protection</b>	
<b>Design of the fuse link</b>	fuse gL/gG: 4 A
• for short-circuit protection of the auxiliary switch required	
<b>Auxiliary circuit</b>	
<b>Material of switching contacts</b>	AgSnO2
<b>Number of NC contacts</b>	
• delayed switching	0
• instantaneous contact	0
<b>Number of NO contacts</b>	
• delayed switching	0
• instantaneous contact	0
<b>Number of CO contacts</b>	
• delayed switching	1
• instantaneous contact	0
• Operating current of auxiliary contacts at AC-15 maximum	3 A
• operating current of auxiliary contacts at AC-15 at 24 V	3 A
• operating current of auxiliary contacts at AC-15 at 250 V	3 A
<b>Operating current of auxiliary contacts as NC contact at AC-15</b>	
• at 24 V	3 A
• at 250 V	3 A
<b>Operating current of auxiliary contacts as NO contact at AC-15</b>	
• at 24 V	3 A
• at 250 V	3 A
<b>Operating current of auxiliary contacts at DC-13</b>	1 ... 0.01
• operating current of auxiliary contacts at DC-13 at 24 V	1 A
• operating current of auxiliary contacts at DC-13 at 125 V	0.22 A
• operating current of auxiliary contacts at DC-13 at 250 V	0.1 A
<b>operating frequency with 3RT2 contactor maximum</b>	5 000 1/h
<b>contact reliability of auxiliary contacts</b>	one incorrect switching operation of 100 million switching operations (17 V, 5 mA)
<b>Contact rating of auxiliary contacts according to UL</b>	R150 / B300
<b>influence of the surrounding temperature</b>	2% in complete temperature range for the set duration

<b>Power supply influence</b>	2% in complete voltage range for the set duration
<b>Switching capacity current with inductive load</b>	0.01 ... 3 A
<b>Inputs/ Outputs</b>	
<ul style="list-style-type: none"> <li>• Product function at the relay outputs Switchover delayed/without delay</li> </ul>	No
<ul style="list-style-type: none"> <li>• Product function non-volatile</li> </ul>	No
<b>Electromagnetic compatibility</b>	
<b>EMI immunity</b>	
<ul style="list-style-type: none"> <li>• acc. to IEC 61812-1</li> </ul>	EN 61000-6-2
<b>Conducted interference</b>	
<ul style="list-style-type: none"> <li>• due to burst acc. to IEC 61000-4-4</li> </ul>	2 kV network connection / 1 kV control connection
<ul style="list-style-type: none"> <li>• due to conductor-earth surge acc. to IEC 61000-4-5</li> </ul>	2 kV
<ul style="list-style-type: none"> <li>• due to conductor-conductor surge acc. to IEC 61000-4-5</li> </ul>	1 kV
<b>Field-bound parasitic coupling acc. to IEC 61000-4-3</b>	10 V/m
<b>Electrostatic discharge acc. to IEC 61000-4-2</b>	4 kV contact discharge / 8 kV air discharge
<b>Safety related data</b>	
<b>Protection against electrical shock</b>	finger-safe
<b>Type of insulation</b>	Basic insulation
<b>Category acc. to EN 954-1</b>	none
<b>Connections/ Terminals</b>	
<b>Product function</b>	
<ul style="list-style-type: none"> <li>• removable terminal for auxiliary and control circuit</li> </ul>	No
<ul style="list-style-type: none"> <li>• Type of electrical connection for auxiliary and control current circuit</li> </ul>	screw-type terminals
<ul style="list-style-type: none"> <li>• type of connectable conductor cross-sections solid</li> </ul>	1x (0.2 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• Type of connectable conductor cross-sections finely stranded with core end processing</li> </ul>	1x (0.25 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• Type of connectable conductor cross-sections finely stranded without core end processing</li> </ul>	1x (0.2 ... 1.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• Type of connectable conductor cross-sections at AWG conductors solid</li> </ul>	1x (24 ... 14)
<ul style="list-style-type: none"> <li>• Type of connectable conductor cross-sections at AWG conductors stranded</li> </ul>	1x (24 ... 14)
<ul style="list-style-type: none"> <li>• connectable conductor cross-section solid</li> </ul>	0.2 ... 2.5 m <sup>2</sup>
<ul style="list-style-type: none"> <li>• connectable conductor cross-section finely stranded with core end processing</li> </ul>	0.25 ... 1.5 m <sup>2</sup>
<ul style="list-style-type: none"> <li>• connectable conductor cross-section finely stranded without core end processing</li> </ul>	0.2 ... 1.5 m <sup>2</sup>

<b>AWG number as coded connectable conductor cross section</b>	
• solid	24 ... 14
• stranded	24 ... 14

### Installation/ mounting/ dimensions

• <b>mounting position</b>	any
<b>Mounting type</b>	snap-on fastening on 35 mm standard rail
<b>Height</b>	90 mm
<b>Width</b>	17.5 mm
<b>Depth</b>	66.7 mm
<b>Required spacing</b>	
• with side-by-side mounting	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	0 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm

### Ambient conditions

<b>Installation altitude at height above sea level</b>	
• maximum	2 000 m
<b>Ambient temperature</b>	
• during operation	-25 ... +55 °C
• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
• Relative humidity during operation	15 ... 85 %

### Certificates/ approvals

General Product Approval	EMC	Declaration of Conformity
--------------------------	-----	---------------------------



CCC



UL



RCM



EG-Konf.

[Miscellaneous](#)

Test Certificates	other
-------------------	-------

[Type Test Certificates/Test Report](#)

[Confirmation](#)

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<https://www.siemens.com/ic10>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=7PV1538-1AW30>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=7PV1538-1AW30>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<https://support.industry.siemens.com/cs/ww/en/ps/7PV1538-1AW30>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=7PV1538-1AW30&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=7PV1538-1AW30&lang=en)

**Characteristic: Derating**


<https://support.industry.siemens.com/cs/ww/en/ps/7PV1538-1AW30/manual>

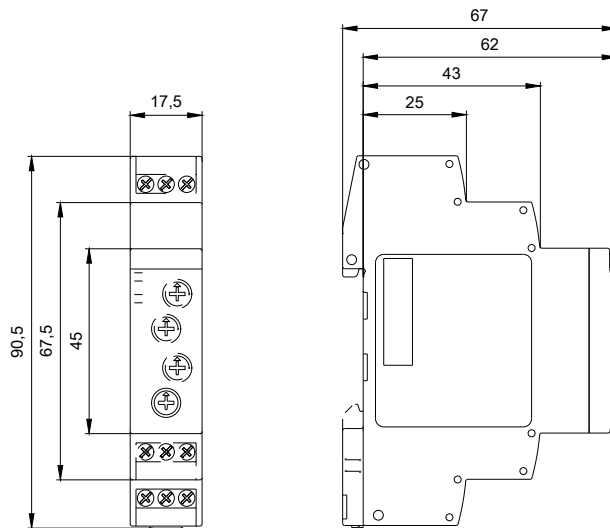

Alle Bemessungswerte sind in Millimeter (mm) angegeben  
 All dimensions are in millimeters (mm)





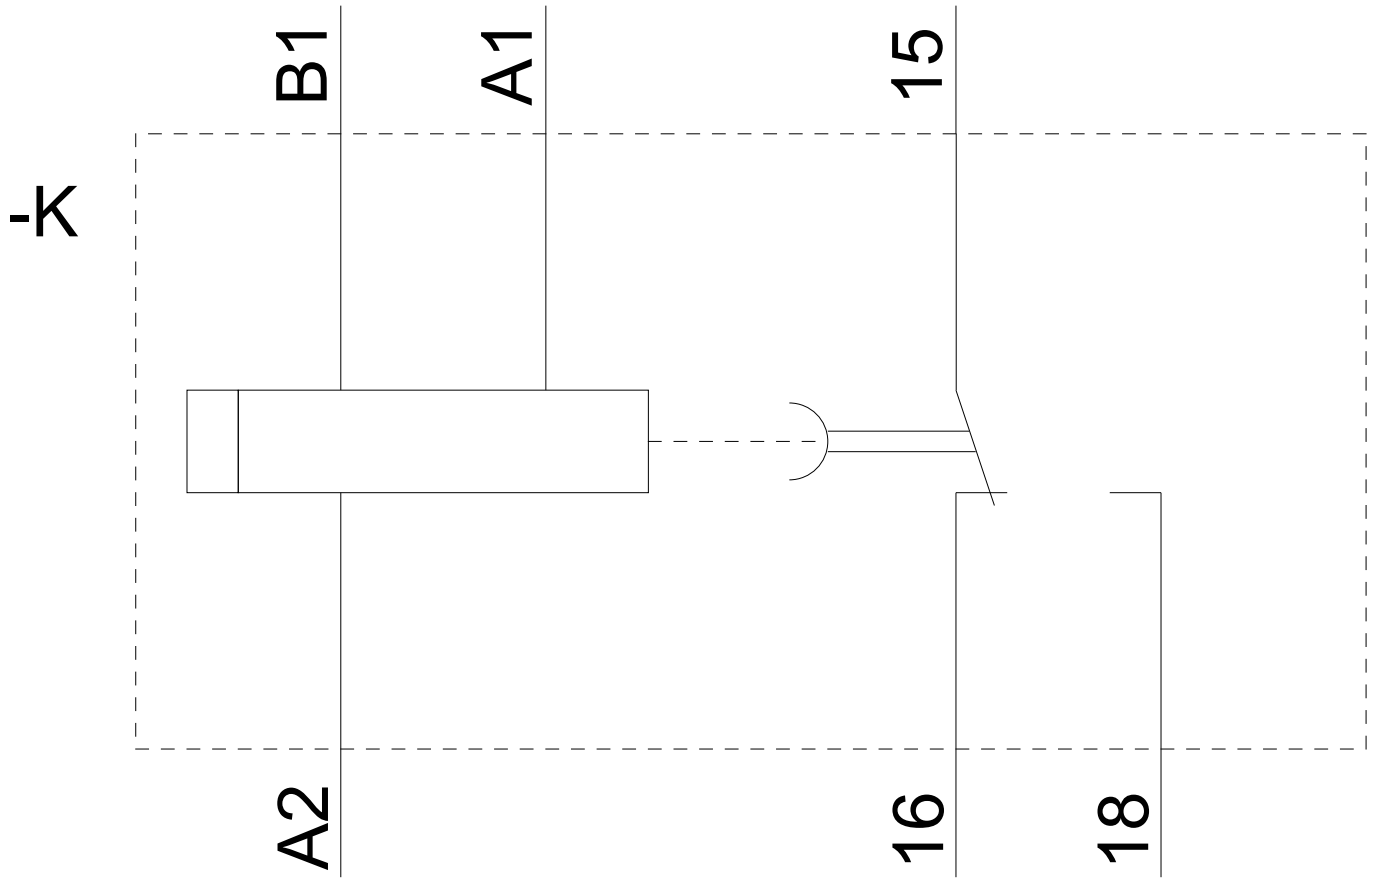

last modified:

08/14/2020