


## EX-KVM-24-W-16

Ex-EMC Cable gland hexagonal, brass, M24



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

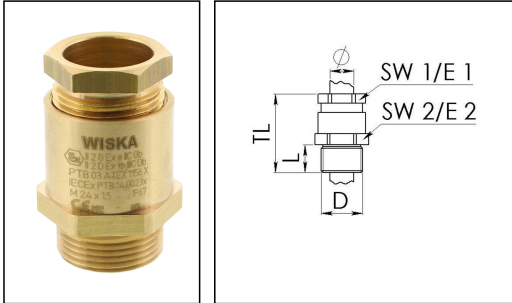

Material cable gland	Brass
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	120 °C
Protection class	IP66 / IP67
Type of protection	Ex e, Ex tb
Ex-Certificate	IECEx, ATEX
Thread type	M
Ø Connection thread D	24
Lead	1,5
Length screw-in thread L	11 mm
Ø cable diameter min	14 mm
Ø cable diameter max	16,5 mm
Key width SW1	24 mm
Key width SW	29 mm
Key width SW2	29 mm
Collar diameter E1	27 mm
Collar diameter E2	32 mm
Total length TL	43 mm - 47 mm
Install. torques fitting	10 N m
Install. torques cap nut	10 N m
Surface	Bright
Order no. bright	10030012
Type	EX-KVM-24-W-16
Packing unit	1

Your Contact:

WISKA Hoppmann GmbH

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com

ETIM-Classification

EC000441

**Recommended accessories**



<b>GM 24</b>	50011420
<b>GM 30</b>	50011421

14.01.2021

Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

 +49-4191-508-0 ·  +49-4191-508-209

contact@wiska.de · www.wiska.com



Your Contact:

**WISKA Hoppmann GmbH**

Kisdorfer Weg 28 · 24568 Kaltenkirchen · Germany

☎ +49-4191-508-0 · 📠 +49-4191-508-209

contact@wiska.de · www.wiska.com